




Color: white

Technical data	
Marking method	Thermal transfer
Marking	plain
Delivery form	Roll
Delivery form configuration	3,000 labels/reel; 2 lines
Printing device	Smart Printer (thermal transfer printer)
Physical data	
Depth	0.26 mm
Marking surface	8 x 20 mm
Mechanical data	
Mounting type	Sticking
Smear resistance	in conjunction with 258-5005 Ink Ribbon
Material data	
Color	white
Material	Plastic-coated cotton fabric
UV resistance	EN 60068-2-5:2010 Procedure B
Adhesive information	Natural rubber
Halogen-free	Yes
Weight	71.6 g
Fire load	0 MJ

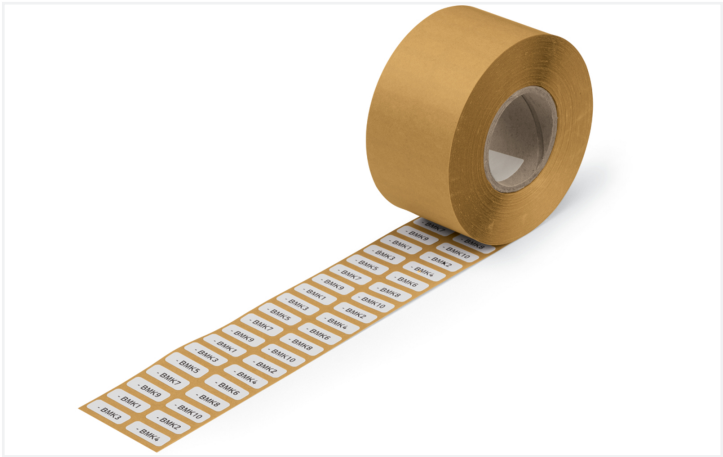

Environmental requirements	
Ambient temperature (storage)	+10 ... +21 °C
Ambient temperature (operation)	+180 °C
Relative humidity	40 ... 50 %

Commercial data	
Product Group	2 (Terminal Block Accessories)
eCl@ss 10.0	27-40-06-29
eCl@ss 9.0	27-40-06-29
ETIM 9.0	EC001288
ETIM 8.0	EC001288
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	DE
GTIN	4050821674887
Customs tariff number	58071090000

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Downloads

Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 210-811	

Documentation

Operating Instructions			
210-811 Handhabungshinweis zum Druckmaterial	1 28.08.2020	pdf 1397.18 KB	

1 Compatible Products

1.1 Optional Accessories

1.1.1 Marking

1.1.1.1 Marking device



Item No.: 258-5000
Thermal transfer printer; Smart Printer; for complete control cabinet marking; 300 dpi; With marking material