


Walraven starQuick® Clamp (Grey)

(C0505)

for securing conduits and pipes to walls, floors, or ceilings

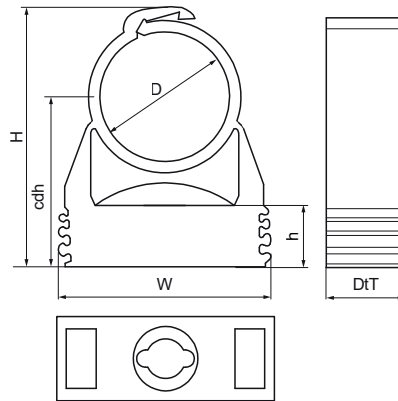

Features & benefits

- one-part clamp
- clamp closes by applying pressure to the pipe
- for outdoor use and installations in swimming pool environments, chemical factories, zinc factories, etc.
- due to a patented profile it is possible to tack several clamps to each other
- material: modified PA6 (polyamide), grey (according to RAL 7035)
- resistant to UV, ageing, oil and petrol
- no corrosion, recyclable, halogen free
- temperature resistance from approx. -40 °C to approx. +90 °C (constant); short to approx. +130 °C



Product Number	VVS Number	Outside Pipe Diameter	Fixing Hole	Total Height	Total Width	Total Depth	Clamp Center Distance Height	Height	Connection Thread	Maximum Allowed Load Faz	Breaking Load Fbz
Reference Letter		D	FH	H	W	Dt	cdh	h	G	Fa,z	Fb,z
Unit description		mm	mm	mm	mm	mm	mm	mm		N	N
0854010	18035412	10 - 12	8	34	29	17	24	10.6	None	170	500
0854012	18035414	12 - 14	8	36	29	17	25	10.6	None	180	550
0854015	18035416	14 - 16	8	36	29	17	25	10.6	None	200	600
0854018	18035420	16 - 20	8	40	29	17	27	10.6	None	230	700
0854022	18035423	20 - 23	8	43	29	17	28	10.6	None	270	800
0854028	18035228	24 - 28	8	50	40	18	32	10.6	None	280	850
0854031	18035432	28 - 32	8	55	40	17	36	10.6	None	300	900
0854035	18035235	32 - 35	8	59	43	17	37	10.6	None	330	1,000
0854038	18035440	35 - 40	8	68	47	17	44	12.1	None	330	1,000
0854042	18035444	40 - 44	8	70	52	17	44	12.1	None	330	1,000
0854050	18035450	44 - 50	8	79	57	17	50	12.1	None	330	1,000
0854054	18035455	48 - 55	8	82	63	17	50	12.1	None	330	1,000
0854063	18035465	59 - 65	8	95	74	20	57	12.1	None	500	1,500