



PHOTOMETRIC LIGHT REPORT

**GU10 | silver | 5W | 24° |
2700K | CRI>92**

Article number: 175-137



Go to the
webshop
of Tronix
Lighting



TRONIX

175-137 GU10 | silver | 5W | 24° | 2700K | CRI>92

Introduction

Purpose of this Document

This document provides accurate and objective photometric data for Tronix Lighting item 175-137. All information is based on actual measurements taken from standard production units. No modifications were made to enhance performance results. In some cases, minor adjustments—such as temporary removal of covers, cables, or mounting features—were necessary for testing purposes. These did not influence product performance.

Test Methodology

Testing was conducted using randomly selected, unopened samples from regular inventory. All tests comply with the LM-79-19 standard, the recognized method for photometric and electrical measurements of LED and OLED luminaires. This standard, an update of IES LM-79-2008, outlines environmental test conditions, stabilization procedures, measurement methods, and approved instruments. It uses absolute photometry, meaning results directly reflect the performance of the tested product, without comparison to rated lamp standards.

Product 175-137 was tested using:

- A photogoniometer to measure luminous intensity distribution at various angles
- An integrating sphere to determine total luminous flux and colour characteristics

Compliance & Certification

Item 175-137 meets the requirements of the following EU directives. Tronix Lighting certifies that all relevant tests were executed in accordance with the applicable standards, and the CE mark is applied accordingly:

- General Product Safety – Directive 2023/988/EC
- Low Voltage Directive (LVD) – Directive 2014/35/EU
- Electromagnetic Compatibility (EMC) – Directive 2004/108/EC
- Ecodesign – Directive 2009/125/EC
- RoHS 3 – Directive 2011/65/EU + Amendment 2015/863/EU

Recycling & Sustainability

Tronix Lighting is affiliated with national recycling systems for electrical and electronic waste. The luminaire is over 90% recyclable when disposed of as electronic waste at end of life. In addition, Tronix Lighting participates in national packaging recycling schemes, ensuring full compliance with both the WEEE and packaging directives.

175-137 GU10 | silver | 5W | 24° | 2700K | CRI>92

Laboratory and equipment

Laboratory owner and location	Tronix Lighting BV. Uden. The Netherlands
Gonio spectrometer system and type	Viso Systems Type C. horizontal
Spectrometer manufacturer and model	(Gonio) Ocean Optics STS VIS (Sphere) Admesy HERA VIS 380–780nm
Flicker meter manufacturer and model	Viso Systems LabFlicker
Oscilloscope manufacturer and model	Tektronix MDO3024 oscilloscope (4 Channels. 200 MHz)
Power meter manufacturer and model	Vitretek PA900 Precision Multi-Channel Harmonic Power Analyzer
Power source manufacturer and model	(DC) Keithley Source Measure Unit SMU-2420 3A DC Source Meter (AC) Chroma 61601 AC Source
Datalogger Manufacturer and Model	Omega 8-Channel Thermocouple Thermometer/Data Logger

Measurement conditions gonio spectrometer

Number of C-planes and Resolution	2 planes – 180°
γ (gamma)-Resolution	1°
Test Distance	0.66 m
Room Temperature and Humidity	22°C +/- 10% – RH 50% +/- 20%
Input Power. Power and Displacement Factors	5.1 W – PF 0.87 – DPF 0.9
Frequency of Input Power	50 Hz
Warm-up Time and Variation	Lamp stabilized in 26 min 1 sec --8.0%

Tested light source

Manufacturer and Order Code	Tronix Lighting – 175-137
Product Description	GU10 silver 5W 24° 2700K CRI>92

Main Light Measurement Results

Output – Total Lumen (Up% / Down%)	233 lm – 0.48% / 99.52%
Efficiency	46 lm/W
Energy efficiency class	G
Peak Intensity and Beam Angle	842 cd – 29.6°
Correlated Colour Temperature	CCT = 2731 K
Colour Shift. CIE duv	Duv -0.0008
Colour Rendering Index	CRI 90.8
Colour Rendering TM30-18	R _f 88.3 – R _g 94.7
Television Lighting Consistency Index	TLCI = 88
Flicker	SVM 0.03 – PstLM 0.34



175-137 GU10 | silver | 5W | 24° | 2700K | CRI>92


Electrical measurement details

Input Power

RMS Input voltage feed. V_{RMS}
RMS Input current feed. I_{RMS}
Total input power

Frequency of input power
Power factor
Displacement power factor

Total harmonic distortion of the current
Total harmonic distortion of the voltage

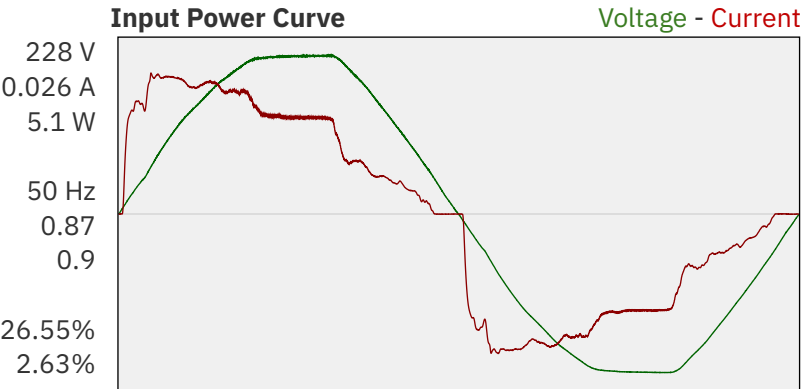


Efficiency

Radiated power efficiency: 15.7%

Lumen efficiency: 46 lm/W

Harmonics

3rd Harmonic
5th Harmonic
7th Harmonic
9th Harmonic
11th Harmonic

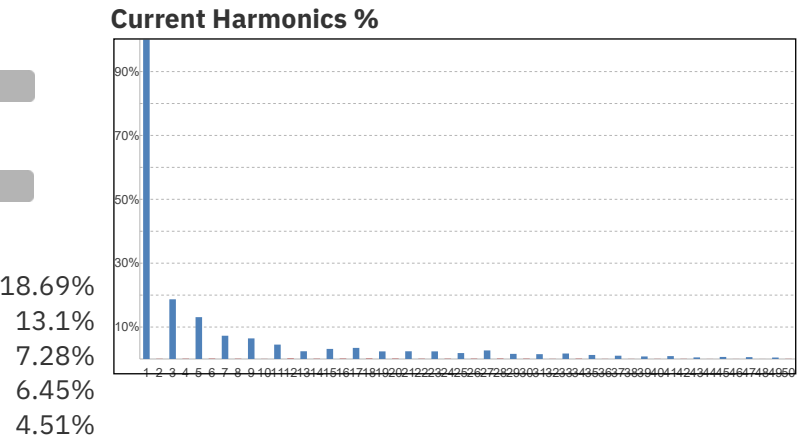

Stabilization Details

Warm-up Conditions

Stable period
Stable change max
Minimum warm-up time

Colour temperature change during warm-up		
15 min	CCT start	2734 K
2.0%	CCT shift	-3 K
15 min	CCT end	2731 K

Warm-up Results

Total warmup time
Warmup variation

Lamp stabilized in 26 min 1 sec
-8.0%

Output intensity change during warm-up

Output start	253 lm
Output change	-20 lm
Output end	233 lm


175-137 GU10 | silver | 5W | 24° | 2700K | CRI>92

Colour measurement details


Total lumen output 233 lm
 Correlated Colour Temperature 2731 K
 Colour coordinates CIE 1931 (x;y) = (0.456;0.408)
 Colour deviation from BBL Duv = -0.0008

TM30-18 Colour Fidelity Index R_f 88.3
 TM30-18 Colour Gamut Index R_g 94.7
 Colour Rendering Index (Ra) CRI 90.8
 Colour Rendering Index. (red component) $R_9 = 49.5$


Colour Quality Scale CQS = 89.2
 Television Lighting Consistency Index TLCI = 88

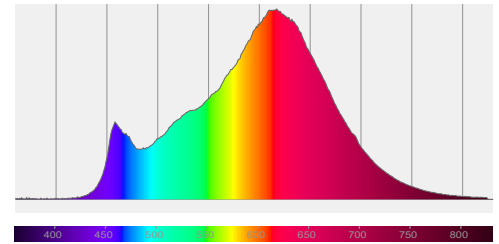

Relative spectral power distribution

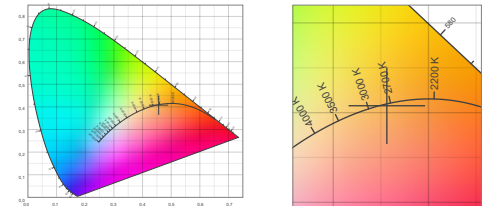

TM30 details

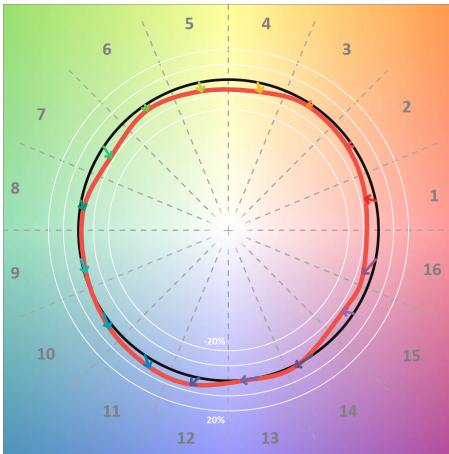


TM30 Colour vectors per hue bin




TM30 Colour distortion


Hue Bin	R_f	Shifts (%)	
		Chroma	Hue
C1	86	-6%	3%
C2	90	-4%	3%
C3	93	-2%	2%
C4	90	-6%	-3%
C5	93	-6%	0%
C6	93	-4%	1%
C7	87	-8%	3%
C8	91	-3%	5%
C9	86	-2%	9%
C10	86	2%	10%
C11	89	5%	7%
C12	89	6%	-4%
C13	86	0%	-11%
C14	84	0%	-13%
C15	87	-7%	-2%
C16	82	-7%	-11%

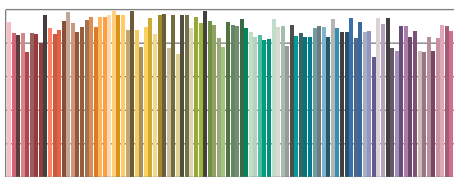

TM30-18 R_f -values per reference colour

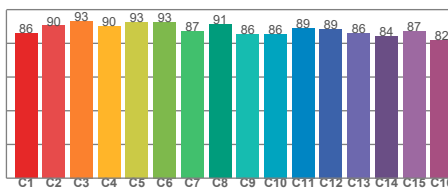


TM30-18 R_f -values per hue bin

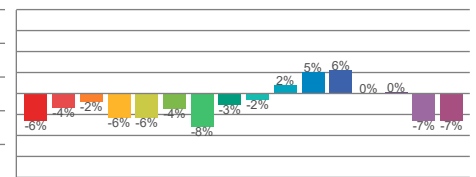


TM30 Chroma shift

Colour Quality details

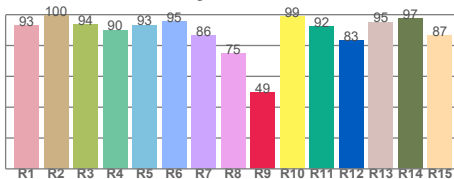

Colour Rendering Index

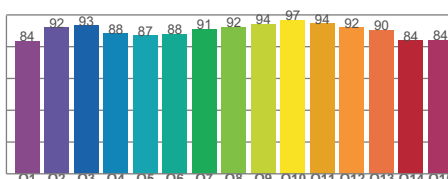

Colour Quality Scale

175-137 GU10 | silver | 5W | 24° | 2700K | CRI>92

Flicker / temporal light artefacts details

Measurement conditions

Flicker meter type	Viso Systems LabFlicker
Flicker/TLA sample rate	20000 samples/s
Measurement time	5x 180 seconds (15 minutes) for PstLM. 1.2 sec for all other indices

Flicker indices according to Illuminating Engineering Society (IES)

Flicker frequency	99.5 Hz
Percent flicker	1.12 %
Flicker index	0


TLA indices (according IEC TR 61547-1, EN 61000-3-3 and EN 61000-4-15)

An LED luminaire is considered flicker-free if the SVM value is ≤ 0.4 and if the PstLM value is ≤ 1.0


PstLM value ($F < 80$ Hz) 0.34

SVM value ($80 < F < 2000$ Hz) 0.03


Flicker frame (one flicker period in time domain)

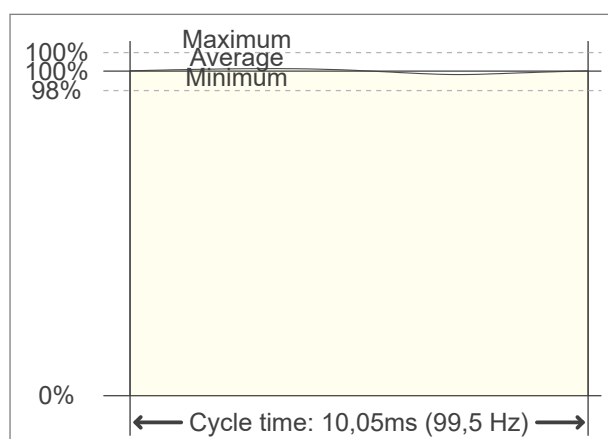

Flicker FFT (flicker curve in frequency domain)

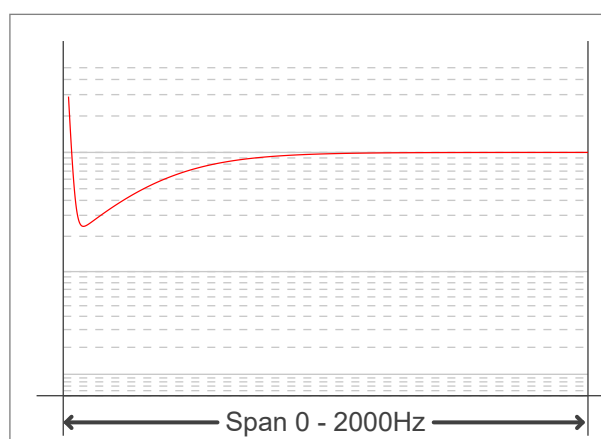

IEEE 1789-2015 Lighting Flicker Risk Zones

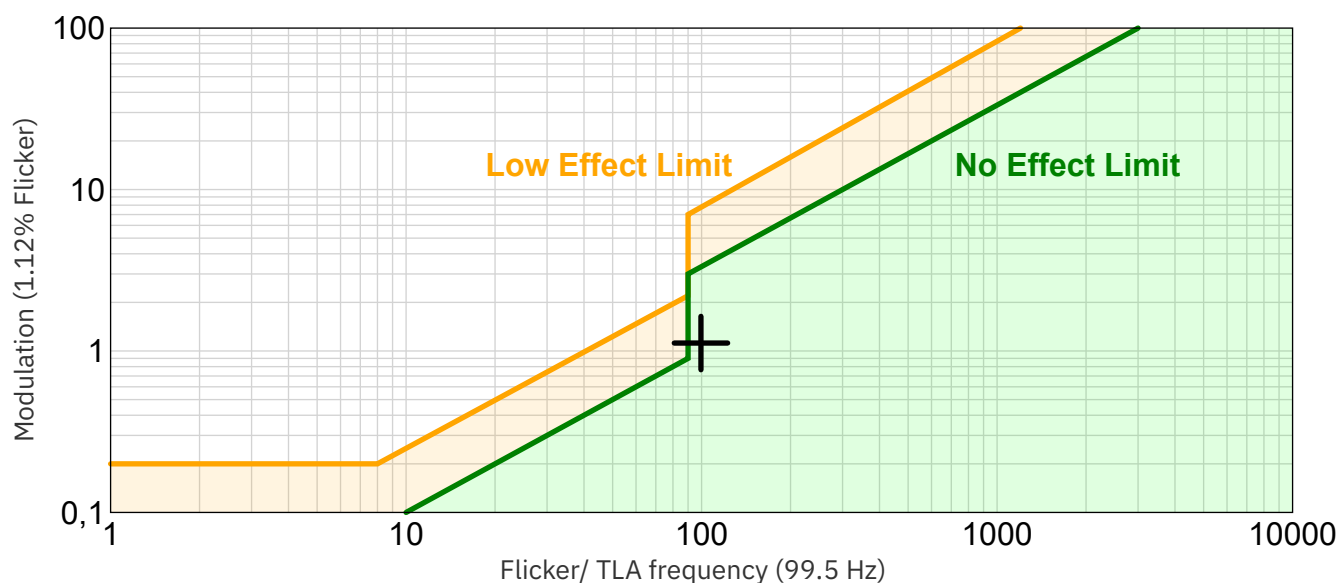


Document revision date: 3-7-2025 Measurement serial: VFR-250630-9931-SW

175-137 GU10 | silver | 5W | 24° | 2700K | CRI>92

Beam angle

Luminous Intensity diagram

Unit: 0-100% of peak intensity

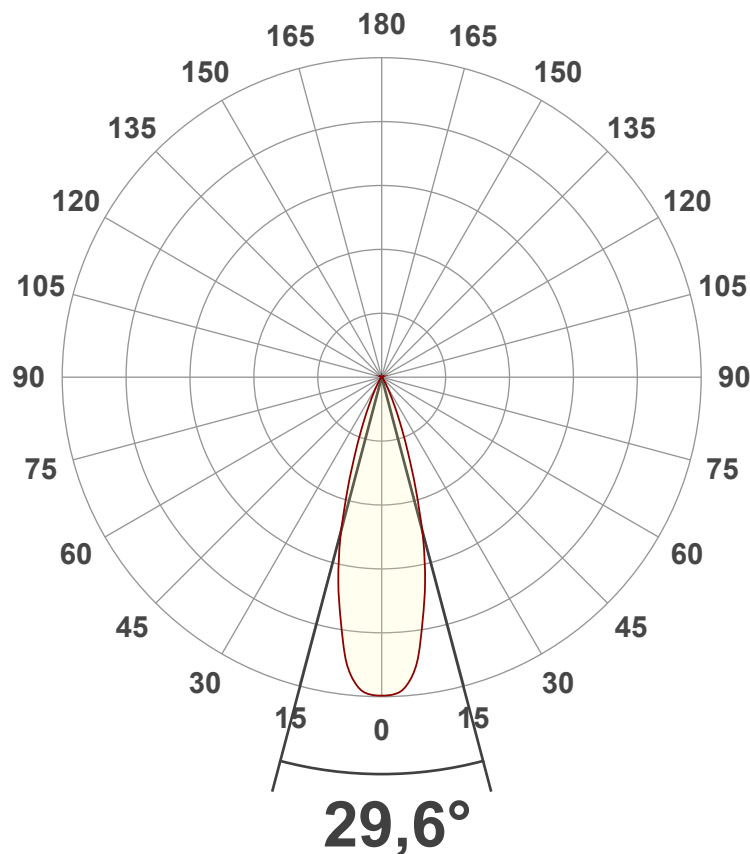

Main Values

Output (total Lumen)	233 lm
Lumen Up/Down	0.48% / 99.52%
Peak Intensity	842 cd
Beam Angle (50%)	29.6°
Beam Angle (90%)	29.6°
Beam Angle (10%)	29.6°

Cut-off Angle

Average 2.5%	62.7°
--------------	-------

Field Angle

Average 10%	48.3°
-------------	-------


Intensity Ratio

In 120° cone	98.5%
In 90° cone	97.1%

C planes

C000-C180
C090-C270


Linear distribution diagram - Intensity (candela) vs γ-angle

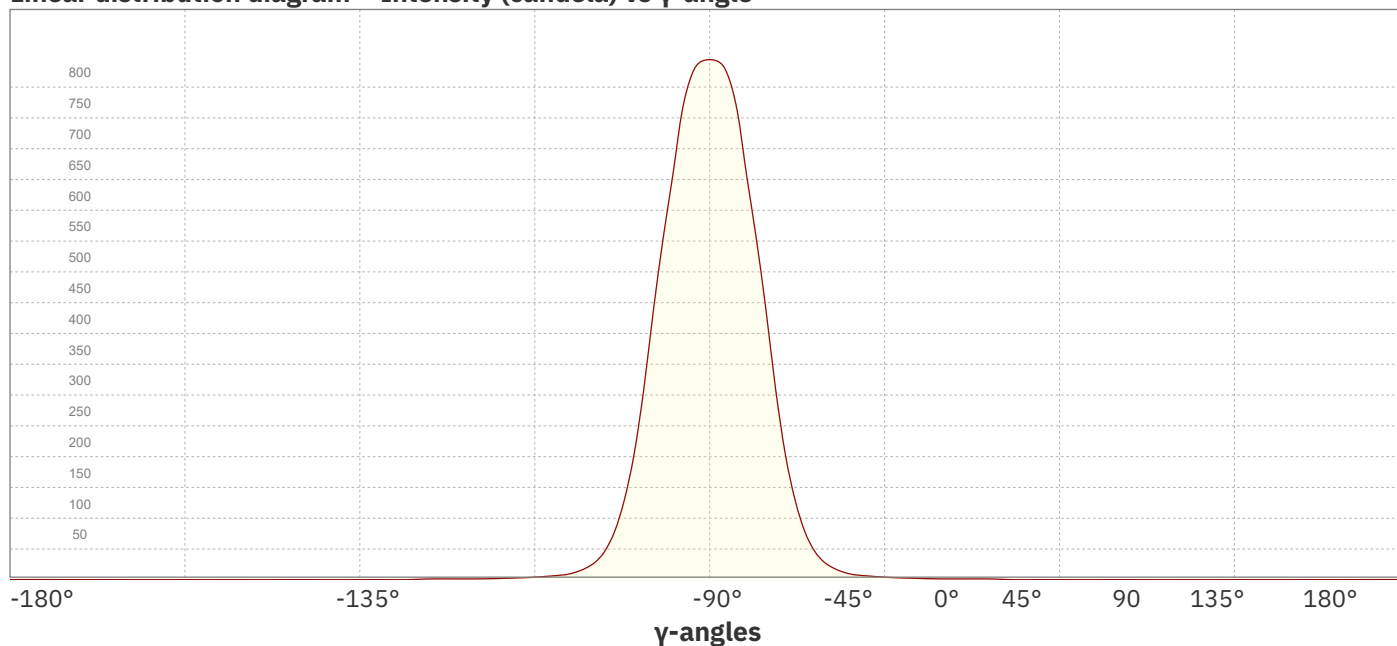

Document revision date: 3-7-2025 Measurement serial: VFR-250630-9931-SW

175-137 GU10 | silver | 5W | 24° | 2700K | CRI>92

Beam Details

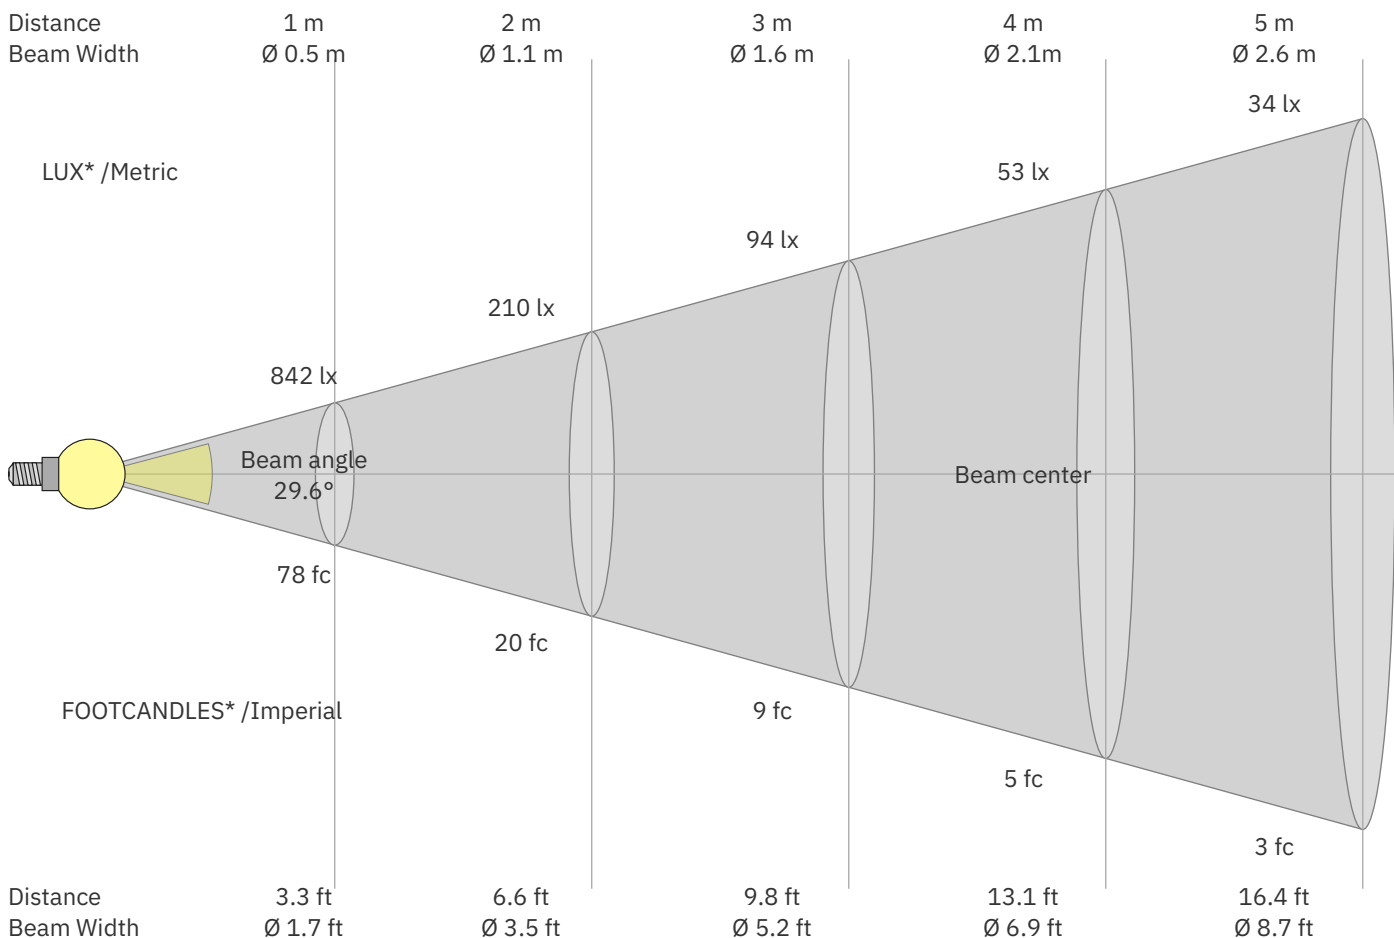

*Measured at center of beam

Beam intensities from 1 – 20 m

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	m
3.3	6.6	9.8	13.1	16.4	19.7	23	26.2	29.5	32.8	36.1	39.4	42.7	45.9	49.2	52.5	55.8	59.1	62.3	65.6	ft
842	210	94	53	34	23	17	13	10	8	7	6	5	4	4	3	3	3	2	2	lux
78.2	19.6	8.7	4.9	3.1	2.2	1.6	1.2	1	0.8	0.6	0.5	0.5	0.4	0.3	0.3	0.3	0.2	0.2	0.2	fc

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
842	842	825	787	721	636	553	460	359	265	187	129	88	59	39	26	19	13	10	8	cd
100%	100%	98%	93%	86%	76%	66%	55%	43%	31%	22%	15%	10%	7%	5%	3%	2%	2%	1%	1%	of 0°val

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
842	842	825	787	721	636	553	460	359	265	187	129	88	59	39	26	19	13	10	8	cd
100%	100%	98%	93%	86%	76%	66%	55%	43%	31%	22%	15%	10%	7%	5%	3%	2%	2%	1%	1%	of 0°val

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
842	842	825	787	721	636	553	460	359	265	187	129	88	59	39	26	19	13	10	8	cd
100%	100%	98%	93%	86%	76%	66%	55%	43%	31%	22%	15%	10%	7%	5%	3%	2%	2%	1%	1%	of 0°val

Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
842	842	825	787	721	636	553	460	359	265	187	129	88	59	39	26	19	13	10	8	cd
100%	100%	98%	93%	86%	76%	66%	55%	43%	31%	22%	15%	10%	7%	5%	3%	2%	2%	1%	1%	of 0°val

Document revision date: 3-7-2025 Measurement serial: VFR-250630-9931-SW

175-137 GU10 | silver | 5W | 24° | 2700K | CRI>92

Light Planning – UGR table

Uncorrected, comprehensive UGR table according to CIE 117-1995

Reflectances		70	70	50	50	30	70	70	50	50	30
ρ Ceiling		70	70	50	50	30	70	70	50	50	30
ρ Walls		50	30	50	30	30	50	30	50	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20
Room size		Viewed Crosswise					Viewed Endwise				
H = mounting height above eye level		(Viewing direction orthogonal to lamp length axis)					(Viewing direction parallel to lamp length axis)				
X	Y										
2H	2H	7.6	8.0	7.7	8.2	8.4	7.6	8.0	7.7	8.2	8.4
	3H	8.6	9.2	9.0	9.4	9.6	8.6	9.2	9.0	9.4	9.6
	4H	9.2	9.7	9.6	10.0	10.2	9.2	9.7	9.6	10.0	10.2
	6H	9.2	9.7	9.5	10.0	10.4	9.2	9.7	9.5	10.0	10.4
	8H	9.2	9.7	9.6	10.0	10.4	9.2	9.7	9.6	10.0	10.4
	12H	9.2	9.7	9.6	10.0	10.5	9.2	9.7	9.6	10.0	10.5
4H	2H	7.7	8.3	8.1	8.5	8.8	7.7	8.3	8.1	8.5	8.8
	3H	9.3	9.8	9.7	10.1	10.6	9.3	9.8	9.7	10.1	10.6
	4H	9.9	10.3	10.3	10.7	11.2	9.9	10.3	10.3	10.7	11.2
	6H	9.9	10.4	10.4	10.7	11.1	9.9	10.4	10.4	10.7	11.1
	8H	9.9	10.3	10.4	10.7	11.0	9.9	10.3	10.4	10.7	11.0
	12H	9.9	10.2	10.4	10.7	11.1	9.9	10.2	10.4	10.7	11.1
8H	4H	10.0	10.4	10.5	10.8	11.1	10.0	10.4	10.5	10.8	11.1
	6H	10.0	10.3	10.6	10.8	11.3	10.0	10.3	10.6	10.8	11.3
	8H	10.1	10.3	10.6	10.9	11.5	10.1	10.3	10.6	10.9	11.5
	12H	10.2	10.4	10.8	10.9	11.5	10.2	10.4	10.8	10.9	11.5
12H	4H	9.9	10.3	10.4	10.7	11.1	9.9	10.3	10.4	10.7	11.1
	6H	10.1	10.3	10.6	10.8	11.4	10.1	10.3	10.6	10.8	11.4
	8H	10.1	10.3	10.7	10.8	11.4	10.1	10.3	10.7	10.8	11.4
Variations with the observer position for the luminaire spacings. S:											
S = 1.0H		1.5 / -0.7					1.5 / -0.7				
S = 1.5H		3.1 / -1.1					3.1 / -1.1				
S = 2.0H		4.6 / -1.3					4.6 / -1.3				

Coefficients of Utilization

Ceiling reflectance	80			70			50			30			10			0		
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio)																	
	Room Values are expressed as percentage of Lumen delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	112	110	108	112	110	108	107	106	105	103	102	101	100	99	98	97	96
2	111	107	103	101	108	105	102	100	102	99	97	99	97	95	96	95	93	92
3	107	102	98	95	105	100	97	94	98	95	93	95	93	91	93	91	90	88
4	103	97	93	90	102	96	93	90	94	91	88	92	90	87	91	88	86	85
5	100	94	89	86	98	93	89	86	91	88	85	89	86	84	88	85	83	82
6	97	90	86	83	95	89	85	82	88	84	82	87	84	81	86	83	81	80
7	94	87	83	80	93	86	82	79	85	82	79	84	81	78	83	80	78	77
8	91	84	80	77	90	84	79	77	83	79	76	82	78	76	81	78	76	75
9	88	81	77	74	88	81	77	74	80	77	74	79	76	74	79	76	73	72
10	86	79	75	72	85	79	75	72	78	74	72	77	74	72	77	74	71	70