


## Walraven RapidRail® Light-Duty Channel

(G0406)

channels for light-duty applications

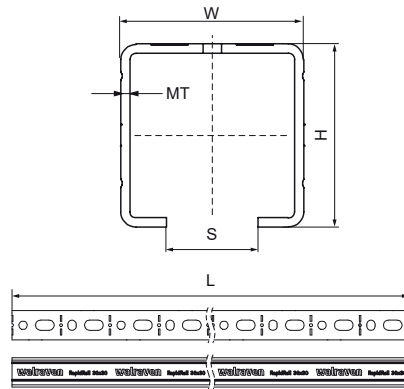

### Features & benefits

- C-profile
- for quick and adjustable fixing of one or multiple pipes
- with continuous perforation
- distance between rail end and first hole is always equal
- with sawing marks each 50 mm
- flexible hole pattern with anchor holes and also small holes to use wood screws
- unique hole pattern at rail 30x20 allows to click in Walraven RapidRail® Hammerfix from both sides
- special hole pattern and material thickness for 32x20 rail
- material: steel 1.0242
- pre-galvanized
- for more information about the max. allowed load (Faz) please refer to the loading tables or our online datasheet 'Technical Details Walraven RapidRail®'



Product Number	NRF Number	Type	Total Height	Total Width	Total Length	Material Thickness	Profile Opening
Reference Letter			H	W	L	MT	S
Unit description			mm	mm	mm	mm	mm
650527182	3486093	27x18	18	27	2,000	1.00	15
650527183	3486099	27x18	18	27	3,000	1.00	15
650527184	3486107	27x18	18	27	4,000	1.00	15
650527186	3486106	27x18	18	27	6,000	1.00	15
650530150	3486105	30x15	15	30	500	1.50	15
650530152	3486104	30x15	15	30	2,000	1.50	15
650530153	3486103	30x15	15	30	3,000	1.50	15
650530156	3486101	30x15	15	30	6,000	1.50	15
650530202	3486554	30x20	20	30	2,000	1.25	15
650530203	3486581	30x20	20	30	3,000	1.25	15
650530206	3486582	30x20	20	30	6,000	1.25	15
650530302	3486583	30x30	30	30	2,000	1.50	15
650530303	3486585	30x30	30	30	3,000	1.50	15
650530306	3486586	30x30	30	30	6,000	1.50	15