



Features

• Raxa presents a refined solution for lighting needs, combining aesthetic finesse with functional excellence Raxa is a modular linear track system, easy and fast to install on 3-circuit tracks Specific track adaptor that guarantees a safe electrical connection Aluminum body with a slim profile, 32mm only, neat and seamless installation on OneTrack UGR19 lenses, light beam angle:68° Textured white finishing colour. Light color temperature: 4000K, neutral white, Total system power: 10.6W, Fixture lumen output: 840lm, efficacy: 79lm/W, Ra90 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), IR/UV free light source without heat radiation, low flicker, non-dimmable driver Suitable for installation on 3-circuit tracks, please check compatibility list. Compatible with OneTrack, Lytespan Round, Lytespan H-Track. Electrical protection: Class I. Degree of protection: IP20, suitable for indoor environment only Nominal product dimensions: L.585mmx32mmx75mm


Product Overview

Product name	RAXA UGR19 600 CRI95 4000K WHITE
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
General application	Museums & Galleries, Office, Retail
ETIM Class	EC001744
Fixture luminous flux (lm)	840
Luminaire efficacy (lm/W)	79
Correlated colour temperature (k)	4000
Light colour	Neutral White

RAXA UGR19 600 CRI95 4000K WHITE 2016473

CRI (Ra)	95
Colour Variation Initial (SDCM)	3
Beam Angle (°)	68
Glare control	< 19
Photobiological Risk Group	RG0
Total power consumption (W)	10.6
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5025768164738
Warranty	5 years
Dimming method	N/A
Useful luminous flux (#use)	840

Photometry

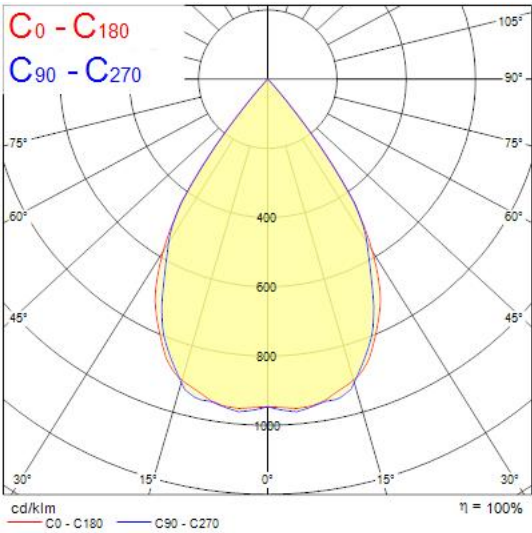

Technical drawings

