

# Data Sheet | Item Number: 713-1417/117-000


THR male header, 2-row; 0.8 x 0.8 mm solder pin; straight; 100% protected against mismatching; Threaded flange; Pin spacing 3.5 mm; 34-pole; black

<https://www.wago.com/713-1417/117-000>



Color: ■ black

Similar to illustration

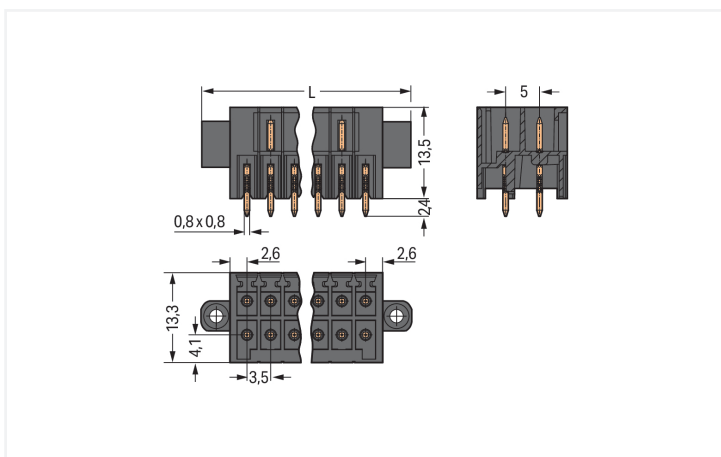

Dimensions in mm

$L = [(pole\ no./2) - 1] \times pin\ spacing + 13.6\ mm$



Male connector, 713 Series, solder pin dimensions 0.8 x 0.8 mm

Our male connector (item number 713-1417/117-000) simplifies electrical installations. Dimensions: (69.6 x 15.9 x 13.3) mm (width x height x depth).

Tin is used for coating the contact surfaces. THR is used to solder the pcb connector.

## Notes

## Safety Information

The MCS – MULTI CONNECTION SYSTEM includes connectors without breaking capacity in accordance with DIN EN 61984. When used as intended, these connectors must not be connected/disconnected when live or under load. When used as intended, these connectors must not be connected/disconnected when live or under load. The circuit design should ensure header pins, which can be touched, are not live when unmated.

## Variants:

Other pole numbers  
Other solder pin lengths  
Gold-plated or partially gold-plated contact surfaces  
Other versions (or variants) can be requested from WAGO Sales or configured at <https://configurator.wago.com/>.

## Electrical data

Ratings per	IEC/EN 60664-1			Approvals per	UL 1059		
Overvoltage category	III	III	II	Use group	B	C	D
Pollution degree	3	2	2	Rated voltage	150 V	50 V	-
Nominal voltage	80 V	160 V	250 V	Rated current	10 A	10 A	-
Rated impulse withstand voltage	2.5 kV	2.5 kV	2.5 kV				
Rated current	10 A	10 A	10 A				

Approvals per	CSA		
Use group	B	C	D
Rated voltage	150 V	-	-
Rated current	12 A	-	-

## Connection Data

Total number of potentials	34	<b>Connection 1</b>	
Number of connection types	1	Pole number	34
Number of levels	2		

## Physical data

Pin spacing	3.5 mm / 0.138 inches
Width	69.6 mm / 2.74 inches
Height	15.9 mm / 0.626 inches
Height from the surface	13.5 mm / 0.531 inches
Depth	13.3 mm / 0.524 inches
Solder pin length	2.4 mm
Solder pin dimensions	0.8 x 0.8 mm
Plated through-hole diameter (THR)	1.3 (+0.1) mm

## Mechanical data

Variable coding	Yes
Anti-rotation protection	Yes

### Plug-in connection

Contact type (pluggable connector)	Male connector/plug
Connector (connection type)	for PCB
Mismating protection	Yes
Mating direction to the PCB	90 °
Locking of plug-in connection	Threaded flange

### PCB contact

PCB contact	THR
Solder pin arrangement	over the entire male connector (in-line)
Number of solder pins per potential	1

### Material data

Note (material data)	<a href="#">Information on material specifications can be found here</a>
Color	black
Material group	I
Insulation material (main housing)	Polyphthalamide (PPA GF)
Flammability class per UL94	V0
Contact material	Electrolytic copper (E <sub>Cu</sub> )
Contact Plating	Tin
Fire load	0.183 MJ
Weight	9 g
MSL per J-STD 020D	1

### Environmental requirements

Limit temperature range	-60 ... +100 °C
Processing temperature	-35 ... +60 °C

### Commercial data

Product Group	3 (Multi Conn. System)
PU (SPU)	10 pcs
Packaging type	Box
Country of origin	PL
GTIN	4050821156543
Customs tariff number	85366930000

### Product Classification

UNSPSC	39121409
eCl@ss 10.0	27-44-04-02
eCl@ss 9.0	27-44-04-02
ETIM 9.0	EC002637
ETIM 10.0	EC002637
ECCN	NO US CLASSIFICATION

**Environmental Product Compliance**

RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	af48e96a-ec9f-4338-86cf-48d64d3f3838
SCIP notification number (Belgium)	338e5476-71ea-402e-9438-76ad71e30145
SCIP notification number (Bulgaria)	4bc4f899-e7ce-480a-9d26-197685eded6e
SCIP notification number (Czech Republic)	732e792d-df7e-4398-9b6c-d7ac88461d53
SCIP notification number (Denmark)	f4f4ce47-490a-4efd-9cb5-f5cfdc40bf73
SCIP notification number (Finland)	df298c78-2949-4de3-b029-04ad2ec953a3
SCIP notification number (France)	2eba0012-0ead-4d1e-8efb-c781f150c731
SCIP notification number (Germany)	3d141fdc-8056-4923-a1ee-7c052934c965
SCIP notification number (Hungary)	6e0d1345-e0f1-470f-a815-23516430aad2
SCIP notification number (Italy)	dd2c4105-48c9-4fe5-8990-3ae293e4008d
SCIP notification number (Netherlands)	026b4f3e-8d5f-4b7c-b3c2-e644413be379
SCIP notification number (Poland)	0c144db9-36cc-4ca5-a314-c2c3364f472c
SCIP notification number (Romania)	c2398c57-bc79-44e8-b717-0e24047be289
SCIP notification number (Sweden)	12202a27-656d-49e3-81ab-edd5495ec3c0

**Approvals / Certificates**

**General approvals**



Approval	Standard	Certificate Name
CB DEKRA Certification B.V.	IEC 61984	NL-102427
CSA CSA Group	C22.2	2315087
KEMA/KEUR DEKRA Certification B.V.	EN 61984	71-126089

**Downloads**

**Environmental Product Compliance**

Compliance Search	
Environmental Product Compliance 713-1417/117-000	<a href="#">↓</a>

**Documentation**

Additional Information			
Technical Section	03.04.2019	pdf 2027.26 KB	<a href="#">↓</a>
		pdf 535.32 KB	<a href="#">↓</a>

## CAD/CAE-Data

### CAD data

2D/3D Models  
713-1417/117-000



### CAE data

ZUKEN Portal  
713-1417/117-000



## PCB Design

Symbol and Footprint  
via SamacSys  
713-1417/117-000



Symbol and Footprint  
via Ultra Librarian  
713-1417/117-000



## 1 Compatible Products

### 1.1 System counterpart

#### 1.1.1 Female connector/socket



##### Item No.: [713-1117/107-000](#)

1-conductor female connector, 2-row; CA-GE CLAMP®; 1.5 mm<sup>2</sup>; Pin spacing 3.5 mm; 34-pole; 100% protected against mismatching; Screw flange; black

## 1.2 Optional Accessories

### 1.2.1 Coding

#### 1.2.1.1 Coding




##### Item No.: [714-101](#)

Coding key; orange

## Installation Notes

### Coding



Coding a male header by inserting a coding pin.