



PHOTOMETRIC LIGHT REPORT

Wall lamp | up/down | black | 5.5W | 3000K | non dim

Article number: 149-160



Go to the
webshop
of Tronix
Lighting



TRONIX



149-160 Wall lamp | up/down | black | 5.5W | 3000K | non dim

Introduction

Purpose of this Document

This document provides accurate and objective photometric data for Tronix Lighting item 149-160. All information is based on actual measurements taken from standard production units. No modifications were made to enhance performance results. In some cases, minor adjustments—such as temporary removal of covers, cables, or mounting features—were necessary for testing purposes. These did not influence product performance.

Test Methodology

Testing was conducted using randomly selected, unopened samples from regular inventory. All tests comply with the LM-79-19 standard, the recognized method for photometric and electrical measurements of LED and OLED luminaires. This standard, an update of IES LM-79-2008, outlines environmental test conditions, stabilization procedures, measurement methods, and approved instruments. It uses absolute photometry, meaning results directly reflect the performance of the tested product, without comparison to rated lamp standards.

Product 149-160 was tested using:

- A photogoniometer to measure luminous intensity distribution at various angles
- An integrating sphere to determine total luminous flux and colour characteristics

Compliance & Certification

Item 149-160 meets the requirements of the following EU directives. Tronix Lighting certifies that all relevant tests were executed in accordance with the applicable standards, and the CE mark is applied accordingly:

- General Product Safety – Directive 2023/988/EC
- Low Voltage Directive (LVD) – Directive 2014/35/EU
- Electromagnetic Compatibility (EMC) – Directive 2004/108/EC
- Ecodesign – Directive 2009/125/EC
- RoHS 3 – Directive 2011/65/EU + Amendment 2015/863/EU

Recycling & Sustainability

Tronix Lighting is affiliated with national recycling systems for electrical and electronic waste. The luminaire is over 90% recyclable when disposed of as electronic waste at end of life. In addition, Tronix Lighting participates in national packaging recycling schemes, ensuring full compliance with both the WEEE and packaging directives.

149-160 Wall lamp | up/down | black | 5.5W | 3000K | non dim

Laboratory and equipment

Laboratory owner and location	Tronix Lighting BV. Uden. The Netherlands
Gonio spectrometer system and type	Viso Systems Type C. horizontal
Spectrometer manufacturer and model	(Gonio) Ocean Optics STS VIS (Sphere) Admesy HERA VIS 380–780nm
Flicker meter manufacturer and model	Viso Systems LabFlicker
Oscilloscope manufacturer and model	Tektronix MDO3024 oscilloscope (4 Channels. 200 MHz)
Power meter manufacturer and model	Vitretek PA900 Precision Multi-Channel Harmonic Power Analyzer
Power source manufacturer and model	(DC) Keithley Source Measure Unit SMU-2420 3A DC Source Meter (AC) Chroma 61601 AC Source
Datalogger Manufacturer and Model	Omega 8-Channel Thermocouple Thermometer/Data Logger

Measurement conditions gonio spectrometer

Number of C-planes and Resolution	2 planes – 180°
γ (gamma)-Resolution	1°
Test Distance	1.14 m
Room Temperature and Humidity	22°C +/- 10% – RH 50% +/- 20%
Input Power. Power and Displacement Factors	5.9 W – PF 0.81 – DPF 0.9
Frequency of Input Power	50 Hz
Warm-up Time and Variation	n/a – n/a%

Tested light source

Manufacturer and Order Code	Tronix Lighting – 149-160
Product Description	Wall lamp up/down black 5.5W 3000K non dim

Main Light Measurement Results

Output – Total Lumen (Up% / Down%)	446 lm – 50% / 50%
Efficiency	75 lm/W
Energy efficiency class	G
Peak Intensity and Beam Angle	1852 cd – 360°
Correlated Colour Temperature	CCT = 3107 K
Colour Shift. CIE duv	Duv 0.0016
Colour Rendering Index	CRI 84.7
Colour Rendering TM30-18	R _f 86.9 – R _g 95.6
Television Lighting Consistency Index	TLCI = 73
Flicker	SVM 0.02 – PstLM 0.32

149-160 Wall lamp | up/down | black | 5.5W | 3000K | non dim

Electrical measurement details

Input Power

RMS Input voltage feed. V_{RMS}

231 V

RMS Input current feed. I_{RMS}

0.032 A

Total input power

5.9 W

Frequency of input power

50 Hz

Power factor

0.81

Displacement power factor

0.9

Total harmonic distortion of the current


48.77%

Total harmonic distortion of the voltage

2.39%

Input Power Curve

Voltage - Current

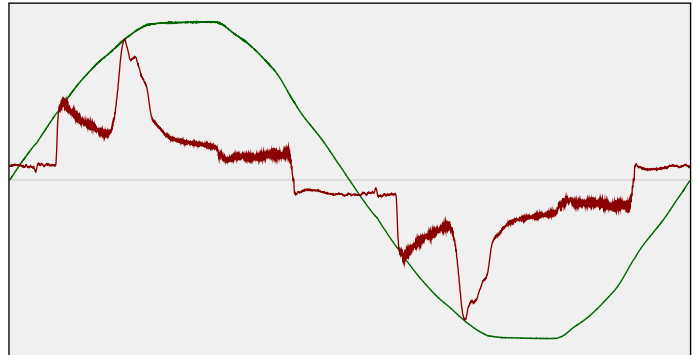

Efficiency

Radiated power efficiency: 23.0%



Lumen efficiency: 75 lm/W



Harmonics

3rd Harmonic

26.28%

5th Harmonic

21.32%

7th Harmonic

8.14%


9th Harmonic

20.62%

11th Harmonic

18.26%

Current Harmonics %

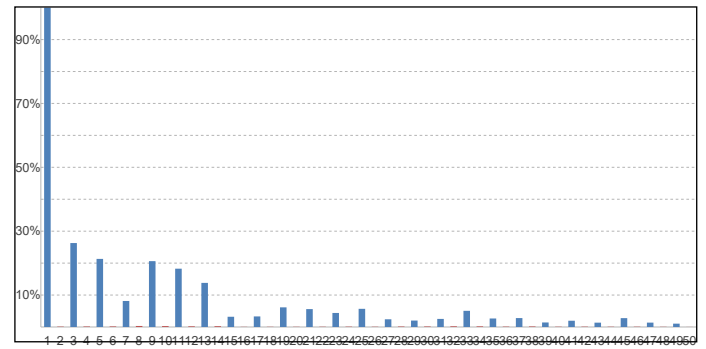

Stabilization Details

Warm-up Conditions

Stable period

n/a CCT start

n/a K

Stable change max

n/a% CCT shift

n/a K

Minimum warm-up time

n/a CCT end

3107 K

Warm-up Results

Total warmup time

n/a Output start

n/a lm

Warmup variation

n/a% Output change

n/a lm

Output intensity change during warm-up

Output end

446 lm


149-160 Wall lamp | up/down | black | 5.5W | 3000K | non dim

Colour measurement details


Total lumen output 446 lm
 Correlated Colour Temperature 3107 K
 Colour coordinates CIE 1931 (x;y) = (0.432;0.406)
 Colour deviation from BBL Duv = 0.0016

TM30-18 Colour Fidelity Index R_f 86.9
 TM30-18 Colour Gamut Index R_g 95.6
 Colour Rendering Index (Ra) CRI 84.7
 Colour Rendering Index. (red component) $R_9 = 13.0$


Colour Quality Scale CQS = 84.3
 Television Lighting Consistency Index TLCI = 73

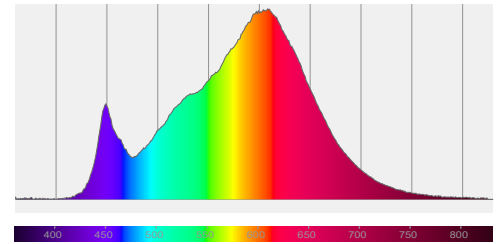

Relative spectral power distribution

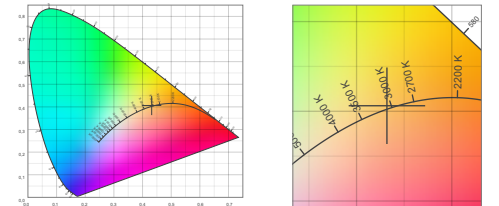

TM30 details

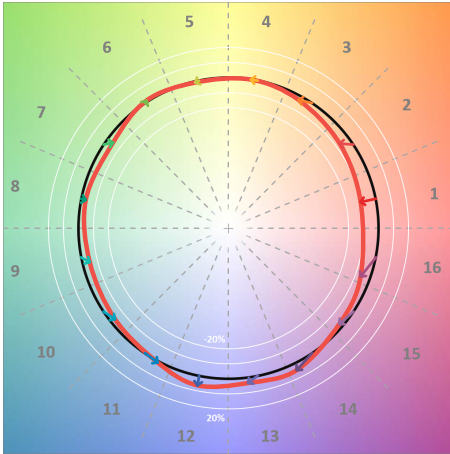


TM30 Colour vectors per hue bin




TM30 Colour distortion


Hue Bin	R_f	Shifts (%)	
		Chroma	Hue
C1	82	-10%	0%
C2	84	-7%	6%
C3	83	-3%	9%
C4	92	0%	5%
C5	94	-1%	3%
C6	95	1%	-2%
C7	89	-5%	-5%
C8	94	-3%	0%
C9	90	-5%	4%
C10	84	-4%	8%
C11	85	1%	10%
C12	88	7%	0%
C13	89	4%	-7%
C14	82	4%	-15%
C15	81	-3%	-12%
C16	79	-7%	-14%

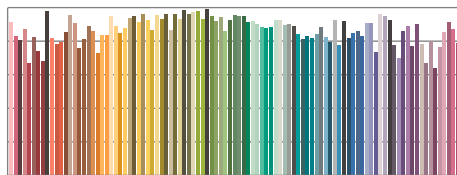

TM30-18 R_f -values per reference colour

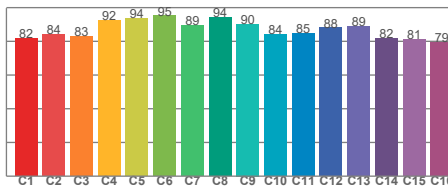


TM30-18 R_f -values per hue bin

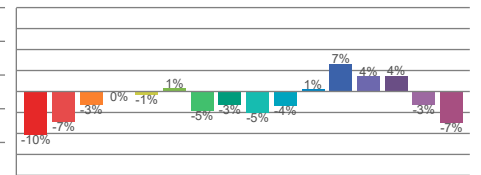


TM30 Chroma shift

Colour Quality details

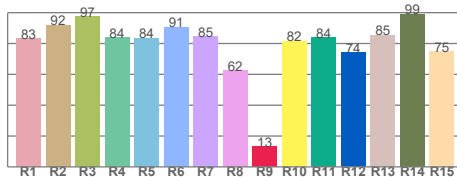

Colour Rendering Index

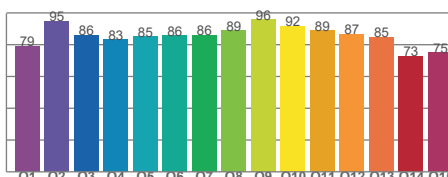

Colour Quality Scale

149-160 Wall lamp | up/down | black | 5.5W | 3000K | non dim

Flicker / temporal light artefacts details

Measurement conditions

Flicker meter type	Viso Systems LabFlicker
Flicker/TLA sample rate	20000 samples/s
Measurement time	5x 180 seconds (15 minutes) for PstLM. 1.2 sec for all other indices

Flicker indices according to Illuminating Engineering Society (IES)


Flicker frequency	101.52 Hz
Percent flicker	0.8 %
Flicker index	0

TLA indices (according IEC TR 61547-1, EN 61000-3-3 and EN 61000-4-15)


An LED luminaire is considered flicker-free if the SVM value is ≤ 0.4 and if the PstLM value is ≤ 1.0

PstLM value ($F < 80$ Hz)	0.32
SVM value ($80 < F < 2000$ Hz)	0.02


Flicker frame (one flicker period in time domain)

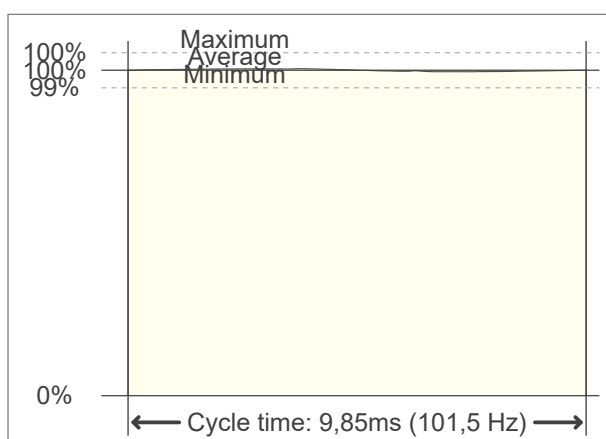

Flicker FFT (flicker curve in frequency domain)

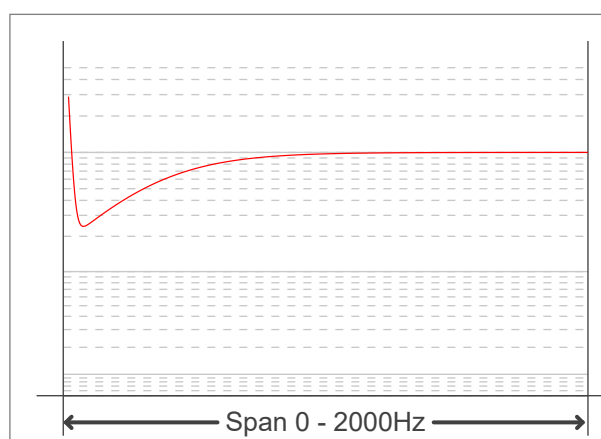

IEEE 1789-2015 Lighting Flicker Risk Zones

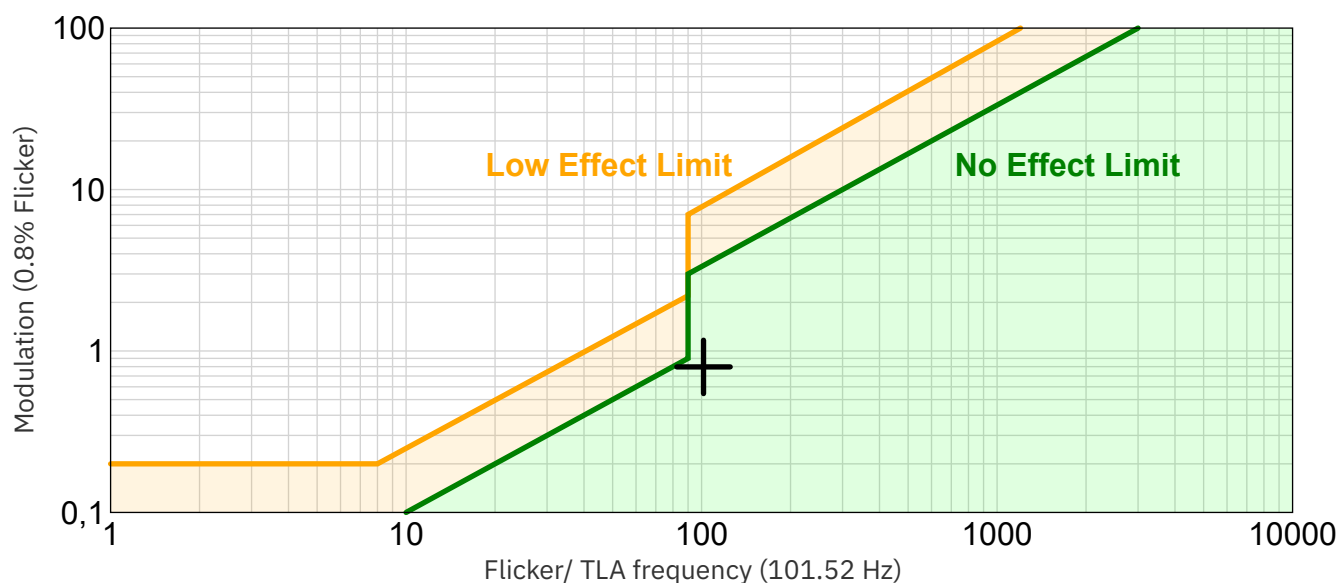


Document revision date: 1-7-2025 Measurement serial: VFR-250513-7369-SW

149-160 Wall lamp | up/down | black | 5.5W | 3000K | non dim

Beam angle

Luminous Intensity diagram

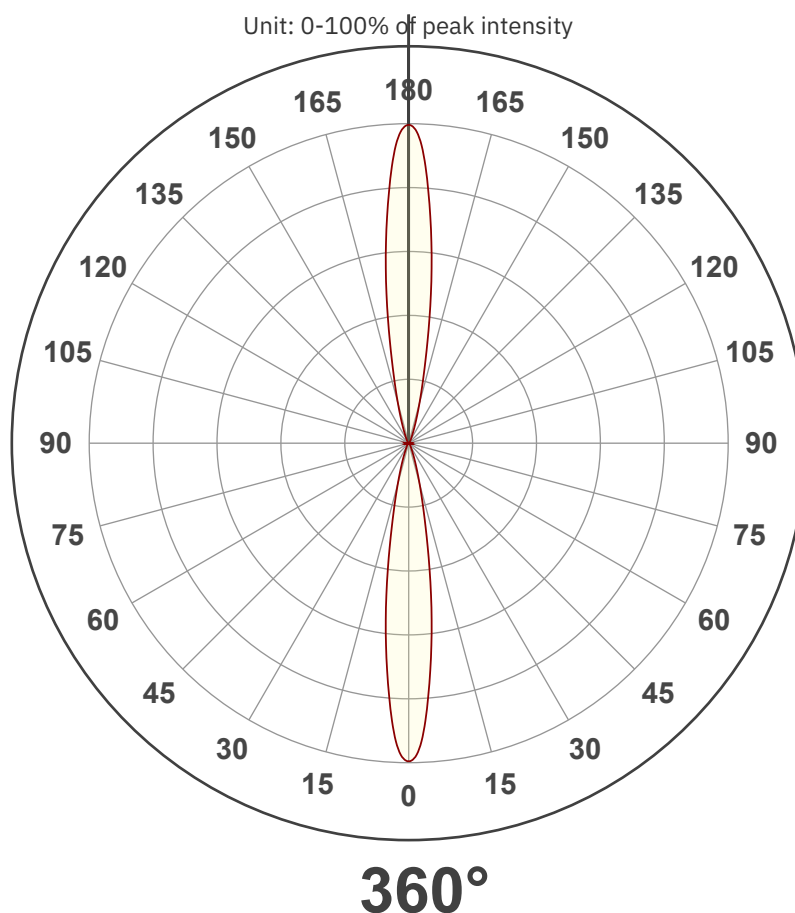

Main Values

Output (total Lumen)	446 lm
Lumen Up/Down	50% / 50%
Peak Intensity	1852 cd
Beam Angle (50%)	360°
Beam Angle (90%)	360°
Beam Angle (10%)	360°

Cut-off Angle

Average 2.5%	360°
--------------	------

Field Angle

Average 10%	360°
-------------	------


Intensity Ratio

In 120° cone	49.4%
In 90° cone	48.4%

C planes

C000-C180
C090-C270


Linear distribution diagram - Intensity (candela) vs γ-angle

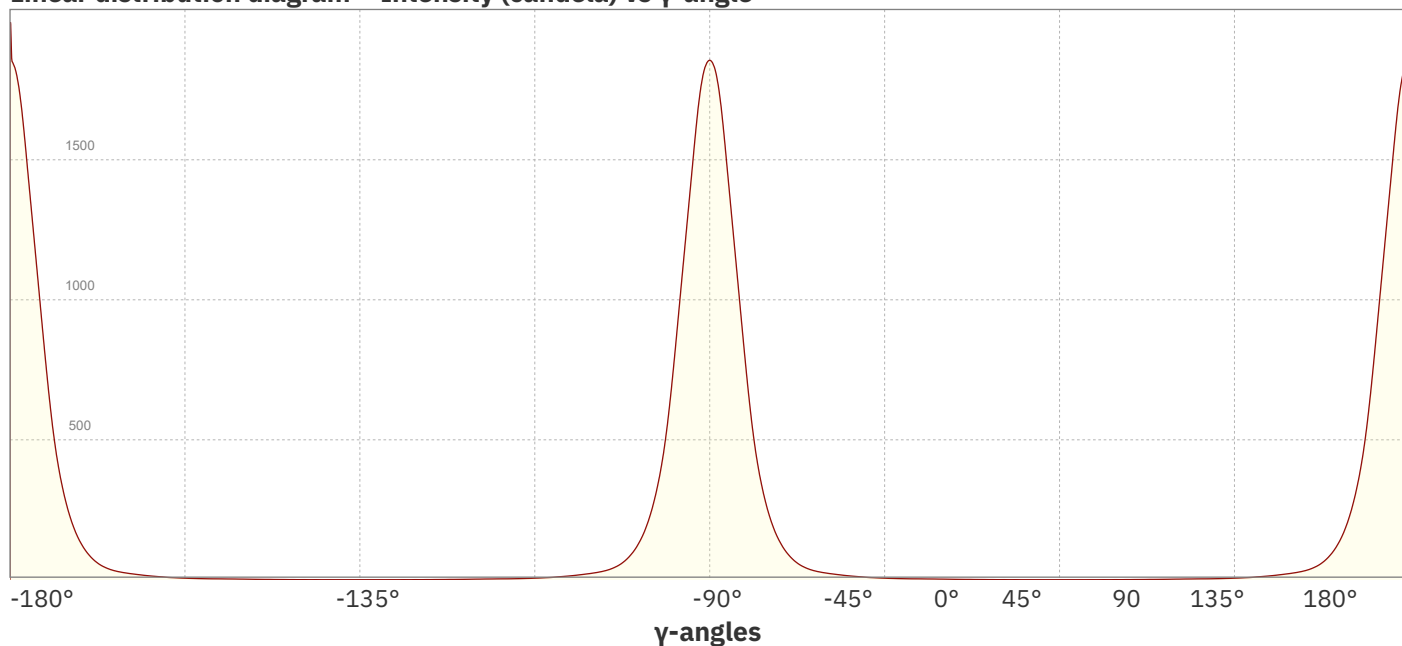

Document revision date: 1-7-2025 Measurement serial: VFR-250513-7369-SW

149-160 Wall lamp | up/down | black | 5.5W | 3000K | non dim

Beam Details

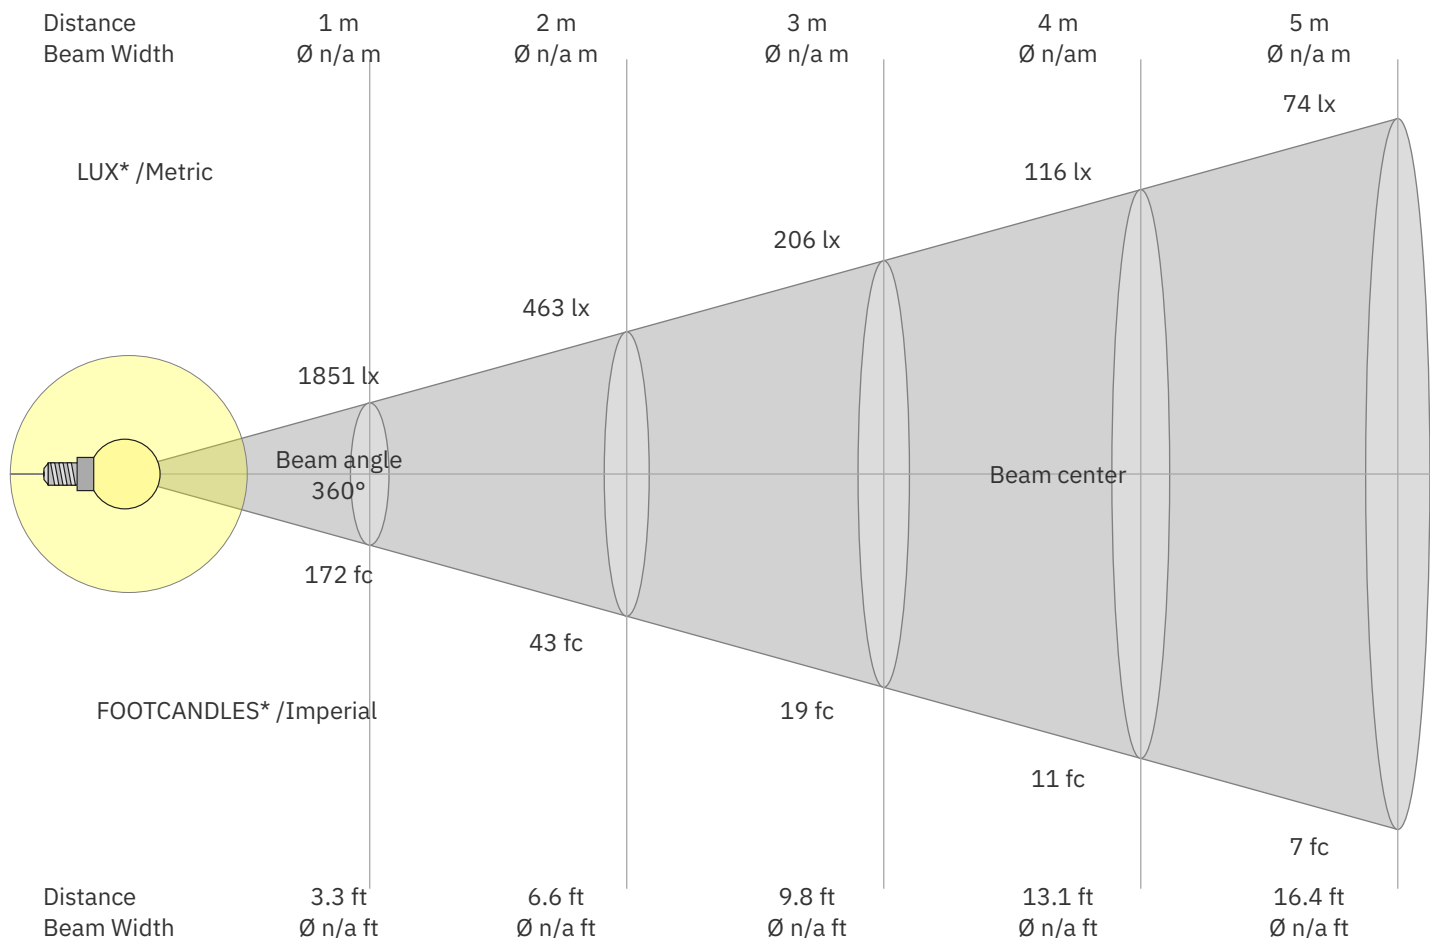

*Measured at center of beam

Beam intensities from 1 – 20 m

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	m
3.3	6.6	9.8	13.1	16.4	19.7	23	26.2	29.5	32.8	36.1	39.4	42.7	45.9	49.2	52.5	55.8	59.1	62.3	65.6	ft
1851	463	206	116	74	51	38	29	23	19	15	13	11	9	8	7	6	6	5	5	lux
172	43	19.1	10.7	6.9	4.8	3.5	2.7	2.1	1.7	1.4	1.2	1	0.9	0.8	0.7	0.6	0.5	0.5	0.4	fc

Intensities in 0° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°	γ
1851	802	137	32	14	6	3	2	1	0	0	0	1	2	3	6	14	32	137	802	cd
100%	43%	7%	2%	1%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	1%	2%	7%	43%	of 0°val

Intensities in 90° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°	γ
1851	802	137	32	14	6	3	2	1	0	0	0	1	2	3	6	14	32	137	802	cd
100%	43%	7%	2%	1%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	1%	2%	7%	43%	of 0°val

Intensities in 180° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°	γ
1851	802	137	32	14	6	3	2	1	0	0	0	1	2	3	6	14	32	137	802	cd
100%	43%	7%	2%	1%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	1%	2%	7%	43%	of 0°val

Intensities in 270° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°	γ
1851	802	137	32	14	6	3	2	1	0	0	0	1	2	3	6	14	32	137	802	cd
100%	43%	7%	2%	1%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	1%	2%	7%	43%	of 0°val

Document revision date: 1-7-2025 Measurement serial: VFR-250513-7369-SW



149-160 Wall lamp | up/down | black | 5.5W | 3000K | non dim

Light Planning – UGR table

Uncorrected, comprehensive UGR table according to CIE 117-1995

Reflectances		70	70	50	50	30	70	70	50	50	30
ρ Ceiling		70	70	50	50	30	70	70	50	50	30
ρ Walls		50	30	50	30	30	50	30	50	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20
Room size		Viewed Crosswise					Viewed Endwise				
H = mounting height above eye level		(Viewing direction orthogonal to lamp length axis)					(Viewing direction parallel to lamp length axis)				
X	Y										
2H	2H	4.6	5.1	5.4	5.9	6.9	4.6	5.1	5.4	5.9	6.9
	3H	4.7	5.2	5.7	6.0	7.0	4.7	5.2	5.7	6.0	7.0
	4H	4.7	5.2	5.7	6.0	7.1	4.7	5.2	5.7	6.0	7.1
	6H	4.7	5.1	5.6	6.0	7.1	4.7	5.1	5.6	6.0	7.1
	8H	4.7	5.1	5.6	6.0	7.1	4.7	5.1	5.6	6.0	7.1
	12H	4.6	5.2	5.6	6.0	7.1	4.6	5.2	5.6	6.0	7.1
4H	2H	4.5	5.0	5.4	5.8	6.8	4.5	5.0	5.4	5.8	6.8
	3H	4.8	5.3	5.7	6.1	7.2	4.8	5.3	5.7	6.1	7.2
	4H	4.8	5.6	5.7	6.1	7.2	4.8	5.6	5.7	6.1	7.2
	6H	4.8	5.2	5.8	6.0	7.1	4.8	5.2	5.8	6.0	7.1
	8H	4.8	5.1	5.8	6.0	7.1	4.8	5.1	5.8	6.0	7.1
	12H	4.8	5.0	5.7	6.0	7.1	4.8	5.0	5.7	6.0	7.1
8H	4H	4.6	4.9	5.6	5.9	7.0	4.6	4.9	5.6	5.9	7.0
	6H	4.7	4.9	5.7	5.9	7.1	4.7	4.9	5.7	5.9	7.1
	8H	4.7	4.9	5.8	5.9	7.1	4.7	4.9	5.8	5.9	7.1
	12H	4.8	4.9	5.8	5.9	7.1	4.8	4.9	5.8	5.9	7.1
12H	4H	4.6	4.8	5.6	5.8	6.9	4.6	4.8	5.6	5.8	6.9
	6H	4.7	4.8	5.7	5.9	7.0	4.7	4.8	5.7	5.9	7.0
	8H	4.7	4.8	5.7	5.9	7.0	4.7	4.8	5.7	5.9	7.0
Variations with the observer position for the luminaire spacings. S:											
S = 1.0H		1.9 / -1.3					1.9 / -1.3				
S = 1.5H		3.7 / -2.0					3.7 / -2.0				
S = 2.0H		5.3 / -3.1					5.3 / -3.1				

Coefficients of Utilization

Ceiling reflectance	80			70			50			30			10			0		
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio)			Room Values are expressed as percentage of Lumen delivered to the task surface														
0	107	107	107	107	99	99	99	99	83	83	83	69	69	69	56	56	56	50
1	101	98	95	93	93	91	88	86	78	76	75	66	65	64	54	54	53	48
2	95	90	86	82	88	84	80	77	73	70	68	62	61	59	53	52	51	47
3	90	83	78	74	84	78	74	70	68	65	63	59	58	56	51	50	49	45
4	85	78	72	68	79	73	68	65	65	61	59	57	55	53	50	48	47	44
5	81	73	67	63	76	69	64	60	62	58	55	55	52	50	48	47	46	43
6	77	69	63	59	72	65	60	57	59	55	53	53	50	48	47	45	44	42
7	74	65	59	56	69	62	57	54	56	53	50	51	48	47	46	44	43	41
8	71	62	56	53	67	59	54	51	54	51	48	49	47	45	45	43	42	40
9	68	59	54	50	64	57	52	49	52	49	46	48	45	44	44	42	41	39
10	65	57	52	48	62	55	50	47	50	47	45	47	44	42	43	41	40	38