

Twofold faceplate, vertical 71 mm centre distance, for a single and a double switch function, Niko Toggle steel champagne coated

166-57853


CE

4 year warranty

The Niko Toggle twofold vertically oriented faceplate clicks onto a single and a double switch function that have been horizontally installed next to each other with a centre distance of 71 mm. The faceplate combines with any available Niko Toggle single and double switch function. It consists of an upper frame, light guide and lower frame that are mechanically interconnected. The upper frame is made of steel. The lower frame is made of white, champagne coated polycarbonate (PC) + acrylic-styrene-acrylate (ASA). The upper frame is 2 mm thick and the lower frame 6 mm.

Niko recommends a design combination with a finishing set in the following colour: steel champagne coated.

- Exclusive materials
- Authentic vintage design
- Belgian design & craftsmanship
- Design matches Niko Pure portfolio
- Proven Niko quality
- Unique illuminated switch design (by adding feedback LED)

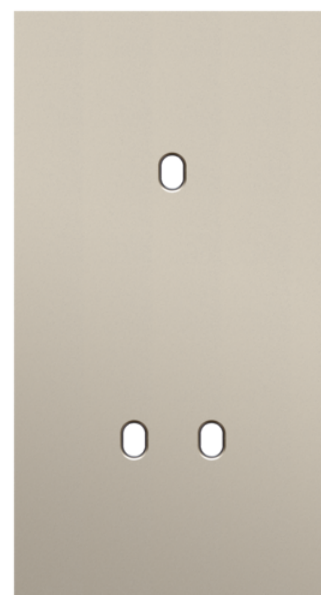

Technical data

Twofold faceplate, vertical 71 mm centre distance, for a single and a double switch function, Niko Toggle steel champagne coated.

- Double faceplate for two switches.
- Colour faceplate: steel champagne coated
- Colour RAL (approximately): 080 70 10
- Colour NCS (approximately): NCS S 4005-Y20R
- Recommended colour central plate: steel champagne coated
- Frame composition: It consists of an upper frame, light guide and lower frame that are mechanically interconnected.
- Material finishing: The upper frame is made of steel. The lower frame is made of white, champagne coated polycarbonate (PC) + acrylic-styrene-acrylate (ASA).
- Surface treatment: coated
- Surface finishing: matt
- Coating upper frame: the upper frame is enamelled champagne
- Coating lower frame: enamelled champagne

- Frame thickness: The upper frame is 2 mm thick and the lower frame 6 mm.
- Recess for indication led:
 - the faceplate is fitted with a light guide
 - the light guide is made of a translucent plastic
 - the light guide transports the light from the optional LED to the lever
 - please note that the faceplate should not be mounted upside down to ensure that the optional LED fits nicely with the light guide
- Surface-mounting height: max. 8.5 mm
- Halogen-free: yes
- Fire safety:
 - self-extinguishing: complies with a filament test of 650°C
- Centre-to-centre distance: 71 mm
- Protection degree: the combination of a mechanism, a central plate and a faceplate has a protection degree of IP20D
- Impact resistance: the combination of a mechanism, a central plate and a faceplate has an impact-resistance of IK06
- Dimensions (HxWxD): 154 mm x 83 mm x 13 mm
- Dimensions visible (HxWxD): 154 mm x 83 mm
- Marking: EU