


Concord

OPTIX LINEAR RECESSED 1200 4000K ALU EM

2023787

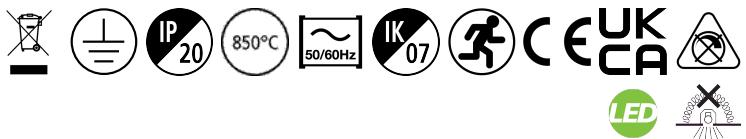

Features

- OPTIX LINEAR RECESSED 1200 4000K ALU EM is a high efficacy low glare linear luminaire for office and education applications. Suitable for continuous light line installations with accessories separately available. Ceiling recessed 1169x95x90 mm. Aluminised plastic extra low glare optics in a single line configuration. White RAL9016 fixture body. Constant current driver. 3hr maintained emergency version. 4000K Neutral White LED, CRI>80, chromaticity tolerance of 3-step MacAdam ellipse. Luminous flux 3400lm. Power consumption 26.5W. Luminaire efficacy 128lm/W. Lifespan: 48,500 hours L90B10. UGR<19, Luminance at 65°<200 Cd/m², IK07, IP20. Ultra Low Flicker: <5% Photobiological safety risk group 1. Electrical protection Class I. Glow wire test 850°C. Suitable for use with Linect quick connection systems.

Product Overview

Product name	OPTIX LINEAR RECESSED 1200 4000K ALU EM
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
General application	Education, Office
ETIM Class	EC002892
Fixture luminous flux (lm)	3400
Luminaire efficacy (lm/W)	128
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3


Concord
by SYLVANIA

Concord

OPTIX LINEAR RECESSED 1200 4000K ALU EM 2023787


Glare control	< 19
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	80
Total power consumption (W)	26.5
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9016
IP rating	IP20
IK rating	IK07
Product EAN number	5025768237876
Warranty	5 years
Dimming method	N/A

Photometry

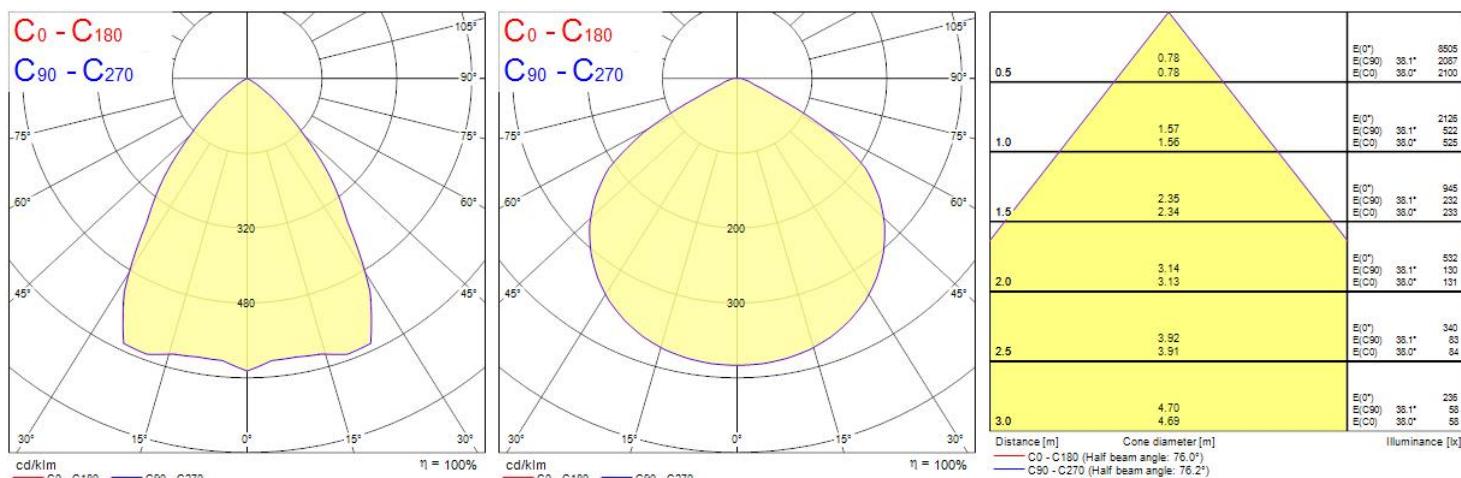


Concord

OPTIX LINEAR RECESSED 1200 4000K ALU EM 2023787

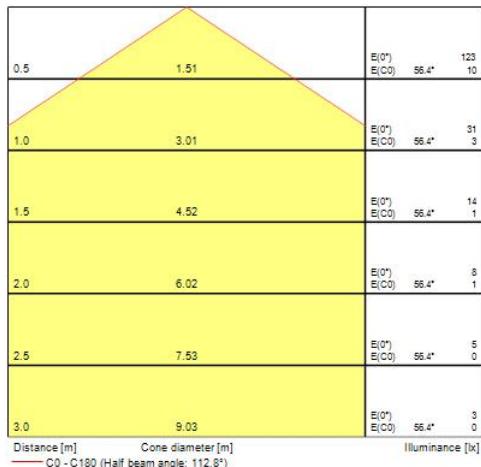

Technical drawings

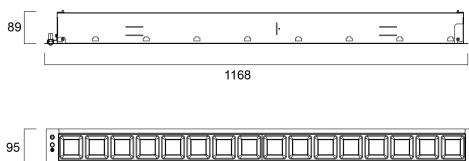

Data table

GENERAL DATA

Product name	OPTIX LINEAR RECESSED 1200 4000K ALU EM
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
General application	Education, Office
Operating temperature range (°C)	10°C...+25°C
Performance ambient temperature Tq (°C)	25

Concord

OPTIX LINEAR RECESSED 1200 4000K ALU EM 2023787

ETIM Class	EC002892
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	3400
Luminaire efficacy (lm/W)	128
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	80
Emergency duration (h)	3

ELECTRICAL DATA

Total power consumption (W)	26.5
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) \leq xx.x %	8
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	500
Inrush Current (A)	25
Inrush Duration (μ s)	250
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz

Concord

OPTIX LINEAR RECESSED 1200 4000K ALU EM

2023787

LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	20
Max. products per 13A C Breaker	30
Max. products per 16A C Breaker	40
Max. products per 20A C Breaker	47
Max. products per 10A B Breaker	10
Max. products per 13A B Breaker	15
Max. products per 16A B Breaker	20
Max. products per 20A B Breaker	24
Connectable conductor cross section - Min (mm ²)	2.5
Connectable conductor cross section - Max (mm ²)	2.5

LIFETIME DATA

Lifespan L70 B50	120000
Lifespan L80 B20	107500
Lifespan L90 B10	48500

PHYSICAL DATA

Housing colour	RAL9016
IP rating	IP20
IK rating	IK07
Diffuser finish	Matt/satinized
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1169
Nominal Product Width (mm)	95
Nominal Product Height (mm)	90
Weight (kg)	3.15

PACKAGING

Product EAN number	5025768237876
Packaging single length / height (cm)	119.0
Packaging single width (cm)	10.0

Concord

OPTIX LINEAR RECESSED 1200 4000K ALU EM

2023787

Packaging single depth (cm)	11.0
DUN14 (inner)	05025768237876
Units per outer package	1
Packaging outer length / height (cm)	119.0
Packaging outer width (cm)	10.0
Packaging outer depth (cm)	11.0

SAFETY DATA

Glow Wire Test (°C)	850
Optimal operating condition (°C)	10-25
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No