


Walraven starQuick® Clamp - M6 (Grey)

(C0515)

for securing conduits and pipes to walls, floors, or ceilings

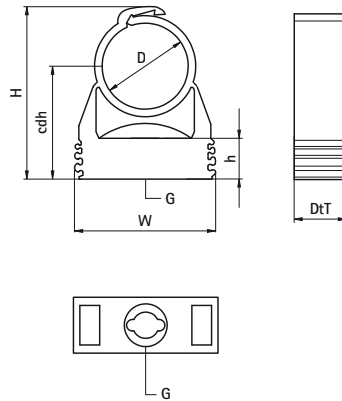

Features & benefits

- one-part clamp
- clamp closes by applying pressure to the pipe
- for outdoor use and installations in swimming pool environments, chemical factories, zinc factories, etc.
- due to a patented profile it is possible to tack several clamps to each other
- with pre-assembled connection nut M6
- material: modified PA6 (polyamide), grey (according to RAL 7035)
- resistant to UV, ageing, oil and petrol
- no corrosion, recyclable, halogen free
- temperature resistance from approx. -40 °C to approx. +90 °C (constant); short to approx. +130 °C

kiwa



Product Number	Outside Pipe Diameter	Total Width x Total Height x Total Depth	Clamp Center Distance Height	Height	Connection Thread	Maximum Allowed Load F _{0,z}	Breaking Load F _{b,z}
Reference letter	D	W x H x DtT	cdh	h	G	F _{0,z}	F _{b,z}
Unit description	mm	mm x mm x mm	mm	mm		N	N
0854612	12 - 14	29 x 40 x 17	25	10.6	M6	180	550
0854615	14 - 16	29 x 40 x 17	25	10.6	M6	200	600
0854618	16 - 20	29 x 44 x 17	27	10.6	M6	230	700
0854622	20 - 23	29 x 48 x 17	28	10.6	M6	270	800
0854628	24 - 28	40 x 50 x 18	32	10.6	M6	280	850
0854631	28 - 32	40 x 61 x 17	36	10.6	M6	300	900
0854635	32 - 35	43 x 65 x 17	37	10.6	M6	330	1,000
0854638	35 - 40	47 x 74 x 17	44	12.1	M6	330	1,000
0854642	40 - 44	52 x 78 x 17	44	12.1	M6	330	1,000
0854654	48 - 55	63 x 91 x 17	50	12.1	M6	330	1,000