

## Data Sheet | Item Number: 713-1418/107-000


THT male header, 2-row; 0.8 x 0.8 mm solder pin; straight; 100% protected against mismatching; Threaded flange; Pin spacing 3.5 mm; 36-pole; black

<https://www.wago.com/713-1418/107-000>



Color: ■ black

Similar to illustration

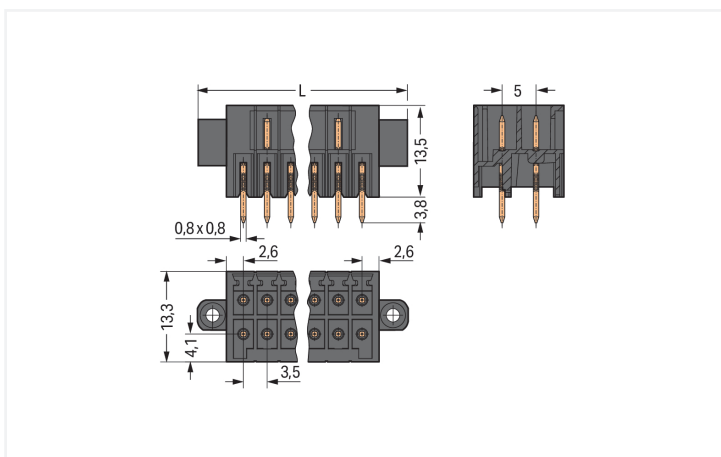

Dimensions in mm

$L = [(pole\ no./2) - 1] \times pin\ spacing + 13.6\ mm$



Male connector, 713 Series, solder pin dimensions 0.8 x 0.8 mm

Convenient electrical installations are guaranteed with this male connector (item number 713-1418/107-000). The item's dimensions are (73.1 x 17.3 x 13.3) mm (width x height x depth).

The contact surface is coated with tin. THT is used to assemble the pcb connector.

## Notes

## Safety Information

The MCS – MULTI CONNECTION SYSTEM includes connectors without breaking capacity in accordance with DIN EN 61984. When used as intended, these connectors must not be connected/disconnected when live or under load. When used as intended, these connectors must not be connected/disconnected when live or under load. The circuit design should ensure header pins, which can be touched, are not live when unmated.

## Variants:

Other pole numbers  
Other solder pin lengths  
Gold-plated or partially gold-plated contact surfaces  
Other versions (or variants) can be requested from WAGO Sales or configured at <https://configurator.wago.com/>.

## Electrical data

Ratings per	IEC/EN 60664-1			Approvals per	UL 1059		
Overvoltage category	III	III	II	Use group	B	C	D
Pollution degree	3	2	2	Rated voltage	150 V	50 V	-
Nominal voltage	80 V	160 V	250 V	Rated current	10 A	10 A	-
Rated impulse withstand voltage	2.5 kV	2.5 kV	2.5 kV				
Rated current	10 A	10 A	10 A				

Approvals per	CSA		
Use group	B	C	D
Rated voltage	150 V	-	-
Rated current	12 A	-	-

## Connection Data

Total number of potentials	36	<b>Connection 1</b>	
Number of connection types	1	Pole number	36
Number of levels	2		

## Physical data

Pin spacing	3.5 mm / 0.138 inches
Width	73.1 mm / 2.878 inches
Height	17.3 mm / 0.681 inches
Height from the surface	13.5 mm / 0.531 inches
Depth	13.3 mm / 0.524 inches
Solder pin length	3.8 mm
Solder pin dimensions	0.8 x 0.8 mm
Drilled hole diameter with tolerance	1.2 <sup>(+0.1)</sup> mm

## Mechanical data

Variable coding	Yes
Anti-rotation protection	Yes

### Plug-in connection

Contact type (pluggable connector)	Male connector/plug
Connector (connection type)	for PCB
Mismating protection	Yes
Mating direction to the PCB	90 °
Locking of plug-in connection	Threaded flange

### PCB contact

PCB contact	THT
Solder pin arrangement	over the entire male connector (in-line)
Number of solder pins per potential	1

### Material data

Note (material data)	<a href="#">Information on material specifications can be found here</a>
Color	black
Material group	I
Insulation material (main housing)	Polyphthalamide (PPA GF)
Flammability class per UL94	V0
Contact material	Electrolytic copper (E <sub>Cu</sub> )
Contact Plating	Tin
Fire load	0.193 MJ
Weight	9.7 g

### Environmental requirements

Limit temperature range	-60 ... +100 °C
Processing temperature	-35 ... +60 °C

### Commercial data

Product Group	3 (Multi Conn. System)
PU (SPU)	10 pcs
Packaging type	Box
Country of origin	PL
GTIN	4045454809096
Customs tariff number	85366930000

### Product Classification

UNSPSC	39121409
eCl@ss 10.0	27-44-04-02
eCl@ss 9.0	27-44-04-02
ETIM 9.0	EC002637
ETIM 10.0	EC002637
ECCN	NO US CLASSIFICATION

## Environmental Product Compliance

RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	29240e43-a1d8-4eca-8b59-c4591af1f44a
SCIP notification number (Belgium)	19cd7c8c-babc-4fae-8670-81f6dbf1d8cf
SCIP notification number (Bulgaria)	64ae01aa-4ce7-4f84-bdb6-1eb2dd049f93
SCIP notification number (Czech Republic)	40a12da6-926c-48e4-b883-0c07e51db0b8
SCIP notification number (Denmark)	f5d0cb14-7859-47e9-8edf-565806846f8f
SCIP notification number (Finland)	9ac34ff5-0574-4f6d-b200-79702c81bb5a
SCIP notification number (France)	92204cf0-3943-4333-8ec5-f970b8bf9ec9
SCIP notification number (Germany)	e9931213-f344-412b-aa60-7ca499cccaae
SCIP notification number (Hungary)	3c8db7ce-6028-407a-8a67-40a9dcc79442
SCIP notification number (Italy)	311ae5cf-deab-422a-b4e4-691d45a71151
SCIP notification number (Netherlands)	bade2edf-f64f-4d63-8c86-d4f2ece2c09c
SCIP notification number (Poland)	2690c525-97cd-471e-b9f1-24840196c52f
SCIP notification number (Romania)	3871055f-8d27-461e-a700-6b53b559914c
SCIP notification number (Sweden)	7229578b-1bf6-48b5-b75b-b97b027a02cd

## Approvals / Certificates

### General approvals



Approval	Standard	Certificate Name
CB DEKRA Certification B.V.	IEC 61984	NL-102427
CSA CSA Group	C22.2	2315087
KEMA/KEUR DEKRA Certification B.V.	EN 61984	71-126089

## Downloads

### Environmental Product Compliance

#### Compliance Search

Environmental Product Compliance 713-1418/107-000	↓
--	---


## Documentation

### Additional Information


Technical Section	03.04.2019	pdf 2027.26 KB	↓
-------------------	------------	-------------------	---

CAD/CAE-Data


**CAD data**


2D/3D Models  
713-1418/107-000 

**CAE data**

ZUKEN Portal  
713-1418/107-000 

**PCB Design**

Symbol and Footprint  
via SamacSys  
713-1418/107-000 

Symbol and Footprint  
via Ultra Librarian  
713-1418/107-000 

1 Compatible Products

1.1 System counterpart

1.1.1 Female connector/socket



**Item No.: 713-1118/107-000**  
1-conductor female connector, 2-row; CAGE CLAMP®; 1.5 mm<sup>2</sup>; Pin spacing 3.5 mm; 36-pole; 100% protected against mismatching; Screw flange; black

**Item No.: 713-1118/107-047**  
1-conductor female connector, 2-row; CAGE CLAMP®; 1.5 mm<sup>2</sup>; Pin spacing 3.5 mm; 36-pole; 100% protected against mismatching; Screw flange; direct marking; black

**Item No.: 713-1118/107-9037**  
1-conductor female connector, 2-row; CAGE CLAMP®; 1.5 mm<sup>2</sup>; Pin spacing 3.5 mm; 36-pole; 100% protected against mismatching; Screw flange; direct marking; black

**Item No.: 713-1118/107-047/035-000**  
1-conductor female connector, 2-row; CAGE CLAMP®; 1.5 mm<sup>2</sup>; Pin spacing 3.5 mm; 36-pole; 100% protected against mismatching; Screw flange; Strain relief plate; direct marking; black



**Item No.: 713-1118/107-9037/035-000**  
1-conductor female connector, 2-row; CAGE CLAMP®; 1.5 mm<sup>2</sup>; Pin spacing 3.5 mm; 36-pole; 100% protected against mismatching; Screw flange; Strain relief plate; direct marking; black

1.2 Optional Accessories

1.2.1 Coding


1.2.1.1 Coding



**Item No.: 714-101**  
Coding key; orange

Installation Notes

Coding



Coding a male header by inserting a coding pin.

Subject to changes. Please also observe the further product documentation!

---

Current addresses can be found at: [www.wago.com](http://www.wago.com)