



Features

- START Highbay, includes 1 m cables, black aluminium housing, 19,500 Lm, 150 W, 130 Lm/W, 4000 K, drive current: 3210 mA, CRI 80, 90° beam angle, 1-10 V dimmable, IP65, IK08, 54,000 hrs (L80/B50), (D x H) 296 x 177 mm, 1 m mains cable, 1 m control cable, 1.2 m chain lenght including hooks


Product Overview

|                                 |                                         |
|---------------------------------|-----------------------------------------|
| Product name                    | START Highbay IP65 1-10V 19000lm 840 WB |
| Technology                      | LED                                     |
| Housing                         | Aluminium                               |
| Mount                           | Suspended                               |
| Fixture rating                  | Enclosed                                |
| E-number FI                     | 4306961                                 |
| E-number SE                     | 7214415                                 |
| Fixture luminous flux (lm)      | 19500                                   |
| Luminaire efficacy (lm/W)       | 130                                     |
| Colour temperature (K)          | 4000                                    |
| Light colour                    | Neutral White                           |
| CRI (Ra)                        | 80                                      |
| Colour Variation Initial (SDCM) | 6                                       |
| Glare control                   | < 25                                    |
| Photobiological Risk Group      | RG1                                     |
| Total power consumption (W)     | 150                                     |
| Electrical protection           | Class I                                 |
| Control gear type               | LED driver constant current             |
| LED Flickering Rate             | Ultra low (5% or less)                  |
| Housing colour                  | Black                                   |

## START Highbay IP65 1-10V 19000lm 840 WB 0039348

|                    |               |
|--------------------|---------------|
| IP rating          | IP65          |
| IK rating          | IK08          |
| Product EAN number | 5410288393483 |
| Warranty           | 5 years       |

### Photometry

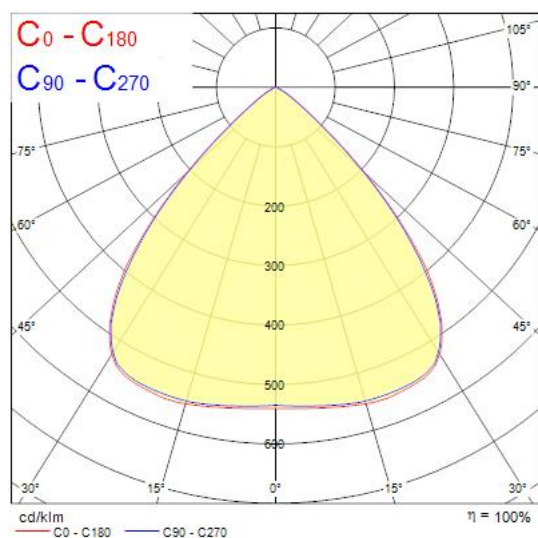

### Technical drawings

