



PHOTOMETRIC LIGHT REPORT

Refl downl eco | Ø192mm | white | 5-CCT | 360mA | no driver

Article number: 136-503



Go to the
webshop
of Tronix
Lighting



TRONIX



136-503 Refl downl eco | Ø192mm | white | 5-CCT | 360mA | no driver

Introduction

Purpose of this Document

This document provides accurate and objective photometric data for Tronix Lighting item 136-503. All information is based on actual measurements taken from standard production units. No modifications were made to enhance performance results. In some cases, minor adjustments—such as temporary removal of covers, cables, or mounting features—were necessary for testing purposes. These did not influence product performance.

Test Methodology

Testing was conducted using randomly selected, unopened samples from regular inventory. All tests comply with the LM-79-19 standard, the recognized method for photometric and electrical measurements of LED and OLED luminaires. This standard, an update of IES LM-79-2008, outlines environmental test conditions, stabilization procedures, measurement methods, and approved instruments. It uses absolute photometry, meaning results directly reflect the performance of the tested product, without comparison to rated lamp standards.

Product 136-503 was tested using:

- A photogoniometer to measure luminous intensity distribution at various angles
- An integrating sphere to determine total luminous flux and colour characteristics

Compliance & Certification

Item 136-503 meets the requirements of the following EU directives. Tronix Lighting certifies that all relevant tests were executed in accordance with the applicable standards, and the CE mark is applied accordingly:

- General Product Safety – Directive 2023/988/EC
- Low Voltage Directive (LVD) – Directive 2014/35/EU
- Electromagnetic Compatibility (EMC) – Directive 2004/108/EC
- Ecodesign – Directive 2009/125/EC
- RoHS 3 – Directive 2011/65/EU + Amendment 2015/863/EU

Recycling & Sustainability

Tronix Lighting is affiliated with national recycling systems for electrical and electronic waste. The luminaire is over 90% recyclable when disposed of as electronic waste at end of life. In addition, Tronix Lighting participates in national packaging recycling schemes, ensuring full compliance with both the WEEE and packaging directives.

136-503 Refl downl eco | Ø192mm | white | 5-CCT | 360mA | no driver

Laboratory and equipment

Laboratory owner and location	Tronix Lighting BV. Uden. The Netherlands
Gonio spectrometer system and type	Viso Systems Type C. horizontal
Spectrometer manufacturer and model	(Gonio) Ocean Optics STS VIS (Sphere) Admesy HERA VIS 380–780nm
Flicker meter manufacturer and model	Viso Systems LabFlicker
Oscilloscope manufacturer and model	Tektronix MDO3024 oscilloscope (4 Channels. 200 MHz)
Power meter manufacturer and model	Vitretek PA900 Precision Multi-Channel Harmonic Power Analyzer
Power source manufacturer and model	(DC) Keithley Source Measure Unit SMU-2420 3A DC Source Meter (AC) Chroma 61601 AC Source
Datalogger Manufacturer and Model	Omega 8-Channel Thermocouple Thermometer/Data Logger

Measurement conditions gonio spectrometer

Number of C-planes and Resolution	2 planes – 180°
γ (gamma)-Resolution	1°
Test Distance	1.81 m
Room Temperature and Humidity	22°C +/- 10% – RH 50% +/- 20%
Input Power. Power and Displacement Factors	12.2 W – PF 1.0 – DPF 0.98
Frequency of Input Power	0 Hz
Warm-up Time and Variation	Lamp stabilized in 15 min 0 sec --1.2%

Tested light source

Manufacturer and Order Code	Tronix Lighting – 136-503
Product Description	Refl downl eco Ø192mm white 5-CCT 360mA no driver

Main Light Measurement Results

Output – Total Lumen (Up% / Down%)	1567 lm – 0% / 100%
Efficiency	128 lm/W
Energy efficiency class	E
Peak Intensity and Beam Angle	1556 cd – 61.5°
Correlated Colour Temperature	CCT = 3360 K
Colour Shift. CIE duv	Duv -0.0069
Colour Rendering Index	CRI 86.5
Colour Rendering TM30-18	R _f 85.3 – R _g 98.9
Television Lighting Consistency Index	TLCI = 73
Flicker	SVM n/a – PstLM n/a

136-503 Refl downl eco | Ø192mm | white | 5-CCT | 360mA | no driver

Electrical measurement details

Input Power


RMS Input voltage feed. V_{RMS} 34.0 V
 RMS Input current feed. I_{RMS} 0.360 A
 Total input power 12.2 W

Frequency of input power 0 Hz
 Power factor 1.0
 Displacement power factor 0.98

Total harmonic distortion of the current 0%
 Total harmonic distortion of the voltage 0%


Input Power Curve

Voltage - Current



Efficiency

Radiated power efficiency: 38.4%




Lumen efficiency: 128 lm/W



Harmonics

3rd Harmonic n/a
 5th Harmonic n/a
 7th Harmonic n/a
 9th Harmonic n/a
 11th Harmonic n/a

Current Harmonics %

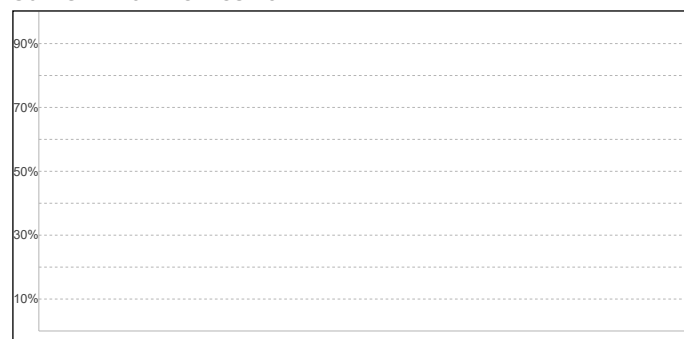

Stabilization Details

Warm-up Conditions

Stable period 15 min
 Stable change max 2.0%
 Minimum warm-up time 15 min

Colour temperature change during warm-up

15 min CCT start 3366 K
 2.0% CCT shift -6 K
 15 min CCT end 3360 K

Warm-up Results

Total warmup time Lamp stabilized in 15 min 0 sec
 Warmup variation -1.2%

Output intensity change during warm-up

Output start 1584 lm
 Output change -17 lm
 Output end 1567 lm


136-503 Refl downl eco | Ø192mm | white | 5-CCT | 360mA | no driver

Colour measurement details


Total lumen output 1567 lm
 Correlated Colour Temperature 3360 K
 Colour coordinates CIE 1931 (x;y) = (0.406;0.376)
 Colour deviation from BBL Duv = -0.0069

TM30-18 Colour Fidelity Index R_f 85.3
 TM30-18 Colour Gamut Index R_g 98.9
 Colour Rendering Index (Ra) CRI 86.5
 Colour Rendering Index. (red component) $R_9 = 28.0$


Colour Quality Scale CQS = 83.3
 Television Lighting Consistency Index TLCI = 73

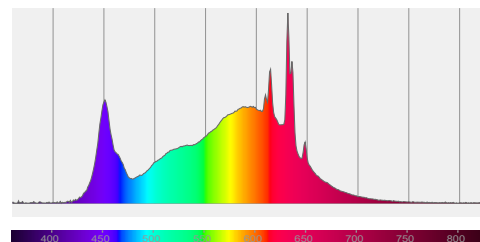

Relative spectral power distribution

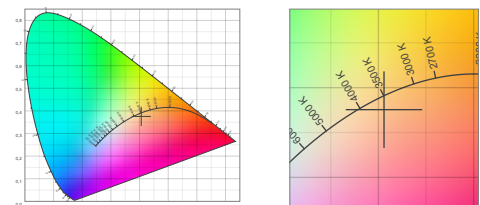

TM30 details

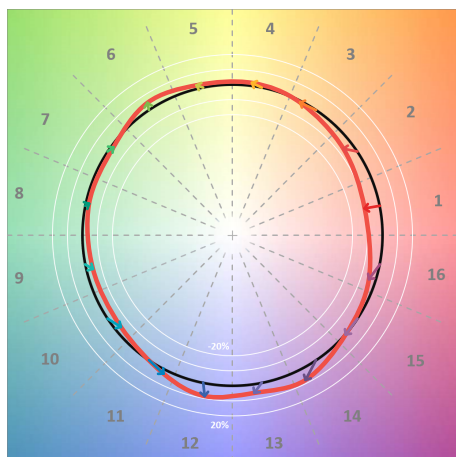


TM30 Colour vectors per hue bin




TM30 Colour distortion


Hue Bin	R_f	Shifts (%)	
		Chroma	Hue
C1	83	-10%	0%
C2	83	-7%	7%
C3	78	-2%	12%
C4	88	2%	7%
C5	91	2%	4%
C6	91	5%	-2%
C7	91	-2%	-4%
C8	93	-2%	-2%
C9	90	-5%	4%
C10	83	-4%	10%
C11	79	2%	13%
C12	85	9%	3%
C13	88	6%	-6%
C14	81	7%	-13%
C15	82	-1%	-13%
C16	80	-5%	-11%

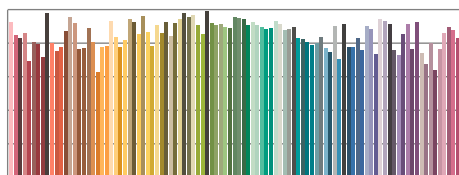

TM30-18 R_f -values per reference colour

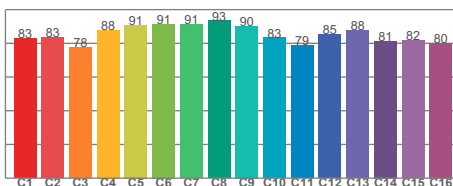


TM30-18 R_f -values per hue bin

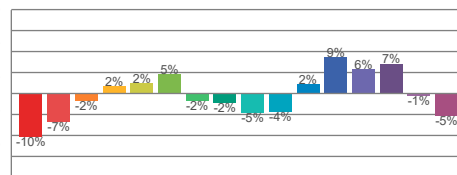


TM30 Chroma shift

Colour Quality details

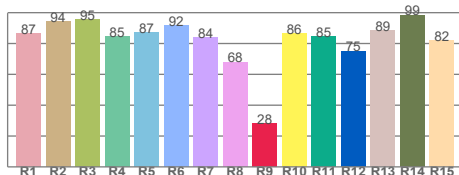

Colour Rendering Index

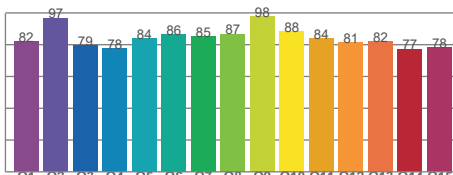

Colour Quality Scale

136-503 Refl downl eco | Ø192mm | white | 5-CCT | 360mA | no driver

Flicker / temporal light artefacts details

Measurement conditions

Flicker meter type	Viso Systems LabFlicker
Flicker/TLA sample rate	n/a samples/s
Measurement time	5x 180 seconds (15 minutes) for PstLM. 1.2 sec for all other indices

Flicker indices according to Illuminating Engineering Society (IES)


Flicker frequency	n/a Hz
Percent flicker	n/a %
Flicker index	n/a

TLA indices (according IEC TR 61547-1, EN 61000-3-3 and EN 61000-4-15)


An LED luminaire is considered flicker-free if the SVM value is ≤ 0.4 and if the PstLM value is ≤ 1.0

PstLM value ($F < 80$ Hz)	n/a
SVM value ($80 < F < 2000$ Hz)	n/a


Flicker frame (one flicker period in time domain)

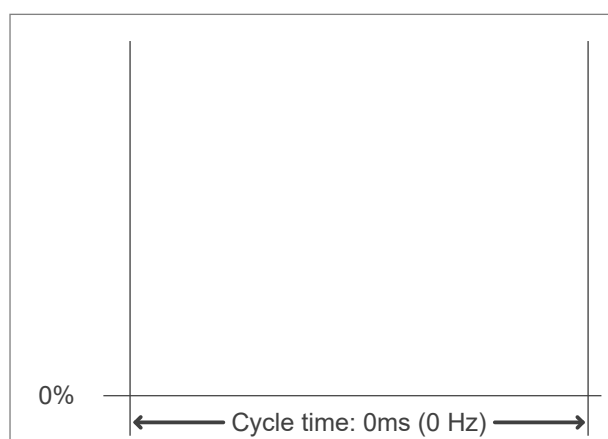

Flicker FFT (flicker curve in frequency domain)

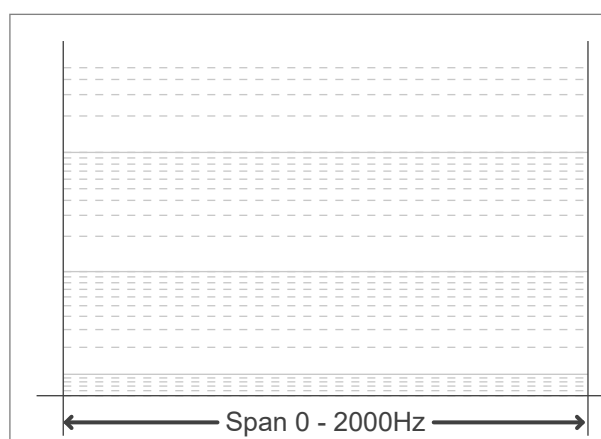

IEEE 1789-2015 Lighting Flicker Risk Zones

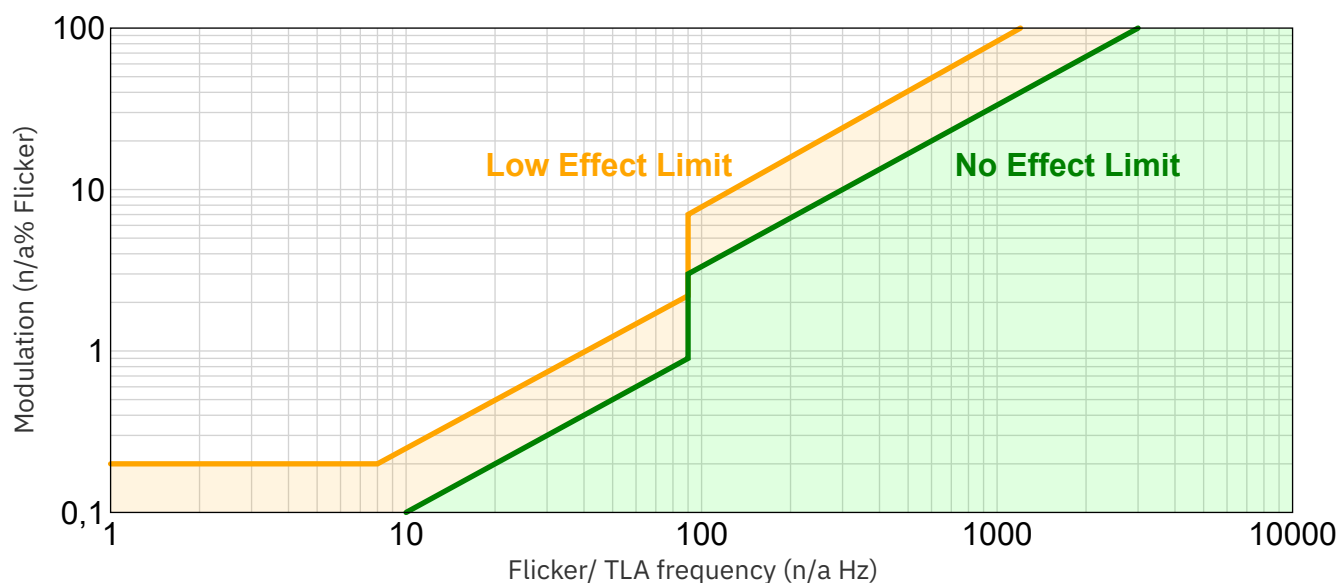


Document revision date: 10-6-2025 Measurement serial: VFR-250120-0413-MS

136-503 Refl downl eco | Ø192mm | white | 5-CCT | 360mA | no driver

Beam angle

Luminous Intensity diagram

Unit: 0-100% of peak intensity

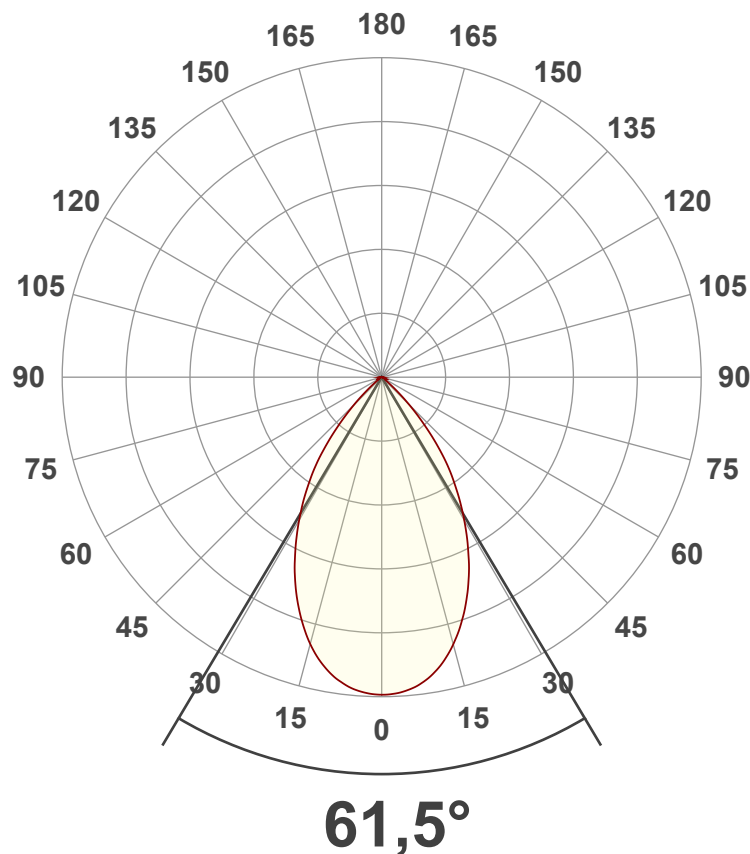

Main Values

Output (total Lumen)	1567 lm
Lumen Up/Down	0% / 100%
Peak Intensity	1556 cd
Beam Angle (50%)	61.5°
Beam Angle (90%)	61.5°
Beam Angle (10%)	61.5°

Cut-off Angle

Average 2.5%	102.4°
--------------	--------

Field Angle

Average 10%	92.2°
-------------	-------


Intensity Ratio

In 120° cone	97.9%
In 90° cone	93.5%

C planes

C000-C180
C090-C270


Linear distribution diagram - Intensity (candela) vs γ-angle

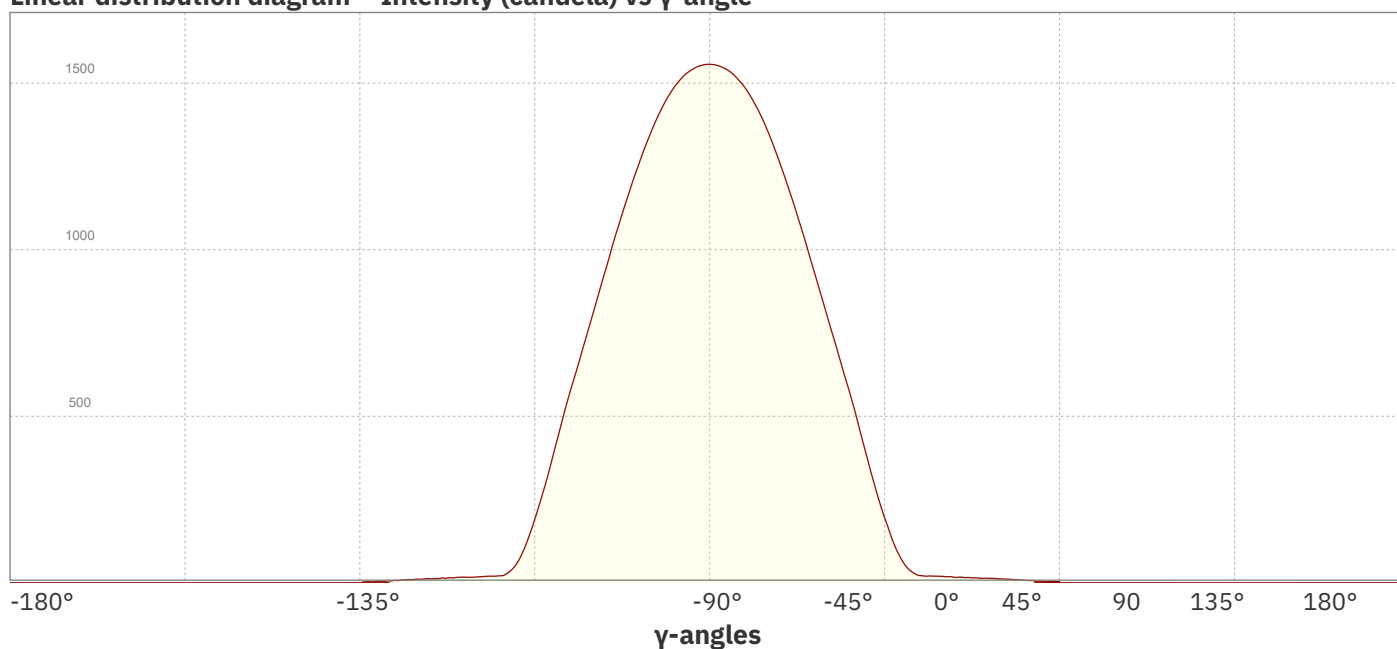

Document revision date: 10-6-2025 Measurement serial: VFR-250120-0413-MS

136-503 Refl downl eco | Ø192mm | white | 5-CCT | 360mA | no driver

Beam Details

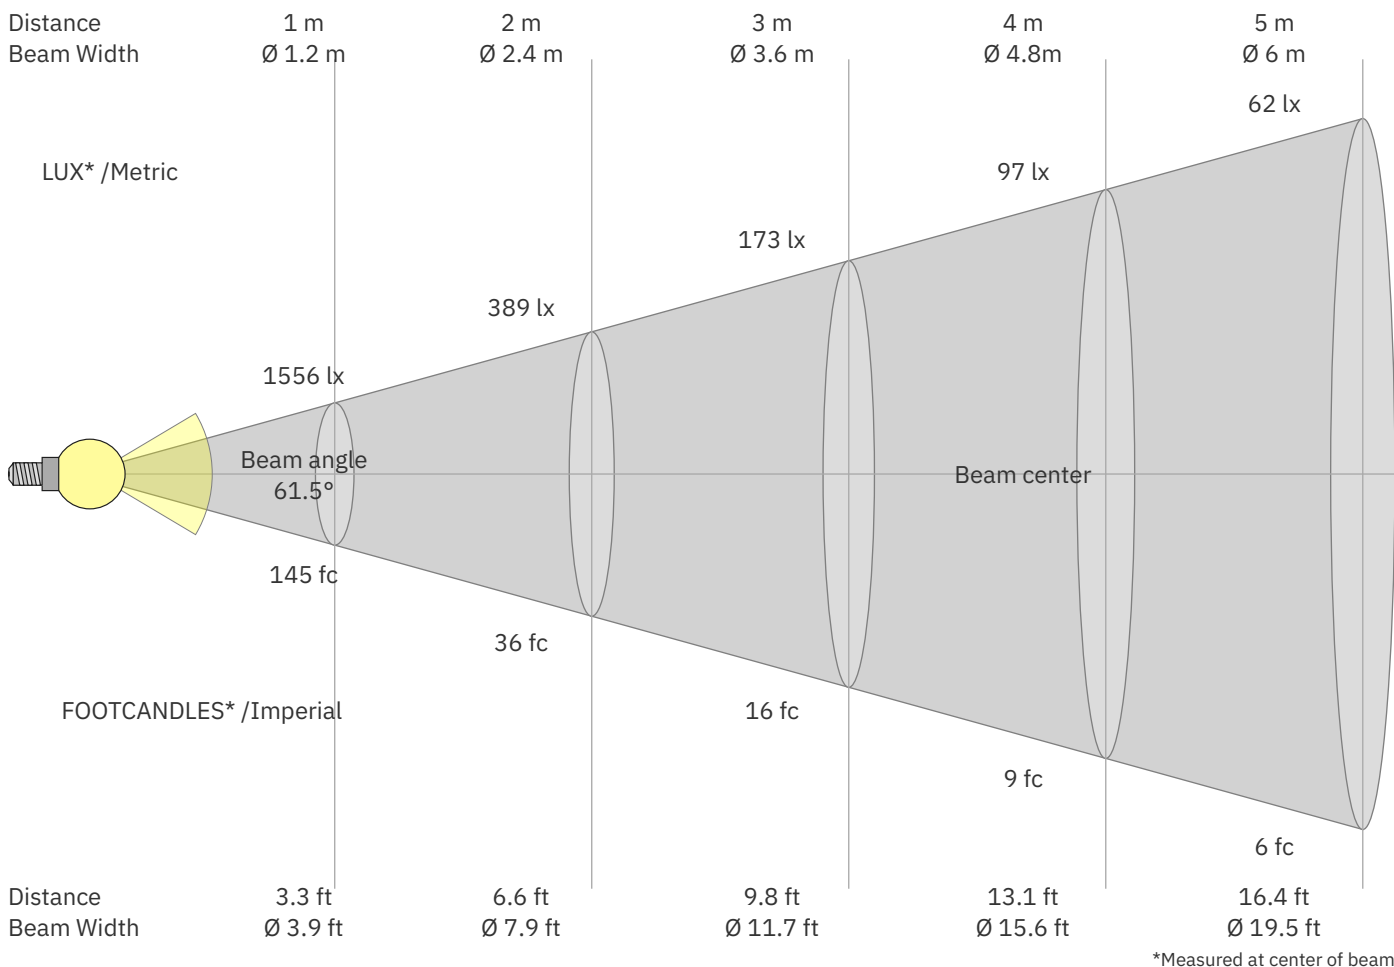

Beam intensities from 1 – 20 m

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	m
3.3	6.6	9.8	13.1	16.4	19.7	23	26.2	29.5	32.8	36.1	39.4	42.7	45.9	49.2	52.5	55.8	59.1	62.3	65.6	ft
1556	389	173	97	62	43	32	24	19	16	13	11	9	8	7	6	5	5	4	4	lux
144.6	36.1	16.1	9	5.8	4	3	2.3	1.8	1.4	1.2	1	0.9	0.7	0.6	0.6	0.5	0.4	0.4	0.4	fc

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
1556	1553	1544	1529	1505	1472	1432	1383	1327	1264	1198	1126	1051	971	891	809	729	648	570	484	cd
100%	100%	99%	98%	97%	95%	92%	89%	85%	81%	77%	72%	68%	62%	57%	52%	47%	42%	37%	31%	of 0°val

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
1556	1553	1544	1529	1505	1472	1432	1383	1327	1264	1198	1126	1051	971	891	809	729	648	570	484	cd
100%	100%	99%	98%	97%	95%	92%	89%	85%	81%	77%	72%	68%	62%	57%	52%	47%	42%	37%	31%	of 0°val

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
1556	1553	1543	1527	1502	1470	1429	1381	1325	1261	1194	1123	1048	969	889	809	731	650	571	486	cd
100%	100%	99%	98%	96%	94%	92%	89%	85%	81%	77%	72%	67%	62%	57%	52%	47%	42%	37%	31%	of 0°val

Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
1556	1553	1543	1527	1502	1470	1429	1381	1325	1261	1194	1123	1048	969	889	809	731	650	571	486	cd
100%	100%	99%	98%	96%	94%	92%	89%	85%	81%	77%	72%	67%	62%	57%	52%	47%	42%	37%	31%	of 0°val

Light Planning – UGR table

Reflectances											
ρ Ceiling		70	70	50	50	30	70	70	50	50	30
ρ Walls		50	30	50	30	30	50	30	50	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20
Room size											
H = mounting height above eye level											
X	Y	Viewed Crosswise					Viewed Endwise				
		(Viewing direction orthogonal to lamp length axis)					(Viewing direction parallel to lamp length axis)				
	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
Variations with the observer position for the luminaire spacings. S:											
	n/a	n/a			n/a						
	n/a	n/a			n/a						
	n/a	n/a			n/a						

Ceiling reflectance	80			70			50			30			10			0		
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumen delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	97	95	94	92
2	107	102	97	94	105	100	96	93	97	93	90	94	91	89	91	89	87	85
3	101	94	89	84	99	93	88	84	90	86	82	88	84	81	85	82	80	78
4	95	87	81	77	94	86	81	76	84	79	76	82	78	75	80	77	74	72
5	90	81	75	70	89	80	75	70	79	73	69	77	72	69	75	71	68	67
6	85	76	69	65	84	75	69	65	73	68	64	72	67	64	71	67	63	62
7	81	71	65	60	79	70	64	60	69	64	60	68	63	59	67	62	59	57
8	77	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53
9	73	62	56	52	72	62	56	52	61	56	52	60	55	52	59	55	51	50
10	69	59	53	49	68	58	53	49	58	52	48	57	52	48	56	51	48	47