

Technical data sheet

Base, Multibase + NPE with remote signalling

Item number: 5096651




- Suitable for V 25-B+C, V 20-C and V10-C
- Pre-mounted and ready for connection
- Multifunction terminals for easy connection to series-mounted devices
- Upper parts can be rotated through 180 degrees
- With remote signalling, potential-free NO contact, for function monitoring
- 3+1 protection circuit for TN-S and TT network systems



Master data

Item number	5096651
Type	MB 1+NPE+FS
Description 1	Multibase
Description 2	1-pole + NPE w. signal contact
Manufacturer	OBO
Dimension	1+NPE+FS
Smallest sales unit	1
Unit of quantity	Units
Weight	11,6 kg
Weight unit	kg/100 pairs
CO2 Footprint (GWP) Cradle-to-Gate	0,6709 kg CO2e / 1 Piece

Dimensions

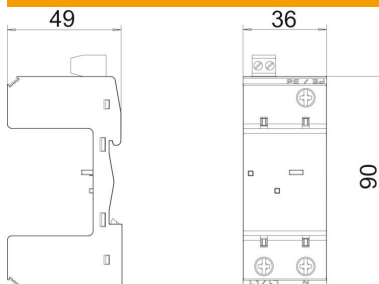

Technical data sheet

Base, Multibase + NPE with remote signalling

Item number: 5096651



Technical specifications

Pole version	1+N/PE
Structural width in division units (division unit, 17.5 mm)	2
Operating temperature, max.	80 °C
Operating temperature, min.	-40 °C
Remote signalling	yes
Conductor cross-section, rigid (single-wire/multiwire), max.	35 mm ²
Conductor cross-section, rigid (single-wire/multiwire), min.	2,5 mm ²
Installation type	DIN rail 35 mm
Network form	Miscellaneous
Protection rating	IP20
Permitted temperature range, max.	80 °C
Permitted temperature range, min.	-40 °C