


Walraven KSB2 Clamp (M8/M10)

(A05116)

for steel, copper, cast iron and plastic (multilayer) pipe

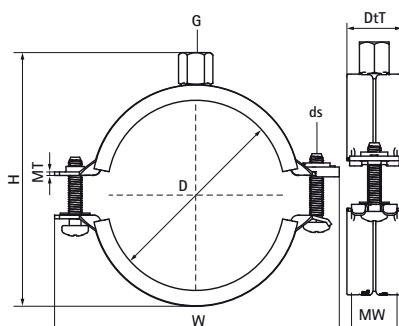

Features & benefits

- two-screw clamp
- quick closing mechanism for easy locking of the clamp with one hand
- full range from 10 to 225 mm
- material: steel
- zinc plated
- temperature resistance from -30 °C to +120 °C
- sound insulating lining according DIN 4109
- noise reduction according to ISO 3822-1 up to 23 dB(A)



EPD

Product Number	Outside Pipe Diameter	DN	Pipe Diameter Imperial	Connection Thread	Total Width x Total Height x Total Depth	Material Width x Material Thickness	Screw Size	Approvals	Maximum Allowed Load Faz
Reference letter	D	D	D	G	W x H x DtT	MW x MT	ds		F _{0,z}
Unit description	mm		"		mm x mm x mm	mm x mm			N
3396014	10 - 14	DN 8	1/4	M8/M10	59 x 42 x 25	20 x 1.25	M6	CE ETA RAL-GZ 655/B ITB (KOT) EPD	495
3396019	15 - 19	DN 10	3/8	M8/M10	63 x 46 x 25	20 x 1.25	M6	CE ETA RAL-GZ 655/B ITB (KOT) EPD	495
3396023	20 - 23	DN 15	1/2	M8/M10	68 x 51 x 25	20 x 1.25	M6	CE ETA RAL-GZ 655/B ITB (KOT) EPD	495
3396028	25 - 28	DN 20	3/4	M8/M10	74 x 57 x 25	20 x 1.25	M6	CE ETA RAL-GZ 655/B ITB (KOT) EPD	495
3396035	31 - 35	DN 25	1	M8/M10	80 x 63 x 25	20 x 1.25	M6	CE ETA RAL-GZ 655/B ITB (KOT) EPD	495
3396039	36 - 39	-	-	M8/M10	84 x 67 x 25	20 x 1.25	M6	CE ETA RAL-GZ 655/B ITB (KOT) EPD	495
3396045	40 - 45	DN 32	1 1/4	M8/M10	91 x 74 x 25	20 x 1.25	M6	CE ETA RAL-GZ 655/B ITB (KOT) EPD	495
3396052	48 - 52	DN 40	1 1/2	M8/M10	97 x 80 x 25	20 x 1.25	M6	CE ETA RAL-GZ 655/B ITB (KOT) EPD	495
3396058	54 - 58	-	-	M8/M10	104 x 87 x 25	20 x 1.25	M6	CE ETA RAL-GZ 655/B ITB (KOT) EPD	495
3396064	60 - 64	DN 50	2	M8/M10	109 x 92 x 25	20 x 1.25	M6	CE ETA RAL-GZ 655/B ITB (KOT) EPD	495
3396070	66 - 70	-	-	M8/M10	118 x 100 x 25	20 x 1.50	M6	CE ETA RAL-GZ 655/B ITB (KOT) EPD	560
3396079	75 - 79	DN 65	2 1/2	M8/M10	125 x 108 x 25	20 x 1.50	M6	CE ETA RAL-GZ 655/B ITB (KOT) EPD	560
3396083	80 - 83	-	-	M8/M10	132 x 114 x 25	20 x 1.50	M6	CE ETA RAL-GZ 655/B ITB (KOT) EPD	560
3396091	88 - 91	DN 80	3	M8/M10	142 x 123 x 28	23 x 2.00	M6	CE ETA RAL-GZ 655/B ITB (KOT) EPD	1,055
3396105	100 - 105	-	-	M8/M10	155 x 137 x 28	23 x 2.00	M6	CE ETA RAL-GZ 655/B ITB (KOT) EPD	1,055
3396115	108 - 115	DN 100	4	M8/M10	164 x 145 x 28	23 x 2.00	M6	CE ETA RAL-GZ 655/B ITB (KOT) EPD	1,055
3396130	125 - 130	-	-	M8/M10	181 x 162 x 28	23 x 2.00	M6	CE ETA RAL-GZ 655/B ITB (KOT) EPD	1,055
3396140	133 - 140	DN 125	5	M8/M10	189 x 171 x 28	23 x 2.00	M6	CE ETA RAL-GZ 655/B ITB (KOT) EPD	1,055
3396160	152 - 160	-	-	M8/M10	209 x 190 x 28	23 x 2.00	M6	CE ETA RAL-GZ 655/B ITB (KOT) EPD	1,055
3396169	165 - 169	DN 150	6	M8/M10	225 x 203 x 29	25 x 2.50	M8	CE ETA RAL-GZ 655/B ITB (KOT) EPD	2,250
3396180	176 - 180	-	-	M8/M10	238 x 216 x 29	25 x 2.50	M8	CE ETA RAL-GZ 655/B ITB (KOT) EPD	2,250
3396200	192 - 200	-	-	M8/M10	257 x 235 x 29	25 x 2.50	M8	CE ETA RAL-GZ 655/B ITB (KOT) EPD	2,250
3396210	205 - 210	-	-	M8/M10	269 x 247 x 29	25 x 2.50	M8	CE ETA RAL-GZ 655/B ITB (KOT) EPD	2,250
3396225	219 - 225	DN 200	8	M8/M10	283 x 261 x 29	25 x 2.50	M8	CE ETA RAL-GZ 655/B ITB (KOT) EPD	2,250