


# Walraven Heavy Duty Clamp HD1501 White (M10/12) (BUP1000)

(A10051)

for metal pipes

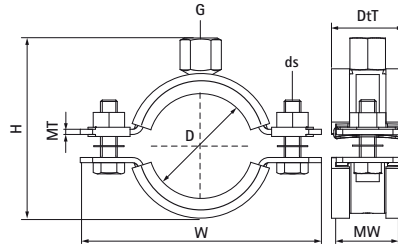

## Features & benefits

- two-part clamp with two locking bolts
- up to and including 5": locking nut is captive, hidden in plastic holder
- heavy design
- bolts secured with anti-loss washer
- with CO<sub>2</sub> welded connection nut
- material: steel
- surface protection:
- white (RAL 9003) epoxy powder coating (60 µm)
- product is part of the Walraven BIS UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- sound insulating according DIN 4109
- tested for fire safety



EPD

| Product Number   | Outside Pipe Diameter | DN     | Pipe Diameter Imperial | Connection Thread | Total Width x Total Height x Total Depth | Material Width x Material Thickness | Screw Size | Approvals                   | Maximum Allowed Load Faz |
|------------------|-----------------------|--------|------------------------|-------------------|------------------------------------------|-------------------------------------|------------|-----------------------------|--------------------------|
| Reference letter | D                     | D      | D                      | G                 | W x H x DtT                              | MW x MT                             | ds         |                             | F <sub>0,z</sub>         |
| Unit description | mm                    |        | "                      |                   | mm x mm x mm                             | mm x mm                             |            |                             | N                        |
| 33149071         | 65 - 71               | -      | -                      | M10/M12           | 137 x 115 x 30                           | 38 x 3.00                           | M8         | CE   ETA   ISO 3822-1   EPD | 2,300                    |
| 33149078         | 72 - 78               | DN 65  | 2½                     | M10/M12           | 144 x 122 x 30                           | 30 x 3.00                           | M8         | CE   ETA   ISO 3822-1   EPD | 2,300                    |
| 33149085         | 79 - 85               | -      | -                      | M10/M12           | 151 x 129 x 30                           | 30 x 3.00                           | M8         | CE   ETA   ISO 3822-1   EPD | 2,300                    |
| 33149092         | 86 - 92               | DN 80  | 3                      | M10/M12           | 158 x 136 x 30                           | 30 x 3.00                           | M8         | CE   ETA   ISO 3822-1   EPD | 2,300                    |
| 33149109         | 101 - 109             | -      | -                      | M10/M12           | 175 x 153 x 30                           | 30 x 3.00                           | M8         | CE   ETA   ISO 3822-1   EPD | 2,300                    |
| 33149116         | 108 - 116             | DN 100 | 4                      | M10/M12           | 182 x 160 x 30                           | 30 x 3.00                           | M8         | CE   ETA   ISO 3822-1   EPD | 2,300                    |
| 33149140         | 132 - 140             | DN 125 | 5                      | M10/M12           | 206 x 184 x 30                           | 30 x 3.00                           | M8         | CE   ETA   ISO 3822-1   EPD | 2,300                    |
| 33149169         | 159 - 169             | DN 150 | 6                      | M10/M12           | 255 x 220 x 40                           | 38 x 4.00                           | M10        | CE   ETA   ISO 3822-1   EPD | 3,800                    |