

### Features

- OPTICLIP R 1200 940 1L WHT MP is a high efficacy low glare ceiling recessed mounted luminaire with replaceable light engines for office and education applications. White colour plastic optic (reflector + lens), direct light distribution. Luminaire dimensions: 1195x295x17mm. White body colour (RAL9016), IP40 (from the front), IK07, 8-steps dip switch non-dimmable driver, 15.5-33W power consumption, (output options: 4250lm/33W, 4050lm/31W, 3700lm/28W, 3400lm/25.5W, 3100lm/23W, 2750lm/20.5W, 2450lm/18.5W and 2050lm/15.5W), 4000K (neutral white) CCT, 4250lm luminous flux at 900mA drive current level, 129lm/W system efficacy, CRI>90, SDCM≤3 (3-step MacAdam ellipse) LED Colour Consistency, UGR<19, luminance at 65° < 2000 cd/m<sup>2</sup>. Lifespan: 100,000 hours L80B20, photobiological safety risk group 0. Electrical protection Class II. Glow wire test 850°C.


### Product Overview

<b>Product name</b>	OPTICLIP R 1200 940 1L WHT MP
<b>Technology</b>	LED
<b>Cap/Base</b>	N/A
<b>Housing</b>	Steel
<b>Mount</b>	Ceiling recessed mounting
<b>General application</b>	Education, Office
<b>ETIM Class</b>	EC002892
<b>E-number FI</b>	4170638
<b>Fixture luminous flux (lm)</b>	4250
<b>Luminaire efficacy (lm/W)</b>	129
<b>Correlated colour temperature (k)</b>	4000
<b>Light colour</b>	Neutral White


## OPTICLIP R 1200 940 1L WHT MP 0034025

CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Beam Angle (°)	75
Glare control	< 19
Photobiological Risk Group	RG0
Total power consumption (W)	33
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9016
IP rating	IP40/20
IK rating	IK07
Product EAN number	5410288340258
Warranty	5 years
Dimming method	N/A

### Photometry

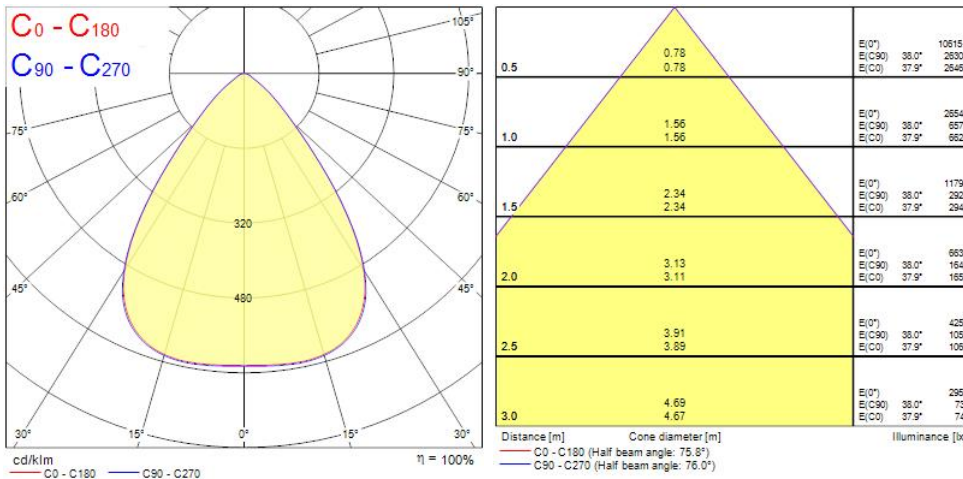

### Technical drawings

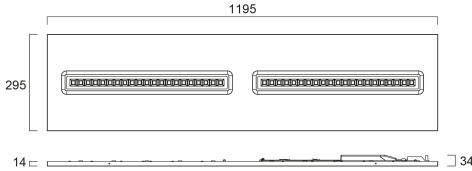

### Data table

#### GENERAL DATA

Product name	OPTICLIP R 1200 940 1L WHT MP
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
General application	Education, Office
Operating temperature range (°C)	5°C...+25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
E-number FI	4170638
Warranty	5 years

#### OPTICAL DATA

Fixture luminous flux (lm)	4250
Luminaire efficacy (lm/W)	129
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Beam Angle (°)	75

## OPTICLIP R 1200 940 1L WHT MP 0034025

Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG0

### ELECTRICAL DATA

Total power consumption (W)	33
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) $\leq$ xx.x %	15
Electrical protection	Class II
Control gear required	No
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	900
Inrush Current (A)	20
Inrush Duration ( $\mu$ s)	120
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	22
Max. products per 16A C Breaker	35
Max. products per 10A B Breaker	22
Max. products per 16A B Breaker	35
Connectable conductor cross section - Max (mm <sup>2</sup> )	1.5

### LIFETIME DATA

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B20	50000

### PHYSICAL DATA

Housing colour	RAL9016
IP rating	IP40/20
IK rating	IK07
Diffuser finish	Other
Diffuser material	None
Nominal Product Length (mm)	1195
Nominal Product Width (mm)	295
Nominal Product Height (mm)	14
Weight (kg)	2.8

### PACKAGING

Product EAN number	5410288340258
Packaging single length / height (cm)	120.0
Packaging single width (cm)	4.0
Packaging single depth (cm)	30.0
DUN14 (inner)	05410288340258
Units per outer package	1
Packaging outer length / height (cm)	120.0
Packaging outer width (cm)	4.0
Packaging outer depth (cm)	30.0

### SAFETY DATA

Glow Wire Test (°C)	650
Optimal operating condition (°C)	5-25
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No