



ENVIRONMENTAL PRODUCT DECLARATION

IN ACCORDANCE WITH EN 15804+A2 & ISO 14025

TownTune Central Post-Top DTC BDP262

Signify N.V.



EPD HUB, HUB-4981

Published on 22.01.2026, last updated on 22.01.2026, valid until 22.01.2031

MANUFACTURER AND SITE

Manufacturer	Signify N.V.
Address	High Tech Campus 48, 5656 AE Eindhoven, The Netherlands
Contact details	sustainability@signify.com
Website	https://www.signify.com/global
Place of production	VALLADOLID, SPAIN
Place(s) of raw material origin	EU, APAC
Place(s) of installation and use	EU
Period for data	Calendar Year 2023

EPD STANDARDS, SCOPE AND VERIFICATION

Program operator	EPD Hub, hub@epdhub.com
Reference standard	EN 15804:2012+A2:2019/AC:2021 and ISO 14025
PCR	EPD Hub Core PCR version 1.2, 24 Mar 2025
Sector	Electrical product
Category of EPD	Third party verified EPD
Scope of the EPD	Cradle to gate with options, A4-A5, B6, and modules C1-C4, D
EPD author	Signify / Sustainability
EPD verification	Independent verification of this EPD and data, according to ISO 14025: ☐ Internal verification ☒ External verification
EPD verifier	Imane Uald Lamkaddam as an authorized verifier for EPD Hub

PRODUCT SPECIFICATION

Product name	TownTune Central Post-Top DTC BDP262
Product number / reference	912300024161 / BDP262 LED24-4S/740 II DM33 SRTB 62P
GTIN (Global Trade Item Number)	Not applicable
NOBB (Norwegian Building Product Database)	Not applicable
A1-A3 Specific data (%)	3.42

PRODUCT DESCRIPTION

Designed to enhance existing and scalable urban spaces, the TownTune family offers all the latest lighting innovations in terms of performance, quality of light and connectivity. The family consists of four solutions: a Central Post Top (CPT), an Asymmetric Spigot Post Top / Side Entry version (ASY), a version with an extending Lyre post top bracket (Lyre), and a Central Post Top with a Conical Comfort Bowl (CCB). Each TownTune luminaire can be customized with a choice of different shapes on top of the housing, plus there's the option to add a decorative ring, which comes in two colors (excluding CCB). Design options that enable you to create your very own lighting signature and bring a distinctive identity to districts and cities. In addition, every luminaire in the TownTune family is uniquely identifiable, thanks to the Signify Service tag app. By simply scanning a QR code, placed inside the door of the mast or directly on the luminaire, you can instantly access the configuration of the luminaire. This makes maintenance and programming operations faster and easier and enables you to create your digital library of lighting assets and spare parts. TownTune also uses the Philips LEDGINE-O lighting platform, ensuring you always have the right amount and direction of light on your street. Furthermore, thanks to being system ready (SR), TownTune is also future proof. A solution that's ready to be paired with both standalone and advanced control and lighting software applications such as Interact City.

This EPD is intended for business-to-business and/or business-to-consumer communication. Life Cycle Assessment study has been performed in accordance with the requirements of EN 15804, EPD Hub PCR version 1.2 (24 Mar 2025) and JRC characterization factors EF 3.1. The manufacturer has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but from different programs may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804 and if they are not compared in a building context.

PRODUCT CLASSIFICATION

Declared operating voltage, Volt	240
Light source colour temperature, Kelvin	4000
Protection index for water and dust (IP)	66
Impact resistance index (IK)	10
Luminous flux, Lumens	1800
Electrical power, Watt	14.8
Luminous efficiency, Lm/W	122
Additional characteristic	Not applicable

ABOUT THE MANUFACTURER

Signify is the world leader in lighting for professionals, consumers and lighting for the Internet of Things. Our energy efficient lighting products, systems and services enable our customers to enjoy a superior quality of light, and make people's lives safer and more comfortable, businesses more productive and cities more liveable.

For more information, please visit: <https://www.signify.com/global>

PRODUCT RAW MATERIAL MAIN COMPOSITION

Raw material category	Amount, mass- %	Material origin
Metals	67.57	EU , APAC
Minerals	0.01	EU
Fossil materials	32.41	EU , APAC
Bio-based materials	0	EU

BIOGENIC CARBON CONTENT

Product's biogenic carbon content at the factory gate

Biogenic carbon content in product, kg C	0
Biogenic carbon content in packaging, kg C	0.543

ENVIRONMENTAL DATA SUMMARY

Declared unit	1 unit
Declared unit mass, kg	7.704
Mass of packaging, kg	1.37
Functional unit (from PEP PSR0014)	Provide lighting that delivers an outgoing artificial luminous flux of 1000 lumens during a reference lifetime of 35000 hours
Reference service life (years)	25
Assigned lifetime (hours)	100000
GWP-total, A1-A3 (kg CO ₂ e)	68.6
GWP-fossil, A1-A3 (kg CO ₂ e)	70
Secondary material, inputs (%)	47.7
Secondary material, outputs (%)	47.5
Total energy use, A1-A3 (kWh)	253
Net freshwater use, A1-A3 (m ³)	3.42E-01

LIFE CYCLE ASSESSMENT

SYSTEM BOUNDARY

This EPD covers the life-cycle modules listed in the following table.

Product stage			Installation stage		Use stage							End of life stage				Beyond the system
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	X	X	ND	ND	ND	ND	ND	X	ND	X	X	X	X	X
Raw materials	Transport	Manufacturing	Transport	Installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstr./demo.	Transport	Waste processing	Disposal	Reuse, Recovery, Recycling

Modules not declared = ND.

CUT - OFF CRITERIA

The study does not exclude any modules or processes which are stated mandatory in the reference standard and the applied PCR. The study does not exclude any hazardous materials or substances. There is no neglected unit process more than 1% of total mass or energy flows. The module-specific total neglected input and output flows also do not exceed 5% of energy usage or mass.

The production of capital equipment, construction activities, and infrastructure, maintenance and operation of capital equipment, personnel-related activities, energy and water use related to company management and sales activities are excluded.

VALIDATION OF DATA

Data collection for production, transport, and packaging was conducted using time and site-specific information, as defined in the general information section on page 1 and 2. Upstream process calculations rely on generic data as defined in the Bibliography section. Manufacturer-provided specific and generic data were used for the product's manufacturing stage. The analysis was performed in One Click LCA EPD Generator, with the 'Cut-Off, EN 15804+A2' allocation method, and characterization factors according to EN 15804:2012+A2:2019/AC:2021 and JRC EF 3.1.

ALLOCATION, ESTIMATES AND ASSUMPTIONS

Allocation is required if some material, energy, and waste data cannot be measured separately for the product under investigation. All allocations are done as per the reference standards and the applied PCR. In this study, ancillary materials, energy & water consumption, material loss and waste generation at the manufacturing site are attributed to the bill of materials of the products, therefore, they are allocated by partitioning the quantities on the base of the total production in kg throughout the year. Thus, allocation has been done in the following ways:

Data type	Allocation
Raw materials	No allocation
Packaging materials	No allocation
Ancillary materials	Allocated by mass
Manufacturing energy and waste	Allocated by mass

Proxy data is used for certain materials due to their unavailability in the database. Conservative choices have been adopted when exact information was missing. Regarding module C1-C4: EOL scenarios are based on default values from EN 50693. For stages description please refer to section Product life cycle in this EPD report.

LCA SOFTWARE AND BIBLIOGRAPHY

This EPD has been created using One Click LCA Luminaire EPD Generator v2.2.7. The LCA and EPD have been prepared according to the reference standards, EN 50693, and ISO 14040/14044. Ecoinvent v 3.10.1 and One Click LCA databases were used as sources of environmental data. Allocation used in Ecoinvent 3.10.1 environmental data sources follow the methodology 'allocation, cut-off, EN 15804+A2'.

No other sources were used in the modelling of this EPD.

PRODUCT & MANUFACTURING SITES GROUPING

Type of grouping	No grouping
Grouping method	Not applicable
Variation in GWP-fossil for A1-A3, %	Not applicable

SUBSTANCES, REACH - VERY HIGH CONCERN

The product does not contain any REACH SVHC substances in amounts greater than 0,1 % (1000 ppm).

PRODUCT LIFE CYCLE

MANUFACTURING AND PACKAGING (A1-A3)

The environmental impacts considered for the product stage cover the manufacturing of raw materials used in the production. The material losses occurring during the manufacturing processes are treated as per the waste handling practices in the factory, while scenario assumptions are made in the absence of exact data. The study also considers the fuels used by machines as well as losses during electricity transmission.

The product is made of metals, plastics, and electronic components. All components are transported to the production facility, where the main manufacturing processes primarily are associated with assembly. A2 transport distances are calculated always taking the capital city of component country of origin as a starting point and exact manufacturing location as destination. The finished product can be packaged with polyethylene, cardboard, and/or paper as packaging material before shipment to customers. Manufacturing loss, ancillaries and wastes are calculated according to the data that each manufacturing site is sharing with Signify. The total annual amount of waste in kg is allocated to the total annual production in kg at the specific manufacturing site responsible to produce the studied product. Thus, it is possible to allocate it according to the weight of the product analysed in this study.

Co-product allocation is neglected as revenue of co-product is very low, hence, the waste undergoes a conservative waste treatment.

The use of green energy in manufacturing is demonstrated through contractual instruments (GOs, RECs, etc), and its use is ensured throughout the validity period of this EPD.

TRANSPORT AND INSTALLATION (A4-A5)

A4 transport distances are calculated always taking the exact manufacturing location to customer location. If the customer's location is defined as a country or its capital city, the calculation is made to the respective capital city. If the

customer's location is specified as a region, the distance is calculated to the capital city of the best-performing sales country within that region. The transportation method is a combination of lorry and container ship where needed. To be conservative, empty returns are included in this study as implemented through an average load factor in the Ecoinvent transport datapoints. Environmental impacts from installation include waste packaging materials (A5). The packaging waste treatment is assumed to be conservative with incineration without energy recovery. The impacts of energy consumption and the used ancillary materials during installation are considered negligible.

PRODUCT USE AND MAINTENANCE (B1-B7)


During the use phase, the product consumes electricity (B6), which is calculated multiplying the Wattage x Assigned lifetime (hours) x Country energy mix factor. To know which Country energy mix was used in this EPD, please refer to Annex 2.

The Reference service life in years is calculated according to the main application type of the product, based on annual operating hours. Impacts due to electricity production include direct emissions to air, transformation, and transmission losses.

PRODUCT END OF LIFE (C1-C4, D)

Consumption of energy and natural resources in demolition process is assumed to be negligible. It is assumed that the waste is collected separately and transported to the waste treatment centre. The transport distance is 150 km while the transportation method is assumed to be lorry (C2). According to EN 50693:2019, the sequence of treatment operations occurring to the product shall include depollution, fractions separation and preparation (dismantling, crushing, shredding, sorting), recycling, other material recovery, energy recovery and disposal. In this study, the default values from table G.4 of EN 50693 is used for treating materials in different waste treatment methods. Due to the material and energy recovery potential of parts in the lighting system, the end-of-life product is converted into recycled raw materials, while the energy recovered from incineration displaces electricity and heat production (D). The benefits and loads of incineration and recycling are included in Module D.

LIFE CYCLE FLOW DIAGRAM - SYSTEM BOUNDARY

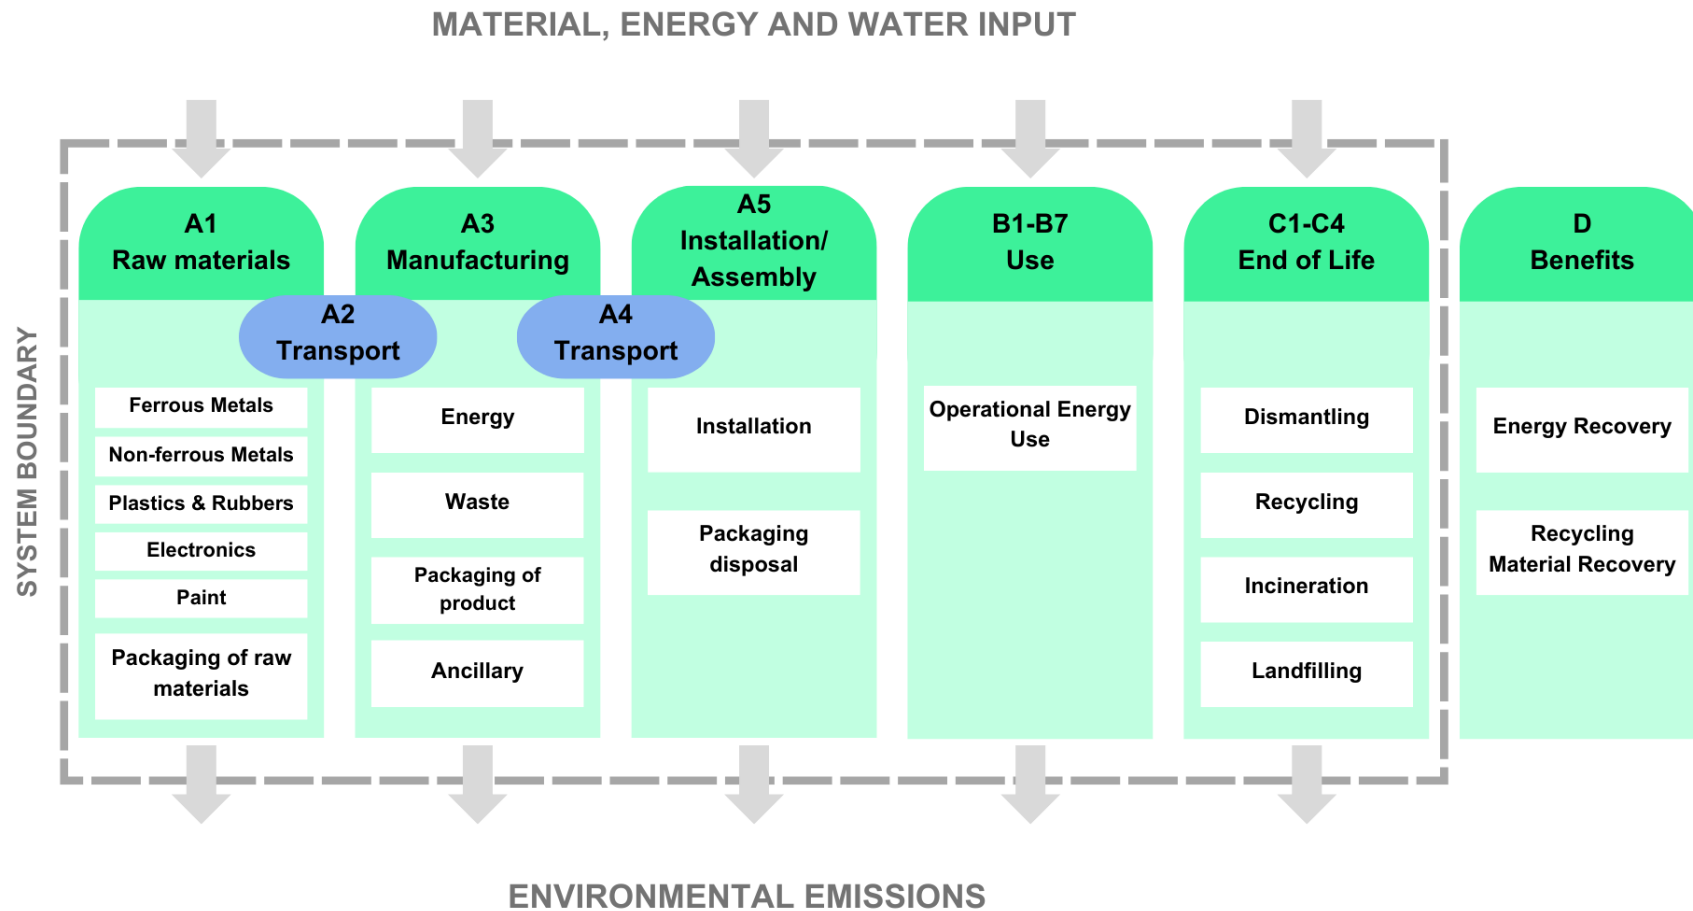

ENVIRONMENTAL IMPACT DATA, RESULTS PER DECLARED UNIT

The estimated impact results are only relative statements which do not indicate the end points of the impact categories, exceeding threshold values, safety margins or risks.

CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, EF 3.1

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total ¹⁾	kg CO ₂ e	6.67E+01	7.63E-01	1.08E+00	6.86E+01	2.70E+00	2.07E+00	ND	ND	ND	ND	ND	4.87E+02	ND	0.00E+00	2.26E-01	2.72E+00	1.35E+00	-4.56E+00
GWP – fossil	kg CO ₂ e	6.65E+01	7.62E-01	2.79E+00	7.00E+01	2.70E+00	8.58E-02	ND	ND	ND	ND	ND	4.84E+02	ND	0.00E+00	2.26E-01	2.72E+00	1.41E+00	-4.55E+00
GWP – biogenic	kg CO ₂ e	1.66E-01	1.72E-04	-1.75E+00	-1.58E+00	6.11E-04	1.98E+00	ND	ND	ND	ND	ND	1.09E+00	ND	0.00E+00	4.93E-05	-4.22E-04	-6.35E-02	-5.91E-03
GWP – LULUC	kg CO ₂ e	9.56E-02	3.42E-04	4.52E-02	1.41E-01	1.21E-03	3.17E-05	ND	ND	ND	ND	ND	1.49E+00	ND	0.00E+00	9.99E-05	1.65E-04	8.17E-05	-7.52E-03
Ozone depletion pot.	kg CFC-11e	9.20E-07	1.12E-08	6.58E-08	9.97E-07	3.98E-08	1.18E-09	ND	ND	ND	ND	ND	8.93E-06	ND	0.00E+00	3.16E-09	2.12E-09	1.44E-09	-2.62E-08
Acidification potential	mol H ⁺ e	4.19E-01	2.99E-03	1.16E-02	4.34E-01	9.19E-03	5.10E-04	ND	ND	ND	ND	ND	2.85E+00	ND	0.00E+00	7.52E-04	1.73E-03	6.43E-04	-4.90E-02
EP-freshwater ²⁾	kg Pe	2.59E-02	5.86E-05	9.93E-04	2.69E-02	2.10E-04	8.62E-06	ND	ND	ND	ND	ND	4.51E-01	ND	0.00E+00	1.76E-05	6.82E-05	2.17E-05	-3.13E-03
EP-marine	kg Ne	6.86E-02	9.47E-04	5.05E-03	7.46E-02	3.02E-03	2.38E-04	ND	ND	ND	ND	ND	4.47E-01	ND	0.00E+00	2.44E-04	5.87E-04	1.77E-03	-5.23E-03
EP-terrestrial	mol Ne	7.01E-01	1.03E-02	3.21E-02	7.43E-01	3.29E-02	2.17E-03	ND	ND	ND	ND	ND	4.00E+00	ND	0.00E+00	2.65E-03	5.68E-03	2.87E-03	-5.73E-02
POCP (“smog”) ³⁾	kg NMVOCe	2.53E-01	4.09E-03	1.25E-02	2.70E-01	1.35E-02	6.18E-04	ND	ND	ND	ND	ND	1.32E+00	ND	0.00E+00	1.05E-03	1.55E-03	8.40E-04	-1.70E-02
ADP-minerals & metals ⁴⁾	kg Sbe	1.82E-03	2.10E-06	1.45E-05	1.84E-03	7.52E-06	2.55E-07	ND	ND	ND	ND	ND	6.54E-03	ND	0.00E+00	7.41E-07	6.11E-06	2.25E-07	-4.08E-04
ADP-fossil resources	MJ	8.60E+02	1.10E+01	3.73E+01	9.08E+02	3.91E+01	8.88E-01	ND	ND	ND	ND	ND	1.13E+04	ND	0.00E+00	3.17E+00	1.86E+00	1.12E+00	-5.48E+01
Water use ⁵⁾	m ³ e depr.	1.90E+01	5.41E-02	1.05E+00	2.01E+01	1.93E-01	1.03E-01	ND	ND	ND	ND	ND	3.07E+02	ND	0.00E+00	1.47E-02	1.94E-01	9.83E-02	-1.05E+00

1) GWP = Global Warming Potential. 2) EP = Eutrophication potential. Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO4e. 3) POCP = Photochemical ozone formation. 4) ADP = Abiotic depletion potential. 5) EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

ADDITIONAL (OPTIONAL) ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, EF 3.1

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Particulate matter	Incidence	4.67E-06	7.53E-08	2.04E-07	4.95E-06	2.70E-07	6.36E-09	ND	ND	ND	ND	ND	1.02E-05	ND	0.00E+00	1.79E-08	1.85E-08	8.16E-09	-3.18E-07
Ionizing radiation ⁶⁾	kBq U235e	3.40E+00	9.53E-03	1.20E-01	3.53E+00	3.41E-02	1.08E-03	ND	ND	ND	ND	ND	3.11E+02	ND	0.00E+00	2.56E-03	7.01E-03	1.76E-03	-5.06E-01
Ecotoxicity (freshwater)	CTUe	9.15E+02	1.55E+00	1.28E+01	9.29E+02	5.53E+00	2.46E+00	ND	ND	ND	ND	ND	1.72E+03	ND	0.00E+00	5.01E-01	5.85E+00	1.41E+02	-3.16E+01
Human toxicity, cancer	CTUh	5.55E-08	1.27E-10	1.32E-09	5.70E-08	4.45E-10	1.18E-10	ND	ND	ND	ND	ND	1.64E-07	ND	0.00E+00	3.84E-11	3.07E-10	1.58E-10	-4.03E-09
Human tox. non-cancer	CTUh	1.40E-06	7.07E-09	3.52E-08	1.44E-06	2.53E-08	4.83E-09	ND	ND	ND	ND	ND	8.49E-06	ND	0.00E+00	1.98E-09	1.33E-08	9.61E-09	-3.82E-07
SQP ⁷⁾	-	2.44E+02	1.09E+01	1.32E+02	3.87E+02	3.94E+01	4.35E-01	ND	ND	ND	ND	ND	2.51E+03	ND	0.00E+00	1.89E+00	2.40E+00	1.42E+00	-2.10E+01

USE OF NATURAL RESOURCES

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Renew. PER as energy ⁸⁾	MJ	7.33E+01	1.50E-01	9.35E+00	8.28E+01	5.36E-01	-2.43E+01	ND	ND	ND	ND	ND	3.09E+03	ND	0.00E+00	4.34E-02	2.28E-01	-1.15E+00	-7.47E+00
Renew. PER as material	MJ	2.30E+00	0.00E+00	1.53E+01	1.76E+01	0.00E+00	-1.75E+01	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	-8.20E-03	-1.52E-02	0.00E+00
Total use of renew. PER	MJ	7.56E+01	1.50E-01	2.46E+01	1.00E+02	5.36E-01	-4.19E+01	ND	ND	ND	ND	ND	3.09E+03	ND	0.00E+00	4.34E-02	2.20E-01	-1.16E+00	-7.47E+00
Non-re. PER as energy	MJ	7.87E+02	1.10E+01	3.01E+01	8.28E+02	3.91E+01	8.88E-01	ND	ND	ND	ND	ND	1.13E+04	ND	0.00E+00	3.17E+00	-3.80E+01	-4.21E+01	-5.48E+01
Non-re. PER as material	MJ	7.00E+01	0.00E+00	-1.61E+00	6.84E+01	0.00E+00	-1.55E-01	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	-3.33E+01	-3.50E+01	0.00E+00
Total use of non-re. PER	MJ	8.57E+02	1.10E+01	2.85E+01	8.97E+02	3.91E+01	7.33E-01	ND	ND	ND	ND	ND	1.13E+04	ND	0.00E+00	3.17E+00	-7.13E+01	-7.70E+01	-5.48E+01
Secondary materials	kg	3.67E+00	0.00E+00	0.00E+00	3.67E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Renew. secondary fuels	MJ	4.54E-02	5.88E-05	1.45E-01	1.91E-01	2.12E-04	1.10E-05	ND	ND	ND	ND	ND	1.49E-02	ND	0.00E+00	1.81E-05	8.47E-05	1.80E-05	-6.55E-04
Non-ren. secondary fuels	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Use of net fresh water	m ³	3.16E-01	1.62E-03	2.37E-02	3.42E-01	5.78E-03	1.67E-03	ND	ND	ND	ND	ND	9.74E+00	ND	0.00E+00	4.19E-04	3.55E-03	-3.98E-03	-3.49E-02

8) PER = Primary energy resources.

END OF LIFE – WASTE

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste	kg	1.01E+01	1.86E-02	1.52E-01	1.03E+01	6.63E-02	2.70E-02	ND	ND	ND	ND	ND	2.85E+01	ND	0.00E+00	5.52E-03	5.54E-02	5.81E-02	-4.97E-01
Non-hazardous waste	kg	2.29E+02	3.43E-01	9.99E+00	2.39E+02	1.23E+00	1.46E+00	ND	ND	ND	ND	ND	2.21E+03	ND	0.00E+00	1.04E-01	1.52E+00	1.01E+01	-1.69E+01
Radioactive waste	kg	8.50E-04	2.33E-06	2.87E-05	8.81E-04	8.34E-06	2.69E-07	ND	ND	ND	ND	ND	8.00E-02	ND	0.00E+00	6.28E-07	1.73E-06	4.35E-07	-1.24E-04

END OF LIFE – OUTPUT FLOWS

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Components for reuse	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling	kg	0.00E+00	0.00E+00	9.25E-02	9.25E-02	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	3.66E+00	0.00E+00	0.00E+00
Materials for energy rec	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Exported energy	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	1.25E+01	0.00E+00	0.00E+00
Exported energy – Electricity	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	5.27E+00	0.00E+00	0.00E+00
Exported energy – Heat	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	7.24E+00	0.00E+00	0.00E+00

ENVIRONMENTAL IMPACTS – EN 15804+A1, CML

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Global Warming Pot.	kg CO ₂ e	6.65E+01	7.58E-01	2.97E+00	7.02E+01	2.68E+00	8.51E-02	ND	ND	ND	ND	ND	4.85E+02	ND	0.00E+00	2.25E-01	2.72E+00	1.47E+00	-4.53E+00
Ozone depletion Pot.	kg CFC-11e	8.30E-07	8.97E-09	6.57E-08	9.05E-07	3.18E-08	1.00E-09	ND	ND	ND	ND	ND	7.46E-06	ND	0.00E+00	2.52E-09	1.82E-09	1.20E-09	-2.22E-08
Acidification	kg SO ₂ e	3.52E-01	2.30E-03	8.20E-03	3.63E-01	7.02E-03	3.75E-04	ND	ND	ND	ND	ND	2.43E+00	ND	0.00E+00	5.76E-04	1.34E-03	4.65E-04	-4.23E-02
Eutrophication	kg PO ₄ ³ e	1.12E-01	5.13E-04	5.45E-03	1.18E-01	1.71E-03	1.16E-04	ND	ND	ND	ND	ND	3.14E-01	ND	0.00E+00	1.40E-04	2.81E-04	3.49E-04	-3.16E-03
POCP ("smog")	kg C ₂ H ₄ e	3.01E-02	1.91E-04	9.23E-04	3.13E-02	6.26E-04	2.86E-05	ND	ND	ND	ND	ND	1.32E-01	ND	0.00E+00	5.16E-05	8.17E-05	5.77E-05	-2.05E-03
ADP-elements	kg Sbe	1.80E-03	2.05E-06	1.42E-05	1.81E-03	7.33E-06	2.13E-07	ND	ND	ND	ND	ND	6.52E-03	ND	0.00E+00	7.24E-07	6.04E-06	1.91E-07	-4.07E-04
ADP-fossil	MJ	8.04E+02	1.09E+01	3.53E+01	8.50E+02	3.86E+01	8.71E-01	ND	ND	ND	ND	ND	5.78E+03	ND	0.00E+00	3.13E+00	1.75E+00	1.09E+00	-4.67E+01

ADDITIONAL INDICATOR – GWP-GHG

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP-GHG 9)	kg CO ₂ e	6.66E+01	7.63E-01	2.83E+00	7.02E+01	2.70E+00	8.59E-02	ND	ND	ND	ND	ND	4.86E+02	ND	0.00E+00	2.26E-01	2.72E+00	1.41E+00	-4.56E+00

9) This indicator includes all greenhouse gases excluding biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. In addition, the characterisation factors for the flows - CH₄ fossil, CH₄ biogenic and Dinitrogen monoxide - were updated. This indicator is identical to the GWP-total of EN 15804:2012+A2:2019 except that the characterization factor for biogenic CO₂ is set to zero.

ENVIRONMENTAL IMPACT DATA, RESULTS PER FUNCTIONAL UNIT

The estimated impact results are only relative statements which do not indicate the end points of the impact categories, exceeding threshold values, safety margins or risks.

CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, EF 3.1

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total ¹⁾	kg CO ₂ éq/FU	1.30E+01	1.48E-01	2.10E-01	1.33E+01	5.25E-01	4.02E-01	ND	ND	ND	ND	ND	9.47E+01	ND	0.00E+00	4.39E-02	5.30E-01	2.62E-01	-8.87E-01
GWP – fossil	kg CO ₂ éq/FU	1.29E+01	1.48E-01	5.42E-01	1.36E+01	5.24E-01	1.67E-02	ND	ND	ND	ND	ND	9.42E+01	ND	0.00E+00	4.39E-02	5.30E-01	2.74E-01	-8.85E-01
GWP – biogenic	kg CO ₂ éq/FU	3.23E-02	3.34E-05	-3.40E-01	-3.08E-01	1.19E-04	3.86E-01	ND	ND	ND	ND	ND	2.11E-01	ND	0.00E+00	9.58E-06	-8.22E-05	-1.23E-02	-1.15E-03
GWP – LULUC	kg CO ₂ éq/FU	1.86E-02	6.66E-05	8.78E-03	2.74E-02	2.35E-04	6.16E-06	ND	ND	ND	ND	ND	2.89E-01	ND	0.00E+00	1.94E-05	3.21E-05	1.59E-05	-1.46E-03
Ozone depletion pot.	kg CFC ₁₁ e/FU	1.79E-07	2.19E-09	1.28E-08	1.94E-07	7.74E-09	2.29E-10	ND	ND	ND	ND	ND	1.74E-06	ND	0.00E+00	6.14E-10	4.13E-10	2.80E-10	-5.09E-09
Acidification potential	mole H ⁺ e/FU	8.15E-02	5.81E-04	2.26E-03	8.43E-02	1.79E-03	9.92E-05	ND	ND	ND	ND	ND	5.54E-01	ND	0.00E+00	1.46E-04	3.36E-04	1.25E-04	-9.53E-03
EP-freshwater ²⁾	kg Pe/FU	5.03E-03	1.14E-05	1.93E-04	5.23E-03	4.08E-05	1.68E-06	ND	ND	ND	ND	ND	8.77E-02	ND	0.00E+00	3.41E-06	1.33E-05	4.22E-06	-6.08E-04
EP-marine	kg Ne/FU	1.33E-02	1.84E-04	9.81E-04	1.45E-02	5.87E-04	4.63E-05	ND	ND	ND	ND	ND	8.69E-02	ND	0.00E+00	4.74E-05	1.14E-04	3.44E-04	-1.02E-03
EP-terrestrial	mol Ne/FU	1.36E-01	2.01E-03	6.25E-03	1.44E-01	6.39E-03	4.22E-04	ND	ND	ND	ND	ND	7.79E-01	ND	0.00E+00	5.16E-04	1.10E-03	5.58E-04	-1.11E-02
POCP (“smog”) ³⁾	kg NMVOCe/	4.93E-02	7.94E-04	2.43E-03	5.25E-02	2.63E-03	1.20E-04	ND	ND	ND	ND	ND	2.56E-01	ND	0.00E+00	2.04E-04	3.01E-04	1.63E-04	-3.31E-03
ADP-minerals & metals ⁴⁾	kg Sbe/FU	3.55E-04	4.08E-07	2.81E-06	3.58E-04	1.46E-06	4.97E-08	ND	ND	ND	ND	ND	1.27E-03	ND	0.00E+00	1.44E-07	1.19E-06	4.38E-08	-7.93E-05
ADP-fossil resources	MJ/FU	1.67E+02	2.14E+00	7.25E+00	1.77E+02	7.61E+00	1.73E-01	ND	ND	ND	ND	ND	2.19E+03	ND	0.00E+00	6.16E-01	3.62E-01	2.18E-01	-1.07E+01
Water use ⁵⁾	m ³ e priv. /FU	3.70E+00	1.05E-02	2.03E-01	3.91E+00	3.76E-02	2.00E-02	ND	ND	ND	ND	ND	5.97E+01	ND	0.00E+00	2.86E-03	3.77E-02	1.91E-02	-2.04E-01

1) GWP = Global Warming Potential. 2) EP = Eutrophication potential. Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO4e. 3) POCP = Photochemical ozone formation. 4) ADP = Abiotic depletion potential. 5) EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

ADDITIONAL (OPTIONAL) ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, EF 3.1

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Particulate matter	Incidence /FU	9.09E-07	1.46E-08	3.96E-08	9.63E-07	5.25E-08	1.24E-09	ND	ND	ND	ND	ND	1.98E-06	ND	0.00E+00	3.48E-09	3.60E-09	1.59E-09	-6.18E-08
Ionizing radiation ⁶⁾	kBq U235e/FU	6.61E-01	1.85E-03	2.34E-02	6.86E-01	6.63E-03	2.09E-04	ND	ND	ND	ND	ND	6.06E+01	ND	0.00E+00	4.98E-04	1.36E-03	3.42E-04	-9.83E-02
Ecotoxicity (freshwater)	CTUe/FU	1.78E+02	3.01E-01	2.49E+00	1.81E+02	1.08E+00	4.78E-01	ND	ND	ND	ND	ND	3.34E+02	ND	0.00E+00	9.74E-02	1.14E+00	2.73E+01	-6.14E+00
Human toxicity, cancer	CTUh/FU	1.08E-08	2.46E-11	2.56E-10	1.11E-08	8.65E-11	2.30E-11	ND	ND	ND	ND	ND	3.18E-08	ND	0.00E+00	7.46E-12	5.96E-11	3.06E-11	-7.84E-10
Human tox. non-cancer	CTUh/FU	2.71E-07	1.37E-09	6.84E-09	2.79E-07	4.93E-09	9.39E-10	ND	ND	ND	ND	ND	1.65E-06	ND	0.00E+00	3.85E-10	2.58E-09	1.87E-09	-7.43E-08
SQP ⁷⁾	-/FU	4.75E+01	2.13E+00	2.56E+01	7.53E+01	7.66E+00	8.45E-02	ND	ND	ND	ND	ND	4.88E+02	ND	0.00E+00	3.68E-01	4.67E-01	2.75E-01	-4.08E+00

USE OF NATURAL RESOURCES

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Renew. PER as energy ⁸⁾	MJ/FU	1.42E+01	2.92E-02	1.82E+00	1.61E+01	1.04E-01	-4.73E+00	ND	ND	ND	ND	ND	6.01E+02	ND	0.00E+00	8.44E-03	4.44E-02	-2.23E-01	-1.45E+00
Renew. PER as material	MJ/FU	4.47E-01	0.00E+00	2.97E+00	3.41E+00	0.00E+00	-3.41E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	-1.60E-03	-2.96E-03	0.00E+00
Total use of renew. PER	MJ/FU	1.47E+01	2.92E-02	4.78E+00	1.95E+01	1.04E-01	-8.14E+00	ND	ND	ND	ND	ND	6.01E+02	ND	0.00E+00	8.44E-03	4.28E-02	-2.26E-01	-1.45E+00
Non-re. PER as energy	MJ/FU	1.53E+02	2.14E+00	5.85E+00	1.61E+02	7.61E+00	1.73E-01	ND	ND	ND	ND	ND	2.19E+03	ND	0.00E+00	6.16E-01	-7.39E+00	-8.18E+00	-1.07E+01
Non-re. PER as material	MJ/FU	1.36E+01	0.00E+00	-3.13E-01	1.33E+01	0.00E+00	-3.01E-02	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	-6.47E+00	-6.80E+00	0.00E+00
Total use of non-re. PER	MJ/FU	1.67E+02	2.14E+00	5.54E+00	1.74E+02	7.61E+00	1.43E-01	ND	ND	ND	ND	ND	2.19E+03	ND	0.00E+00	6.16E-01	-1.39E+01	-1.50E+01	-1.07E+01
Secondary materials	kg/FU	7.14E-01	0.00E+00	0.00E+00	7.14E-01	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Renew. secondary fuels	MJ/FU	8.82E-03	1.14E-05	2.83E-02	3.71E-02	4.11E-05	2.15E-06	ND	ND	ND	ND	ND	2.89E-03	ND	0.00E+00	3.52E-06	1.65E-05	3.51E-06	-1.27E-04
Non-ren. secondary fuels	MJ/FU	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Use of net fresh water	m ³ /FU	6.15E-02	3.14E-04	4.61E-03	6.64E-02	1.12E-03	3.24E-04	ND	ND	ND	ND	ND	1.89E+00	ND	0.00E+00	8.16E-05	6.90E-04	-7.74E-04	-6.79E-03

8) PER = Primary energy resources.

END OF LIFE – WASTE

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste	kg/FU	1.96E+00	3.62E-03	2.96E-02	1.99E+00	1.29E-02	5.25E-03	ND	ND	ND	ND	ND	5.55E+00	ND	0.00E+00	1.07E-03	1.08E-02	1.13E-02	-9.67E-02
Non-hazardous waste	kg/FU	4.45E+01	6.67E-02	1.94E+00	4.65E+01	2.38E-01	2.85E-01	ND	ND	ND	ND	ND	4.29E+02	ND	0.00E+00	2.01E-02	2.95E-01	1.96E+00	-3.29E+00
Radioactive waste	kg/FU	1.65E-04	4.53E-07	5.58E-06	1.71E-04	1.62E-06	5.24E-08	ND	ND	ND	ND	ND	1.56E-02	ND	0.00E+00	1.22E-07	3.36E-07	8.45E-08	-2.41E-05

END OF LIFE – OUTPUT FLOWS

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Components for reuse	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling	kg	0.00E+00	0.00E+00	1.80E-02	1.80E-02	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	7.12E-01	0.00E+00	0.00E+00
Materials for energy rec	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Exported energy	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	2.43E+00	0.00E+00	0.00E+00
Exported energy – Electricity	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	1.02E+00	0.00E+00	0.00E+00
Exported energy – Heat	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	1.41E+00	0.00E+00	0.00E+00

ENVIRONMENTAL IMPACTS – EN 15804+A1, CML

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Global Warming Pot.	kg CO ₂ eq./FU	1.29E+01	1.47E-01	5.78E-01	1.37E+01	5.21E-01	1.66E-02	ND	ND	ND	ND	ND	9.42E+01	ND	0.00E+00	4.37E-02	5.29E-01	2.86E-01	-8.81E-01
Ozone depletion Pot.	kg CFC ₁₁ e/FU	1.61E-07	1.74E-09	1.28E-08	1.76E-07	6.18E-09	1.95E-10	ND	ND	ND	ND	ND	1.45E-06	ND	0.00E+00	4.90E-10	3.54E-10	2.33E-10	-4.31E-09
Acidification	kg SO ₂ e/FU	6.85E-02	4.47E-04	1.59E-03	7.06E-02	1.36E-03	7.29E-05	ND	ND	ND	ND	ND	4.72E-01	ND	0.00E+00	1.12E-04	2.60E-04	9.03E-05	-8.22E-03
Eutrophication	kg PO ₄ ³ e/FU	2.17E-02	9.97E-05	1.06E-03	2.29E-02	3.33E-04	2.26E-05	ND	ND	ND	ND	ND	6.10E-02	ND	0.00E+00	2.73E-05	5.45E-05	6.79E-05	-6.15E-04
POCP (“smog”)	kg C ₂ H ₄ e/FU	5.86E-03	3.71E-05	1.79E-04	6.08E-03	1.22E-04	5.55E-06	ND	ND	ND	ND	ND	2.57E-02	ND	0.00E+00	1.00E-05	1.59E-05	1.12E-05	-3.99E-04
ADP-elements	kg Sbe/FU	3.50E-04	3.98E-07	2.75E-06	3.53E-04	1.43E-06	4.15E-08	ND	ND	ND	ND	ND	1.27E-03	ND	0.00E+00	1.41E-07	1.17E-06	3.72E-08	-7.92E-05
ADP-fossil	MJ/FU	1.56E+02	2.11E+00	6.86E+00	1.65E+02	7.50E+00	1.69E-01	ND	ND	ND	ND	ND	1.12E+03	ND	0.00E+00	6.08E-01	3.40E-01	2.13E-01	-9.09E+00

ADDITIONAL INDICATOR – GWP-GHG

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP-GHG ⁹⁾	kg CO ₂ e/FU	1.29E+01	1.48E-01	5.50E-01	1.36E+01	5.24E-01	1.67E-02	ND	ND	ND	ND	ND	9.45E+01	ND	0.00E+00	4.39E-02	5.30E-01	2.74E-01	-8.86E-01

9) This indicator includes all greenhouse gases excluding biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. In addition, the characterisation factors for the flows - CH₄ fossil, CH₄ biogenic and Dinitrogen monoxide - were updated. This indicator is identical to the GWP-total of EN 15804:2012+A2:2019 except that the characterization factor for biogenic CO₂ is set to zero.

SCENARIO DOCUMENTATION

DATA SOURCES

Manufacturing energy scenario documentation – A3 (Energy data source)

1. Energy supply, electricity production, co-generation oil and gas, Heat and power co-generation, natural gas, combined cycle power plant, 400MW electrical, Spain, ecoinvent 3.10.1, 0.0249 kgCO₂e/MJ
2. Energy supply, electricity production, solar photovoltaic, Electricity production, photovoltaic, 570kWp open ground installation, multi-Si, Spain, ecoinvent 3.10.1, 0.0673 kgCO₂e/kWh

Transport scenario documentation - A4

1. Transport, freight, lorry >32 metric ton, EURO5, 2760.17 km
2. Transport, freight, sea, container ship, 0.0 km

Installation scenario documentation - A5 (Waste materials data source)

1. Market for corrugated board box, 1.319 kg
2. Market for printed paper, offset, 0.051 kg

Use stages scenario documentation - B6-B7 (Energy data source)

1. Energy supply, electricity transformation and distribution, distribution low voltage, Market group for electricity, low voltage, Europe, 1480.0 kWh

TRANSPORT SCENARIO DOCUMENTATION - A4

Scenario parameter	Value
Capacity utilization (including empty return) %	50 %
Bulk density of transported products / kg/m ³	9.31E+01
Volume capacity utilization factor (factor: =1 or <1 or ≥1 for compressed or nested packaged products)	1

INSTALLATION SCENARIO DOCUMENTATION - A5

Scenario parameter	Value
Ancillary materials for installation (specified by material) / kg or other units as appropriate	0
Water use / m ³	0
Other resource use / kg	0
Direct emissions to ambient air, soil and water / kg	0

USE STAGES SCENARIO DOCUMENTATION - B6-B7 USE OF ENERGY AND WATER

Scenario information	Value
Ancillary materials specified by material / kg or units as appropriate	Not applicable
Net fresh water consumption / m ³	0
Power output of equipment / kW	14.8
Characteristic performance, e.g., energy efficiency, emissions, variation of performance with capacity utilization, etc. / Units as appropriate	For more details see product classification table and product description.
Further assumptions for scenario development, e.g., frequency and period of use, number of occupants / Units as appropriate	For more details see product classification table and product description.

END OF LIFE SCENARIO DOCUMENTATION

Scenario information	Value
Collection process – kg collected separately	7.704
Collection process – kg collected with mixed waste	0
Recovery process – kg for re-use	0
Recovery process – kg for recycling	3.66E+00
Recovery process – kg for energy recovery	0
Disposal (total) – kg for final deposition	2.91E+00
Scenario assumptions e.g. transportation	Lorry, 16-32 metric ton, EURO5; 150 km

THIRD-PARTY VERIFICATION STATEMENT

EPD Hub declares that this EPD is verified in accordance with ISO 14025 by an independent, third-party verifier. The project report on the Life Cycle Assessment and the report(s) on features of environmental relevance are filed at EPD Hub. EPD Hub PCR and ECO Platform verification checklist are used.

EPD Hub is not able to identify any unjustified deviations from the PCR and EN 15804+A2 in the Environmental Product Declaration and its project report.

EPD Hub maintains its independence as a third-party body; it was not involved in the execution of the LCA or in the development of the declaration and has no conflicts of interest regarding this verification.

The company-specific data and upstream and downstream data have been examined as regards plausibility and consistency. The publisher is responsible for ensuring the factual integrity and legal compliance of this declaration.



Program assistant: Xinyuan Zhang



The software used in creation of this LCA and EPD is verified by EPD Hub to conform to the procedural and methodological requirements outlined in ISO 14025:2010, ISO 14040/14044, EN 15804+A2, and EPD Hub Core Product Category Rules and General Program Instructions.

[Verified tools](#)

Tool verifier: Hai Ha Nguyen

Tool verification validity: 28 March 2025 - 27 March 2028

APPENDIX 1

MATERIAL COMPOSITION

The product material composition is illustrated in the table below. The material weight is given in grams and in percentage on total product weight.

Table 1: Material composition

Material	Weight (g)	Weight-%
Aluminium	4954.0	64.31
Copper	34.25	0.44
Other Plastics	2233.06	28.99
Paint	128.0	1.66
PCB Alu	55.8	0.72
PCB Copper	41.01	0.53
PCB Iron	32.85	0.43
PCB Non-ferrous metal	0.02	0.0
PCB Support	135.99	1.77
PCB Tin	2.26	0.03
Silica Sand	1.0	0.01
Stainless Steel	2.0	0.03



Steel

83.52

1.08

APPENDIX 2

USE PHASE (B6) VALUES FOR DIFFERENT COUNTRY MIX

In this EPD the B6 impact has been calculated using the energy mix of EU. The table in this appendix is useful for conversion and comparison of B6 values with other energy country mix. The Global Warming Potential Total (GWP tot) value is illustrated for each country. The value refers to 1 kwh.

Example on how to use the table:

If for example this EPD was done according to EU energy mix and you want to see how the GWP total changes according to a Finland country energy mix, you can take the original value in the results table here highlighted in yellow:

ENVIRONMENTAL IMPACT DATA, RESULTS PER DECLARED UNIT

The estimated impact results are only relative statements which do not indicate the end points of the impact categories, exceeding threshold values, safety margins or risks.

CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, EF 3.1

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total ⁽¹⁾	kg CO ₂ e	4.44E-01	4.75E-03	2.34E-02	4.72E-01	9.50E-04	8.13E-03	ND	ND	ND	ND	ND	4.06E-02	ND	0.00E+00	5.50E-04	2.23E-03	7.33E-04	-2.82E-02

Divide that value according to the EU value from the following table (EU = 3.30E-01) and then multiplying for the Finland value from the same table (FINLAND = 1.54E-01).

Thus, the calculation of this example would be:

New B6 GWP tot for Finland = (4.06E-02 / 3.30E-01) x 1.54E-01 = 1.89E-02.

Country	GWP tot (kg CO2 eq. per kwh)		
AFRICA	7.30E-01	GERMANY	3.90E-01
APAC	9.50E-01	INDIA	1.50E+00
AUSTRALIA	8.40E-01	ITALY	3.50E-01
AUSTRIA	2.30E-01	LATAM	3.90E-01
BELGIUM	2.00E-01	NAM	4.50E-01
CHINA	1.02E+00	NETHERLANDS	3.90E-01
DENMARK	1.60E-01	NORWAY	4.50E-02
EU	3.30E-01	ROW	7.30E-01
FINLAND	1.54E-01	SPAIN	2.10E-01
FRANCE	8.70E-02	SWEDEN	3.70E-02
		UK	2.60E-01

Source Ecoinvent 3.10.1

APPENDIX 3 - EPD HUB ALIGNED

This section represents the scaling method for the **B6 module**, following the PEP EcoPassport PSR for luminaries (PSR-0014-ed2.0-EN-2023 07 13). The GWP results were scaled from a reference variant of a product family, based on various light management scenarios and power inputs of the luminaires within the same product family.

To calculate the Scaled Impact (*SI*), we have followed the below methods:

1. Calculate the power scaling factor (PSF), which is the ratio of the power input of the variant in questions P_{in} and the power input of the base variant P_{base} .

$$PSF = \frac{P_{in}}{P_{base}}$$

2. Calculate the Total Scaling factor by multiplying the PSF by the control scaling factor (CSF), where the CSF is determined according the relevant control factor scenario (e.g. if the luminaire has a presence detection system). The presented controls factors values in Table A1 are based on BS EN 15193-1:2017. Please refer to this publication or contact Signify directly for more information.

$$TSF = PSF * CSF$$

Table 1: Light management function (PEP EcoPassport aligned)

Scenario	Abbrev.	CSF
No control	NC	1
Daylight dependency factor	DD	0.75
Presence sensing	PS	0.75
Daylight dependency and presence sensing	DD+PS	0.55

3. Lastly, the GWP of the base variant is then scaled by the TSF.

$$\text{Scaled Impact} = \text{GWP}_{\text{case}} * \text{TSF}$$

The following list of product configurations is not exhaustive. Please use the formula defined in point 1 above to calculate the exact power scaling factor (PSF) for any specific configuration.

Table 2: GWP per scaling factor (EPD Hub aligned)

	12NC or Product Family Code	Description	Flux [lm]	Power [W]	Efficacy [lm/W]	PSF	Total Scaling Factor (TSF)				Scaled Impacts (GWP100 B6 - kg CO2eq.)			
							NC	DD	PS	DD+PS	NC	DD	PS	DD+PS
1	BDP262	BDP262LED8-4S740DM33	608	5.7	106.7	0.385	0.385	0.289	0.289	0.212	187.5	140.7	140.7	103.2
2	BDP262	BDP262LED10-4S740DM33	760	6.9	110.1	0.466	0.466	0.35	0.35	0.256	226.9	170.4	170.4	124.7
3	BDP262	BDP262LED12-4S740DM33	912	7.9	115.4	0.534	0.534	0.401	0.401	0.294	260.0	195.3	195.3	143.2
4	BDP262	BDP262LED14-4S740DM33	1064	8.9	119.6	0.601	0.601	0.451	0.451	0.331	292.6	219.6	219.6	161.2
5	BDP262	BDP262LED16-4S740DM33	1216	10.0	121.6	0.676	0.676	0.507	0.507	0.372	329.2	246.9	246.9	181.1
6	BDP262	BDP262LED18-4S740DM33	1368	11.2	122.1	0.757	0.757	0.568	0.568	0.416	368.6	276.6	276.6	202.6
7	BDP262	BDP262LED20-4S740DM33	1520	12.4	122.6	0.838	0.838	0.628	0.628	0.461	408.0	305.8	305.8	224.5
8	BDP262	BDP262LED22-4S740DM33	1672	13.4	124.8	0.905	0.905	0.679	0.679	0.498	440.7	330.6	330.6	242.5
9	BDP262	BDP262LED24-4S740DM33	1800	14.8	121.6	1.0	1.0	0.75	0.75	0.55	486.9	365.2	365.2	267.8
10	BDP262	BDP262LED27-4S740DM33	2025	16.6	122.0	1.122	1.122	0.842	0.842	0.617	546.3	410.0	410.0	300.4

11	BDP262	BDP262LED30-4S740DM33	2250	18.6	121.0	1.257	1.257	0.943	0.943	0.691	612.1	459.2	459.2	336.5
12	BDP262	BDP262LED35-4S740DM33	2625	22.0	119.3	1.486	1.486	1.115	1.115	0.817	723.6	542.9	542.9	397.8
13	BDP262	BDP262LED39-4S740DM33	2886	23.0	125.5	1.554	1.554	1.165	1.165	0.855	756.7	567.3	567.3	416.3
14	BDP262	BDP262LED45-4S740DM33	3330	27.0	123.3	1.824	1.824	1.368	1.368	1.003	888.1	666.1	666.1	488.4
15	BDP262	BDP262LED50-4S740DM33	3700	30.0	123.3	2.027	2.027	1.52	1.52	1.115	987.0	740.1	740.1	542.9
16	BDP262	BDP262LED55-4S740DM33	4144	33.0	125.6	2.23	2.23	1.672	1.672	1.227	1085.8	814.1	814.1	597.5
17	BDP262	BDP262LED59-4S740DM33	4440	36.0	123.3	2.432	2.432	1.824	1.824	1.338	1184.2	888.1	888.1	651.5
18	BDP262	BDP262LED64-4S740DM33	4736	39.5	119.9	2.669	2.669	2.002	2.002	1.468	1299.6	974.8	974.8	714.8
19	BDP262	BDP262LED69-4S740DM33	5180	38.5	134.5	2.601	2.601	1.951	1.951	1.431	1266.5	950.0	950.0	696.8
20	BDP262	BDP262LED74-4S740DM33	5476	41.5	132.0	2.804	2.804	2.103	2.103	1.542	1365.3	1024.0	1024.0	750.8
21	BDP262	BDP262LED79-4S740DM33	5772	44.5	129.7	3.007	3.007	2.255	2.255	1.654	1464.2	1098.0	1098.0	805.4
22	BDP262	BDP262LED84-4S740DM33	6132	47.5	129.1	3.209	3.209	2.407	2.407	1.765	1562.5	1172.0	1172.0	859.4
23	BDP262	BDP262LED90-4S740DM33	6570	51.0	128.8	3.446	3.446	2.585	2.585	1.895	1677.9	1258.7	1258.7	922.7
24	BDP262	BDP262LED94-4S740DM33	6862	53.0	129.5	3.581	3.581	2.686	2.686	1.97	1743.7	1307.9	1307.9	959.2

25	BDP262	BDP262LED100-4S740DM33	7200	57.0	126.3	3.851	3.851	2.888	2.888	2.118	1875.1	1406.2	1406.2	1031.3
26	BDP262	BDP262LED8-4S730DM33	608	6.0	101.3	0.405	0.405	0.304	0.304	0.223	197.2	148.0	148.0	108.6
27	BDP262	BDP262LED10-4S730DM33	760	7.2	105.6	0.486	0.486	0.364	0.364	0.267	236.6	177.2	177.2	130.0
28	BDP262	BDP262LED12-4S730DM33	912	8.2	111.2	0.554	0.554	0.416	0.416	0.305	269.8	202.6	202.6	148.5
29	BDP262	BDP262LED14-4S730DM33	1064	9.4	113.2	0.635	0.635	0.476	0.476	0.349	309.2	231.8	231.8	169.9
30	BDP262	BDP262LED16-4S730DM33	1216	10.6	114.7	0.716	0.716	0.537	0.537	0.394	348.6	261.5	261.5	191.8
31	BDP262	BDP262LED18-4S730DM33	1368	11.8	115.9	0.797	0.797	0.598	0.598	0.438	388.1	291.2	291.2	213.3
32	BDP262	BDP262LED20-4S730DM33	1520	13.0	116.9	0.878	0.878	0.658	0.658	0.483	427.5	320.4	320.4	235.2
33	BDP262	BDP262LED22-4S730DM33	1672	14.2	117.7	0.959	0.959	0.719	0.719	0.527	467.0	350.1	350.1	256.6
34	BDP262	BDP262LED24-4S730DM33	1800	15.6	115.4	1.054	1.054	0.79	0.79	0.58	513.2	384.7	384.7	282.4
35	BDP262	BDP262LED27-4S730DM33	2025	17.6	115.1	1.189	1.189	0.892	0.892	0.654	578.9	434.3	434.3	318.4
36	BDP262	BDP262LED30-4S730DM33	2250	19.8	113.6	1.338	1.338	1.004	1.004	0.736	651.5	488.9	488.9	358.4
37	BDP262	BDP262LED35-4S730DM33	2625	23.5	111.7	1.588	1.588	1.191	1.191	0.873	773.2	579.9	579.9	425.1
38	BDP262	BDP262LED39-4S730DM33	2886	24.5	117.8	1.655	1.655	1.241	1.241	0.91	805.9	604.3	604.3	443.1

39	BDP262	BDP262LED45-4S730DM33	3330	28.5	116.8	1.926	1.926	1.444	1.444	1.059	937.8	703.1	703.1	515.6
40	BDP262	BDP262LED50-4S730DM33	3700	32.0	115.6	2.162	2.162	1.621	1.621	1.189	1052.7	789.3	789.3	578.9
41	BDP262	BDP262LED55-4S730DM33	4144	35.5	116.7	2.399	2.399	1.799	1.799	1.319	1168.1	876.0	876.0	642.2
42	BDP262	BDP262LED59-4S730DM33	4440	38.5	115.3	2.601	2.601	1.951	1.951	1.431	1266.5	950.0	950.0	696.8
43	BDP262	BDP262LED64-4S730DM33	4736	38.0	124.6	2.568	2.568	1.926	1.926	1.412	1250.4	937.8	937.8	687.5
44	BDP262	BDP262LED69-4S730DM33	5180	41.0	126.3	2.77	2.77	2.078	2.078	1.524	1348.8	1011.8	1011.8	742.1
45	BDP262	BDP262LED74-4S730DM33	5476	44.0	124.5	2.973	2.973	2.23	2.23	1.635	1447.6	1085.8	1085.8	796.1
46	BDP262	BDP262LED79-4S730DM33	5840	47.5	122.9	3.209	3.209	2.407	2.407	1.765	1562.5	1172.0	1172.0	859.4
47	BDP262	BDP262LED84-4S730DM33	6132	51.0	120.2	3.446	3.446	2.585	2.585	1.895	1677.9	1258.7	1258.7	922.7
48	BDP262	BDP262LED90-4S730DM33	6570	54.0	121.7	3.649	3.649	2.737	2.737	2.007	1776.8	1332.7	1332.7	977.2
49	BDP262	BDP262LED94-4S730DM33	6768	57.0	118.7	3.851	3.851	2.888	2.888	2.118	1875.1	1406.2	1406.2	1031.3
50	BDP262	BDP262LED100-4S730DM33	7200	61.0	118.0	4.122	4.122	3.091	3.091	2.267	2007.1	1505.1	1505.1	1103.8
51	BDP262	BDP262LED7-4S727DM33	532	5.9	90.2	0.399	0.399	0.299	0.299	0.219	194.3	145.6	145.6	106.6
52	BDP262	BDP262LED9-4S727DM33	684	7.2	95.0	0.486	0.486	0.364	0.364	0.267	236.6	177.2	177.2	130.0

53	BDP262	BDP262LED11-4S727DM33	836	8.4	99.5	0.568	0.568	0.426	0.426	0.312	276.6	207.4	207.4	151.9
54	BDP262	BDP262LED13-4S727DM33	988	9.7	101.9	0.655	0.655	0.491	0.491	0.36	318.9	239.1	239.1	175.3
55	BDP262	BDP262LED14-4S727DM33	1064	10.4	102.3	0.703	0.703	0.527	0.527	0.387	342.3	256.6	256.6	188.4
56	BDP262	BDP262LED16-4S727DM33	1216	11.8	103.1	0.797	0.797	0.598	0.598	0.438	388.1	291.2	291.2	213.3
57	BDP262	BDP262LED18-4S727DM33	1368	13.2	103.6	0.892	0.892	0.669	0.669	0.491	434.3	325.7	325.7	239.1
58	BDP262	BDP262LED20-4S727DM33	1500	14.6	102.7	0.986	0.986	0.74	0.74	0.542	480.1	360.3	360.3	263.9
59	BDP262	BDP262LED22-4S727DM33	1650	16.0	103.1	1.081	1.081	0.811	0.811	0.595	526.4	394.9	394.9	289.7
60	BDP262	BDP262LED24-4S727DM33	1800	17.6	102.3	1.189	1.189	0.892	0.892	0.654	578.9	434.3	434.3	318.4
61	BDP262	BDP262LED27-4S727DM33	2025	20.0	101.2	1.351	1.351	1.013	1.013	0.743	657.8	493.2	493.2	361.8
62	BDP262	BDP262LED30-4S727DM33	2250	22.5	100.0	1.52	1.52	1.14	1.14	0.836	740.1	555.1	555.1	407.1
63	BDP262	BDP262LED35-4S727DM33	2625	26.5	99.1	1.791	1.791	1.343	1.343	0.985	872.1	653.9	653.9	479.6
64	BDP262	BDP262LED39-4S727DM33	2886	27.5	104.9	1.858	1.858	1.393	1.393	1.022	904.7	678.3	678.3	497.6
65	BDP262	BDP262LED45-4S727DM33	3330	32.0	104.1	2.162	2.162	1.621	1.621	1.189	1052.7	789.3	789.3	578.9
66	BDP262	BDP262LED50-4S727DM33	3700	36.0	102.8	2.432	2.432	1.824	1.824	1.338	1184.2	888.1	888.1	651.5

67	BDP262	BDP262LED55-4S727DM33	4088	40.5	100.9	2.736	2.736	2.052	2.052	1.505	1332.2	999.2	999.2	732.8
68	BDP262	BDP262LED59-4S727DM33	4440	39.5	112.4	2.669	2.669	2.002	2.002	1.468	1299.6	974.8	974.8	714.8
69	BDP262	BDP262LED64-4S727DM33	4736	42.5	111.4	2.872	2.872	2.154	2.154	1.58	1398.4	1048.8	1048.8	769.3
70	BDP262	BDP262LED69-4S727DM33	5180	46.5	111.4	3.142	3.142	2.357	2.357	1.728	1529.9	1147.7	1147.7	841.4
71	BDP262	BDP262LED74-4S727DM33	5402	50.0	108.0	3.378	3.378	2.534	2.534	1.858	1644.8	1233.9	1233.9	904.7
72	BDP262	BDP262LED79-4S727DM33	5840	53.0	110.2	3.581	3.581	2.686	2.686	1.97	1743.7	1307.9	1307.9	959.2
73	BDP262	BDP262LED84-4S727DM33	6048	57.0	106.1	3.851	3.851	2.888	2.888	2.118	1875.1	1406.2	1406.2	1031.3
74	BDP262	BDP262LED90-4S727DM33	6480	62.0	104.5	4.189	4.189	3.142	3.142	2.304	2039.7	1529.9	1529.9	1121.9
75	BDP262	BDP262LED94-4S727DM33	6768	65.0	104.1	4.392	4.392	3.294	3.294	2.416	2138.6	1603.9	1603.9	1176.4
76	BDP262	BDP262LED100-4S727DM33	7100	69.0	102.9	4.662	4.662	3.497	3.497	2.564	2270.0	1702.8	1702.8	1248.5
77	BDP262	BDP262LED7-4S722DM33	532	6.5	81.8	0.439	0.439	0.329	0.329	0.241	213.8	160.2	160.2	117.3
78	BDP262	BDP262LED9-4S722DM33	684	7.8	87.7	0.527	0.527	0.395	0.395	0.29	256.6	192.3	192.3	141.2
79	BDP262	BDP262LED11-4S722DM33	836	9.2	90.9	0.622	0.622	0.467	0.467	0.342	302.9	227.4	227.4	166.5
80	BDP262	BDP262LED12-4S722DM33	912	10.0	91.2	0.676	0.676	0.507	0.507	0.372	329.2	246.9	246.9	181.1

81	BDP262	BDP262LED14-4S722DM33	1064	11.6	91.7	0.784	0.784	0.588	0.588	0.431	381.7	286.3	286.3	209.9
82	BDP262	BDP262LED16-4S722DM33	1216	13.0	93.5	0.878	0.878	0.658	0.658	0.483	427.5	320.4	320.4	235.2
83	BDP262	BDP262LED18-4S722DM33	1350	14.6	92.5	0.986	0.986	0.74	0.74	0.542	480.1	360.3	360.3	263.9
84	BDP262	BDP262LED20-4S722DM33	1500	16.4	91.5	1.108	1.108	0.831	0.831	0.609	539.5	404.6	404.6	296.5
85	BDP262	BDP262LED22-4S722DM33	1650	18.0	91.7	1.216	1.216	0.912	0.912	0.669	592.1	444.1	444.1	325.7
86	BDP262	BDP262LED24-4S722DM33	1800	19.8	90.9	1.338	1.338	1.004	1.004	0.736	651.5	488.9	488.9	358.4
87	BDP262	BDP262LED27-4S722DM33	2025	22.5	90.0	1.52	1.52	1.14	1.14	0.836	740.1	555.1	555.1	407.1
88	BDP262	BDP262LED30-4S722DM33	2250	25.5	88.2	1.723	1.723	1.292	1.292	0.948	839.0	629.1	629.1	461.6
89	BDP262	BDP262LED35-4S722DM33	2590	27.5	94.2	1.858	1.858	1.393	1.393	1.022	904.7	678.3	678.3	497.6
90	BDP262	BDP262LED39-4S722DM33	2886	31.0	93.1	2.095	2.095	1.571	1.571	1.152	1020.1	765.0	765.0	560.9
91	BDP262	BDP262LED45-4S722DM33	3330	36.5	91.2	2.466	2.466	1.85	1.85	1.356	1200.7	900.8	900.8	660.3
92	BDP262	BDP262LED50-4S722DM33	3700	37.0	100.0	2.5	2.5	1.875	1.875	1.375	1217.3	913.0	913.0	669.5
93	BDP262	BDP262LED55-4S722DM33	3996	41.0	97.5	2.77	2.77	2.078	2.078	1.524	1348.8	1011.8	1011.8	742.1
94	BDP262	BDP262LED59-4S722DM33	4440	44.0	100.9	2.973	2.973	2.23	2.23	1.635	1447.6	1085.8	1085.8	796.1

95	BDP262	BDP262LED64-4S722DM33	4672	48.0	97.3	3.243	3.243	2.432	2.432	1.784	1579.1	1184.2	1184.2	868.7
96	BDP262	BDP262LED69-4S722DM33	5110	52.0	98.3	3.514	3.514	2.635	2.635	1.933	1711.0	1283.0	1283.0	941.2
97	BDP262	BDP262LED74-4S722DM33	5402	56.0	96.5	3.784	3.784	2.838	2.838	2.081	1842.5	1381.9	1381.9	1013.3
98	BDP262	BDP262LED8-4S840DM33	608	6.4	95.0	0.432	0.432	0.324	0.324	0.238	210.3	157.8	157.8	115.9
99	BDP262	BDP262LED10-4S840DM33	760	7.6	100.0	0.514	0.514	0.386	0.386	0.283	250.3	188.0	188.0	137.8
100	BDP262	BDP262LED12-4S840DM33	912	8.8	103.6	0.595	0.595	0.446	0.446	0.327	289.7	217.2	217.2	159.2

PEP ECOPASSPORT ALIGNED

This section represents the scaling method for the **B6 module**, following the PEP EcoPassport PSR for luminaries (PSR-0014-ed2.0-EN-2023 07 13). The GWP results were scaled from a reference variant of a product family, based on various light management functions, the lumen output (O_{lum}) and reference service life (RSL) of each product within the same product family.

To calculate the Scaled Impact (SI_{pep}), we have followed the below methods:

1. Calculate the power scaling factor (PSF), which is the ratio of the power input of the variant in questions P_{in} and the power input of the base variant P_{base} .

$$PSF = \frac{P_{in}}{P_{base}}$$

2. Using this scaled GWP, we then can apply the PEP Ecopassport method for calculating the environmental impact of the functional unit for a luminary (1000 lumens over 35000 hours), applied to B6, where the Functional Unit application considers the lumen output (O_{lum}) and reference service lifetime (RSL) of the product to estimate the final environmental impact. The scaled impact (SI_{pep}) is presented in Table A4.

$$GSF = \frac{FU_{pep}}{FU_p} = \frac{1,000}{O_{lum}} * \frac{35,000}{RSL}$$

3. Calculate the GWP scaling factor ($PGSF$), by multiplying the PSF by the GSF.

$$PGSF = PSF * GSF$$

4. Calculate the Total Scaling factor by multiplying the PSF by the control scaling factor (CSF), where the CSF is determined according the relevant control factor scenario (e.g. if the luminaire has a presence detection system), as presented in Table A1.

$$TSF = PGSF * CSF$$

Table 3: Light management functions (PEP EcoPassport aligned)

Scenario	Abbrev.	CSF
No control	NC	1
Daylight dependency factor	DD	0.75
Presence sensing	PS	0.75
Daylight dependency and presence sensing	DD+PS	0.55

5. Lastly, the GWP of the base variant is then scaled by the TSF.

$$Scaled\ GWP = GWP_{case} * TSF$$

Table 4: Impact per scaling factor (PEP EcoPassport aligned)

	12NC or Product Family Code	Description	Flux [lm]	Power [W]	Efficacy [lm/W]	PSF	Total Scaling Factor (TSF)				Scaled Impacts (GWP100 B6 - kg CO2eq.)			
							NC	DD	PS	DD+PS	NC	DD	PS	DD+PS
1	BDP262	BDP262LED8-4S740DM33	608	5.7	106.7	0.385	0.222	0.167	0.167	0.122	108.1	81.3	81.3	59.4
2	BDP262	BDP262LED10-4S740DM33	760	6.9	110.1	0.466	0.215	0.161	0.161	0.118	104.7	78.4	78.4	57.5
3	BDP262	BDP262LED12-4S740DM33	912	7.9	115.4	0.534	0.205	0.154	0.154	0.113	99.8	75.0	75.0	55.0
4	BDP262	BDP262LED14-4S740DM33	1064	8.9	119.6	0.601	0.198	0.149	0.149	0.109	96.4	72.6	72.6	53.1
5	BDP262	BDP262LED16-4S740DM33	1216	10.0	121.6	0.676	0.195	0.146	0.146	0.107	94.9	71.1	71.1	52.1
6	BDP262	BDP262LED18-4S740DM33	1368	11.2	122.1	0.757	0.194	0.146	0.146	0.107	94.5	71.1	71.1	52.1
7	BDP262	BDP262LED20-4S740DM33	1520	12.4	122.6	0.838	0.193	0.145	0.145	0.106	94.0	70.6	70.6	51.6
8	BDP262	BDP262LED22-4S740DM33	1672	13.4	124.8	0.905	0.189	0.142	0.142	0.104	92.0	69.1	69.1	50.6
9	BDP262	BDP262LED24-4S740DM33	1800	14.8	121.6	1.0	0.194	0.146	0.146	0.107	94.5	71.1	71.1	52.1
10	BDP262	BDP262LED27-4S740DM33	2025	16.6	122.0	1.122	0.194	0.146	0.146	0.107	94.5	71.1	71.1	52.1
11	BDP262	BDP262LED30-4S740DM33	2250	18.6	121.0	1.257	0.196	0.147	0.147	0.108	95.4	71.6	71.6	52.6
12	BDP262	BDP262LED35-4S740DM33	2625	22.0	119.3	1.486	0.198	0.149	0.149	0.109	96.4	72.6	72.6	53.1

13	BDP262	BDP262LED39-4S740DM33	2886	23.0	125.5	1.554	0.188	0.141	0.141	0.103	91.5	68.7	68.7	50.2
14	BDP262	BDP262LED45-4S740DM33	3330	27.0	123.3	1.824	0.192	0.144	0.144	0.106	93.5	70.1	70.1	51.6
15	BDP262	BDP262LED50-4S740DM33	3700	30.0	123.3	2.027	0.193	0.145	0.145	0.106	94.0	70.6	70.6	51.6
16	BDP262	BDP262LED55-4S740DM33	4144	33.0	125.6	2.23	0.187	0.14	0.14	0.103	91.1	68.2	68.2	50.2
17	BDP262	BDP262LED59-4S740DM33	4440	36.0	123.3	2.432	0.192	0.144	0.144	0.106	93.5	70.1	70.1	51.6
18	BDP262	BDP262LED64-4S740DM33	4736	39.5	119.9	2.669	0.198	0.149	0.149	0.109	96.4	72.6	72.6	53.1
19	BDP262	BDP262LED69-4S740DM33	5180	38.5	134.5	2.601	0.177	0.133	0.133	0.097	86.2	64.8	64.8	47.2
20	BDP262	BDP262LED74-4S740DM33	5476	41.5	132.0	2.804	0.179	0.134	0.134	0.098	87.2	65.2	65.2	47.7
21	BDP262	BDP262LED79-4S740DM33	5772	44.5	129.7	3.007	0.183	0.137	0.137	0.101	89.1	66.7	66.7	49.2
22	BDP262	BDP262LED84-4S740DM33	6132	47.5	129.1	3.209	0.183	0.137	0.137	0.101	89.1	66.7	66.7	49.2
23	BDP262	BDP262LED90-4S740DM33	6570	51.0	128.8	3.446	0.183	0.137	0.137	0.101	89.1	66.7	66.7	49.2
24	BDP262	BDP262LED94-4S740DM33	6862	53.0	129.5	3.581	0.183	0.137	0.137	0.101	89.1	66.7	66.7	49.2
25	BDP262	BDP262LED100-4S740DM33	7200	57.0	126.3	3.851	0.189	0.142	0.142	0.104	92.0	69.1	69.1	50.6
26	BDP262	BDP262LED8-4S730DM33	608	6.0	101.3	0.405	0.233	0.175	0.175	0.128	113.5	85.2	85.2	62.3

27	BDP262	BDP262LED10-4S730DM33	760	7.2	105.6	0.486	0.224	0.168	0.168	0.123	109.1	81.8	81.8	59.9
28	BDP262	BDP262LED12-4S730DM33	912	8.2	111.2	0.554	0.213	0.16	0.16	0.117	103.7	77.9	77.9	57.0
29	BDP262	BDP262LED14-4S730DM33	1064	9.4	113.2	0.635	0.209	0.157	0.157	0.115	101.8	76.4	76.4	56.0
30	BDP262	BDP262LED16-4S730DM33	1216	10.6	114.7	0.716	0.206	0.154	0.154	0.113	100.3	75.0	75.0	55.0
31	BDP262	BDP262LED18-4S730DM33	1368	11.8	115.9	0.797	0.204	0.153	0.153	0.112	99.3	74.5	74.5	54.5
32	BDP262	BDP262LED20-4S730DM33	1520	13.0	116.9	0.878	0.202	0.152	0.152	0.111	98.4	74.0	74.0	54.0
33	BDP262	BDP262LED22-4S730DM33	1672	14.2	117.7	0.959	0.2	0.15	0.15	0.11	97.4	73.0	73.0	53.6
34	BDP262	BDP262LED24-4S730DM33	1800	15.6	115.4	1.054	0.204	0.153	0.153	0.112	99.3	74.5	74.5	54.5
35	BDP262	BDP262LED27-4S730DM33	2025	17.6	115.1	1.189	0.206	0.154	0.154	0.113	100.3	75.0	75.0	55.0
36	BDP262	BDP262LED30-4S730DM33	2250	19.8	113.6	1.338	0.209	0.157	0.157	0.115	101.8	76.4	76.4	56.0
37	BDP262	BDP262LED35-4S730DM33	2625	23.5	111.7	1.588	0.211	0.158	0.158	0.116	102.7	76.9	76.9	56.5
38	BDP262	BDP262LED39-4S730DM33	2886	24.5	117.8	1.655	0.2	0.15	0.15	0.11	97.4	73.0	73.0	53.6
39	BDP262	BDP262LED45-4S730DM33	3330	28.5	116.8	1.926	0.202	0.152	0.152	0.111	98.4	74.0	74.0	54.0
40	BDP262	BDP262LED50-4S730DM33	3700	32.0	115.6	2.162	0.205	0.154	0.154	0.113	99.8	75.0	75.0	55.0

41	BDP262	BDP262LED55-4S730DM33	4144	35.5	116.7	2.399	0.202	0.152	0.152	0.111	98.4	74.0	74.0	54.0
42	BDP262	BDP262LED59-4S730DM33	4440	38.5	115.3	2.601	0.205	0.154	0.154	0.113	99.8	75.0	75.0	55.0
43	BDP262	BDP262LED64-4S730DM33	4736	38.0	124.6	2.568	0.19	0.143	0.143	0.105	92.5	69.6	69.6	51.1
44	BDP262	BDP262LED69-4S730DM33	5180	41.0	126.3	2.77	0.188	0.141	0.141	0.103	91.5	68.7	68.7	50.2
45	BDP262	BDP262LED74-4S730DM33	5476	44.0	124.5	2.973	0.19	0.143	0.143	0.105	92.5	69.6	69.6	51.1
46	BDP262	BDP262LED79-4S730DM33	5840	47.5	122.9	3.209	0.193	0.145	0.145	0.106	94.0	70.6	70.6	51.6
47	BDP262	BDP262LED84-4S730DM33	6132	51.0	120.2	3.446	0.196	0.147	0.147	0.108	95.4	71.6	71.6	52.6
48	BDP262	BDP262LED90-4S730DM33	6570	54.0	121.7	3.649	0.193	0.145	0.145	0.106	94.0	70.6	70.6	51.6
49	BDP262	BDP262LED94-4S730DM33	6768	57.0	118.7	3.851	0.2	0.15	0.15	0.11	97.4	73.0	73.0	53.6
50	BDP262	BDP262LED100-4S730DM33	7200	61.0	118.0	4.122	0.202	0.152	0.152	0.111	98.4	74.0	74.0	54.0
51	BDP262	BDP262LED7-4S727DM33	532	5.9	90.2	0.399	0.263	0.197	0.197	0.145	128.1	95.9	95.9	70.6
52	BDP262	BDP262LED9-4S727DM33	684	7.2	95.0	0.486	0.249	0.187	0.187	0.137	121.2	91.1	91.1	66.7
53	BDP262	BDP262LED11-4S727DM33	836	8.4	99.5	0.568	0.238	0.178	0.178	0.131	115.9	86.7	86.7	63.8
54	BDP262	BDP262LED13-4S727DM33	988	9.7	101.9	0.655	0.232	0.174	0.174	0.128	113.0	84.7	84.7	62.3

55	BDP262	BDP262LED14-4S727DM33	1064	10.4	102.3	0.703	0.231	0.173	0.173	0.127	112.5	84.2	84.2	61.8
56	BDP262	BDP262LED16-4S727DM33	1216	11.8	103.1	0.797	0.23	0.173	0.173	0.127	112.0	84.2	84.2	61.8
57	BDP262	BDP262LED18-4S727DM33	1368	13.2	103.6	0.892	0.228	0.171	0.171	0.125	111.0	83.3	83.3	60.9
58	BDP262	BDP262LED20-4S727DM33	1500	14.6	102.7	0.986	0.23	0.173	0.173	0.127	112.0	84.2	84.2	61.8
59	BDP262	BDP262LED22-4S727DM33	1650	16.0	103.1	1.081	0.229	0.172	0.172	0.126	111.5	83.8	83.8	61.4
60	BDP262	BDP262LED24-4S727DM33	1800	17.6	102.3	1.189	0.231	0.173	0.173	0.127	112.5	84.2	84.2	61.8
61	BDP262	BDP262LED27-4S727DM33	2025	20.0	101.2	1.351	0.234	0.176	0.176	0.129	113.9	85.7	85.7	62.8
62	BDP262	BDP262LED30-4S727DM33	2250	22.5	100.0	1.52	0.237	0.178	0.178	0.13	115.4	86.7	86.7	63.3
63	BDP262	BDP262LED35-4S727DM33	2625	26.5	99.1	1.791	0.238	0.178	0.178	0.131	115.9	86.7	86.7	63.8
64	BDP262	BDP262LED39-4S727DM33	2886	27.5	104.9	1.858	0.225	0.169	0.169	0.124	109.6	82.3	82.3	60.4
65	BDP262	BDP262LED45-4S727DM33	3330	32.0	104.1	2.162	0.227	0.17	0.17	0.125	110.5	82.8	82.8	60.9
66	BDP262	BDP262LED50-4S727DM33	3700	36.0	102.8	2.432	0.231	0.173	0.173	0.127	112.5	84.2	84.2	61.8
67	BDP262	BDP262LED55-4S727DM33	4088	40.5	100.9	2.736	0.235	0.176	0.176	0.129	114.4	85.7	85.7	62.8
68	BDP262	BDP262LED59-4S727DM33	4440	39.5	112.4	2.669	0.211	0.158	0.158	0.116	102.7	76.9	76.9	56.5

69	BDP262	BDP262LED64-4S727DM33	4736	42.5	111.4	2.872	0.213	0.16	0.16	0.117	103.7	77.9	77.9	57.0
70	BDP262	BDP262LED69-4S727DM33	5180	46.5	111.4	3.142	0.214	0.161	0.161	0.118	104.2	78.4	78.4	57.5
71	BDP262	BDP262LED74-4S727DM33	5402	50.0	108.0	3.378	0.22	0.165	0.165	0.121	107.1	80.3	80.3	58.9
72	BDP262	BDP262LED79-4S727DM33	5840	53.0	110.2	3.581	0.215	0.161	0.161	0.118	104.7	78.4	78.4	57.5
73	BDP262	BDP262LED84-4S727DM33	6048	57.0	106.1	3.851	0.223	0.167	0.167	0.123	108.6	81.3	81.3	59.9
74	BDP262	BDP262LED90-4S727DM33	6480	62.0	104.5	4.189	0.226	0.17	0.17	0.124	110.0	82.8	82.8	60.4
75	BDP262	BDP262LED94-4S727DM33	6768	65.0	104.1	4.392	0.228	0.171	0.171	0.125	111.0	83.3	83.3	60.9
76	BDP262	BDP262LED100-4S727DM33	7100	69.0	102.9	4.662	0.228	0.171	0.171	0.125	111.0	83.3	83.3	60.9
77	BDP262	BDP262LED7-4S722DM33	532	6.5	81.8	0.439	0.289	0.217	0.217	0.159	140.7	105.7	105.7	77.4
78	BDP262	BDP262LED9-4S722DM33	684	7.8	87.7	0.527	0.27	0.203	0.203	0.149	131.5	98.8	98.8	72.6
79	BDP262	BDP262LED11-4S722DM33	836	9.2	90.9	0.622	0.261	0.196	0.196	0.144	127.1	95.4	95.4	70.1
80	BDP262	BDP262LED12-4S722DM33	912	10.0	91.2	0.676	0.26	0.195	0.195	0.143	126.6	94.9	94.9	69.6
81	BDP262	BDP262LED14-4S722DM33	1064	11.6	91.7	0.784	0.258	0.194	0.194	0.142	125.6	94.5	94.5	69.1
82	BDP262	BDP262LED16-4S722DM33	1216	13.0	93.5	0.878	0.253	0.19	0.19	0.139	123.2	92.5	92.5	67.7

83	BDP262	BDP262LED18-4S722DM33	1350	14.6	92.5	0.986	0.255	0.191	0.191	0.14	124.2	93.0	93.0	68.2
84	BDP262	BDP262LED20-4S722DM33	1500	16.4	91.5	1.108	0.258	0.194	0.194	0.142	125.6	94.5	94.5	69.1
85	BDP262	BDP262LED22-4S722DM33	1650	18.0	91.7	1.216	0.258	0.194	0.194	0.142	125.6	94.5	94.5	69.1
86	BDP262	BDP262LED24-4S722DM33	1800	19.8	90.9	1.338	0.26	0.195	0.195	0.143	126.6	94.9	94.9	69.6
87	BDP262	BDP262LED27-4S722DM33	2025	22.5	90.0	1.52	0.263	0.197	0.197	0.145	128.1	95.9	95.9	70.6
88	BDP262	BDP262LED30-4S722DM33	2250	25.5	88.2	1.723	0.269	0.202	0.202	0.148	131.0	98.4	98.4	72.1
89	BDP262	BDP262LED35-4S722DM33	2590	27.5	94.2	1.858	0.251	0.188	0.188	0.138	122.2	91.5	91.5	67.2
90	BDP262	BDP262LED39-4S722DM33	2886	31.0	93.1	2.095	0.253	0.19	0.19	0.139	123.2	92.5	92.5	67.7
91	BDP262	BDP262LED45-4S722DM33	3330	36.5	91.2	2.466	0.259	0.194	0.194	0.142	126.1	94.5	94.5	69.1
92	BDP262	BDP262LED50-4S722DM33	3700	37.0	100.0	2.5	0.237	0.178	0.178	0.13	115.4	86.7	86.7	63.3
93	BDP262	BDP262LED55-4S722DM33	3996	41.0	97.5	2.77	0.244	0.183	0.183	0.134	118.8	89.1	89.1	65.2
94	BDP262	BDP262LED59-4S722DM33	4440	44.0	100.9	2.973	0.235	0.176	0.176	0.129	114.4	85.7	85.7	62.8
95	BDP262	BDP262LED64-4S722DM33	4672	48.0	97.3	3.243	0.243	0.182	0.182	0.134	118.3	88.6	88.6	65.2
96	BDP262	BDP262LED69-4S722DM33	5110	52.0	98.3	3.514	0.239	0.179	0.179	0.131	116.4	87.2	87.2	63.8

97	BDP262	BDP262LED74-4S722DM33	5402	56.0	96.5	3.784	0.246	0.184	0.184	0.135	119.8	89.6	89.6	65.7
98	BDP262	BDP262LED8-4S840DM33	608	6.4	95.0	0.432	0.249	0.187	0.187	0.137	121.2	91.1	91.1	66.7
99	BDP262	BDP262LED10-4S840DM33	760	7.6	100.0	0.514	0.237	0.178	0.178	0.13	115.4	86.7	86.7	63.3
100	BDP262	BDP262LED12-4S840DM33	912	8.8	103.6	0.595	0.228	0.171	0.171	0.125	111.0	83.3	83.3	60.9