

Data Sheet | Item Number: 713-1404/117-000


THR male header, 2-row; 0.8 x 0.8 mm solder pin; straight; 100% protected against mismatching; Threaded flange; Pin spacing 3.5 mm; 8-pole; black

<https://www.wago.com/713-1404/117-000>



Color: ■ black

Similar to illustration

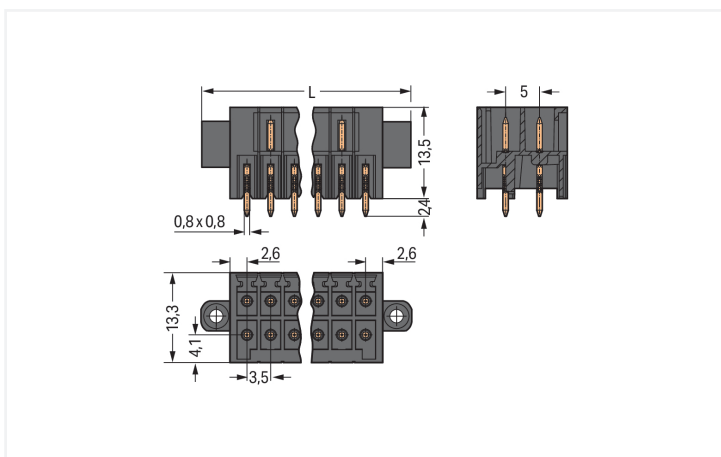

Dimensions in mm

$L = [(pole\ no./2) - 1] \times pin\ spacing + 13.6\ mm$



Male connector, 713 Series, solder pin dimensions 0.8 x 0.8 mm

Our male connector (item number 713-1404/117-000) simplifies electrical installations. The item's dimensions are (24.1 x 15.9 x 13.3) mm (width x height x depth).

Tin is used for coating the contact surfaces. THR is used to assemble the pcb connector.

Notes

Safety Information

The MCS – MULTI CONNECTION SYSTEM includes connectors without breaking capacity in accordance with DIN EN 61984. When used as intended, these connectors must not be connected/disconnected when live or under load. When used as intended, these connectors must not be connected/disconnected when live or under load. The circuit design should ensure header pins, which can be touched, are not live when unmated.

Variants:

Other pole numbers
Other solder pin lengths
Gold-plated or partially gold-plated contact surfaces
Other versions (or variants) can be requested from WAGO Sales or configured at <https://configurator.wago.com/>.

Electrical data

Ratings per	IEC/EN 60664-1			Approvals per	UL 1059		
Overvoltage category	III	III	II	Use group	B	C	D
Pollution degree	3	2	2	Rated voltage	150 V	50 V	-
Nominal voltage	80 V	160 V	250 V	Rated current	10 A	10 A	-
Rated impulse withstand voltage	2.5 kV	2.5 kV	2.5 kV				
Rated current	10 A	10 A	10 A				

Approvals per	CSA		
Use group	B	C	D
Rated voltage	150 V	-	-
Rated current	12 A	-	-

Connection Data

Total number of potentials	8	Connection 1	
Number of connection types	1	Pole number	8
Number of levels	2		

Physical data

Pin spacing	3.5 mm / 0.138 inches
Width	24.1 mm / 0.949 inches
Height	15.9 mm / 0.626 inches
Height from the surface	13.5 mm / 0.531 inches
Depth	13.3 mm / 0.524 inches
Solder pin length	2.4 mm
Solder pin dimensions	0.8 x 0.8 mm
Plated through-hole diameter (THR)	1.3 ^(+0.1) mm

Mechanical data

Variable coding	Yes
Anti-rotation protection	Yes

Plug-in connection

Contact type (pluggable connector)	Male connector/plug
Connector (connection type)	for PCB
Mismating protection	Yes
Mating direction to the PCB	90 °
Locking of plug-in connection	Threaded flange

PCB contact

PCB contact	THR
Solder pin arrangement	over the entire male connector (in-line)
Number of solder pins per potential	1

Material data

Note (material data)	Information on material specifications can be found here
Color	black
Material group	I
Insulation material (main housing)	Polyphthalamide (PPA GF)
Flammability class per UL94	V0
Contact material	Electrolytic copper (E _{Cu})
Contact Plating	Tin
Fire load	0.057 MJ
Weight	2.8 g
MSL per J-STD 020D	1

Environmental requirements

Limit temperature range	-60 ... +100 °C
Processing temperature	-35 ... +60 °C

Commercial data

Product Group	3 (Multi Conn. System)
PU (SPU)	50 pcs
Packaging type	Box
Country of origin	PL
GTIN	4050821156413
Customs tariff number	85366930000

Product Classification

UNSPSC	39121409
eCl@ss 10.0	27-44-04-02
eCl@ss 9.0	27-44-04-02
ETIM 9.0	EC002637
ETIM 10.0	EC002637
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	e5184afa-f058-489b-9bdf-76fc21cff75f
SCIP notification number (Belgium)	5650a77f-5acb-4629-9240-8ddf4e930e7a
SCIP notification number (Bulgaria)	bafdaa24-aec9-4a2c-a6fe-9d71854b43a9
SCIP notification number (Czech Republic)	c7f85fc7-81f9-4d1f-bc5b-027d523131e7
SCIP notification number (Denmark)	284d1a0d-0746-46a6-9b71-279d58c03e82
SCIP notification number (Finland)	3a9945c5-c5d9-431c-8af9-1d2e10bd26ec
SCIP notification number (France)	60d7d999-3851-45c4-99ca-d55aa7af218e
SCIP notification number (Germany)	e25bba62-705a-4701-ad80-f4d3ee528972
SCIP notification number (Hungary)	0647d9e4-eb33-4d34-8a70-b39d09a7e223
SCIP notification number (Italy)	6c61aad5-c395-49af-b3c5-0c9d8aa19860
SCIP notification number (Netherlands)	e0de7ec5-43a1-45f6-8036-7753995131f5
SCIP notification number (Poland)	e1e2435a-9cd6-43c3-a856-a368b10ec114
SCIP notification number (Romania)	655ac106-920e-4374-bc6e-032bf4e8ac8f
SCIP notification number (Sweden)	06ed6d3a-ce97-43f3-9241-bfde2d215280

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
CB DEKRA Certification B.V.	IEC 61984	NL-102427
CSA CSA Group	C22.2	2315087
KEMA/KEUR DEKRA Certification B.V.	EN 61984	71-133740

Downloads

Environmental Product Compliance



Compliance Search

Environmental Product
Compliance
713-1404/117-000



Documentation

Additional Information

Technical Section	03.04.2019	pdf 2027.26 KB	
		pdf 535.32 KB	

CAD/CAE-Data

CAD data

2D/3D Models
713-1404/117-000



CAE data

ZUKEN Portal
713-1404/117-000



PCB Design

Symbol and Footprint
via SamacSys
713-1404/117-000



Symbol and Footprint
via Ultra Librarian
713-1404/117-000



1 Compatible Products

1.1 System counterpart

1.1.1 Female connector/socket



Item No.: [713-1104/107-000](#)

1-conductor female connector, 2-row; CA-GE CLAMP®; 1.5 mm²; Pin spacing 3.5 mm; 8-pole; 100% protected against mismatching; Screw flange; black

1.2 Optional Accessories

1.2.1 Coding

1.2.1.1 Coding




Item No.: [714-101](#)

Coding key; orange

Installation Notes

Coding



Coding a male header by inserting a coding pin.