


Walraven Britclips® FC ICC

(J0520)

for flange

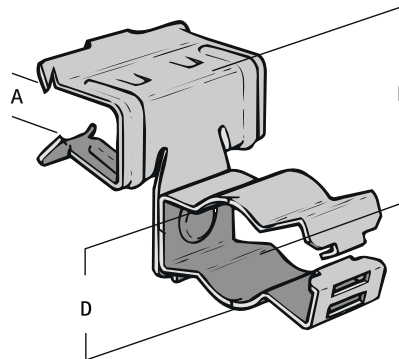

Features & benefits

- for a solid fixing to steel construction without the need for welding or drilling
- suitable for pipe or cable fixing horizontal, vertical or crossed with respect to the flange
- conduit clip swivels 360°
- conduit clip with jaw locking (use pliers to lock)
- material: spring steel (type CS70)
- surface treatment: Delta-Tone 9000 (480 hours)

Product Number	Type	Flange	Diameter	Total Width x Total Height x Maximum Allowed Load Faz Total Depth	
Reference letter		Fl	d	W x H x DtT	Fa,z
Unit description		(mm)	(mm)	(mm) x (mm) x (mm)	(N)
50121709	FC8 LCC17	4-8	11 - 17	38 x 39 x 65	250
50121716	FC14 LCC17	8-14	11 - 17	38 x 45 x 65	250
50121720	FC20 LCC17	14-20	11 - 17	38 x 50 x 65	250
50122404	FC4 LCC24	2-4	18 - 24	28 x 36 x 63	450
50122409	FC8 LCC24	4-8	18 - 24	38 x 42 x 70	450
50122416	FC14 LCC24	8-14	18 - 24	38 x 47 x 70	450
50122420	FC20 LCC24	14-20	18 - 24	38 x 53 x 70	450
50122430	FC28 LCC24	20-28	18 - 24	38 x 58 x 70	450
50122609	FC8 LCC26	4-8	22 - 26	38 x 42 x 70	450
50122616	FC14 LCC26	8-14	22 - 26	38 x 48 x 70	450
50122620	FC20 LCC26	14-20	22 - 26	38 x 53 x 70	450
50122630	FC28 LCC26	20-28	22 - 26	38 x 59 x 70	450
50123209	FC8 LCC32	4-8	30 - 32	38 x 44 x 78	450
50123216	FC14 LCC32	8-14	30 - 32	38 x 50 x 78	450
50123220	FC20 LCC32	14-20	30 - 32	38 x 55 x 78	450
50123230	FC28 LCC32	20-28	30 - 32	38 x 61 x 78	450
50124016	FC14 LCC40	8-14	36 - 40	38 x 58 x 89	450
50124020	FC20 LCC40	14-20	36 - 40	38 x 63 x 89	450
50124030	FC28 LCC40	20-28	36 - 40	38 x 69 x 89	450
EM50122509	FC8 LCC24	4-8	20 - 25	38 x 56.73 x 67.22	450
EM50122516	FC14 LCC24	8-14	20 - 25	38 x 58.49 x 68.85	450
EM50122520	FC20 LCC24	14-20	20 - 25	38 x 66.48 x 69.26	450
EM50122530	FC28 LCC24	20-28	20 - 25	38 x 70.77 x 71.30	450