

Concord

OPTIX LINEAR SURFACE 1200 4000K C9 ALU DALI EM 2023807



Features

- OPTIX LINEAR SURFACE 1200 4000K C9 ALU DALI EM is a high efficacy low glare linear luminaire for office and education applications. Suitable for continuous light line installations with accessories separately available. Surface and suspended mounting. Size: 1160x90x80mm. Aluminised plastic extra low glare optics in a single line configuration. White RAL9016 fixture body. DALI dimmable. 3hr maintained emergency version. 4000K Neutral White LED, CRI>90, chromaticity tolerance of 3-step MacAdam ellipse. Luminous flux 3100lm. Power consumption 30W. Luminaire efficacy 103lm/W. Lifespan: 48,500 hours L90B10. UGR<19, Luminance at 65°<200 Cd/m², IK07, IP20. Ultra Low Flicker: <5% Photobiological safety risk group 1. Electrical protection Class I. Glow wire test 850°C.

Product Overview

Product name	OPTIX LINEAR SURFACE 1200 4000K C9 ALU DALI EM
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting
Fixture rating	Enclosed
General application	Education, Office
ETIM Class	EC002892
Fixture luminous flux (lm)	3100
Luminous flux (lm)	3100
Luminaire efficacy (lm/W)	103
Correlated colour temperature (k)	4000
Light colour	Neutral White


Concord

OPTIX LINEAR SURFACE 1200 4000K C9 ALU DALI EM


2023807

CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Glare control	< 19
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	85
Total power consumption (W)	30
Electrical protection	Class I
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9016
IP rating	IP20
IK rating	IK07
Product EAN number	5025768238071
Warranty	5 years
Dimming method	DALI
Useful luminous flux (#use)	3100

Photometry

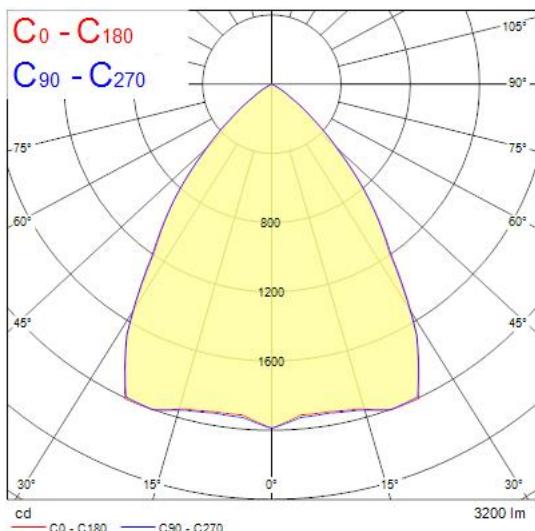

Technical drawings

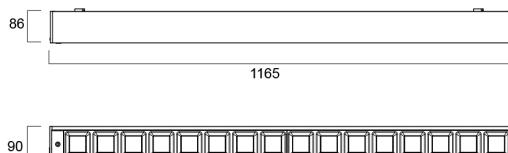

Concord
by SYLVANIA