



## Features

- Compact and elegant design
- Suitable replacement for halogen, incandescent and compact fluorescent lamps
- Instant light at the flick of a switch
- Uniform light distribution
- Good colour rendering (CRI 80)
- Perfect for hotels, restaurants, lobbies, corridors, stairwells, reception areas
- Lower maintenance costs
- 15,000 hours average rated life

## Product Overview


Product name	ToLEDo GLS 806LM 827 E27 SL
Technology	LED
Lamp shape	Pear-shape
Cap/Base	E27
Lamp finish	Opal
Fixture rating	Open
General application	Residential & Consumer
ETIM Class	EC001959
Correlated colour temperature (k)	2700
Light colour	Homelight
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	150
Photobiological Risk Group	RG1
Wattage (W)	8
Power consumption (W)	8
Control gear type	LED driver constant current
Dimmable	No

## ToLEDo GLS 806LM 827 E27 SL 0030838

Housing colour	White
IP rating	IP20
Product EAN number	5410288308388
Warranty	3 years
Dimming method	N/A
Useful luminous flux (#use)	806

### Technical drawings

B22

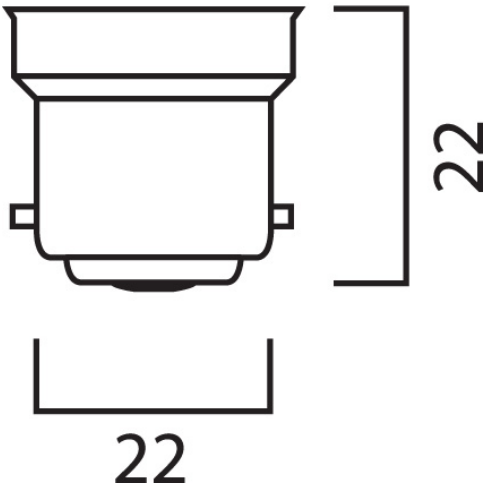

### Data table

#### GENERAL DATA

Product name	ToLEDo GLS 806LM 827 E27 SL
Technology	LED
Lamp shape	Pear-shape
Cap/Base	E27
Lamp finish	Opal
Fixture rating	Open
General application	Residential & Consumer

## ToLEDo GLS 806LM 827 E27 SL 0030838

Operating temperature range (°C)	-20°C...+40°C
ETIM Class	EC001959
Warranty	3 years

### OPTICAL DATA

Useful luminous flux (#use)	806
Correlated colour temperature (k)	2700
Light colour	Homelight
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	150
Photobiological Risk Group	RG1

### ELECTRICAL DATA

Power consumption (W)	8
Wattage (W)	8
Equivalent watt (W)	60
Current (A)	0.06
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Control gear required	No
Control gear type	LED driver constant current
No. Of switching cycles before premature failures	>50000
Dimmable	No
Dimming method	N/A
Inrush Current (A)	6
Inrush Duration (µs)	150
Lamp Energy Label (class)	F
Nominal Frequency (Hz)	50/60Hz

### LIFETIME DATA

Lifespan L70 B50	15000
------------------	-------

## PHYSICAL DATA

Housing colour	White
IP rating	IP20
Nominal Product Height (mm)	107
Nominal Product Diameter (mm)	60
Weight (kg)	0.02

## PACKAGING

Product EAN number	5410288308388
Packaging single length / height (cm)	6.0
Packaging single width (cm)	6.0
Packaging single depth (cm)	11.2
DUN14 (inner)	15410288308385
Units per outer package	6
Packaging outer length / height (cm)	18.8
Packaging outer width (cm)	12.7
Packaging outer depth (cm)	12.5

## SAFETY DATA

Optimal operating condition (°C)	-20-40
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures

# SYLVANIA

ToLEDo GLS 806LM 827 E27 SL  
0030838

## Energy label



0030838



**8**  
kWh/1000h



2019/2015



0030838



**8**  
kWh/1000h



2019/2015