



Features

- Logistics and Industry high bay luminaire with wide optics to provide homogenous light distribution for open space areas. 37000lumens, 212W, 174lm/W, 4000K, CRI80, wide beam optic, SylSmart SSA dimmable without PIR motion detection, 3 step MacAdam ellipse, grey finish (RAL7012), Class 1, 220-240V, IP65, IK06.


Product Overview

|                                   |                               |
|-----------------------------------|-------------------------------|
| Product name                      | KubiXx 4000K 37KLM WIDE SSA N |
| Technology                        | LED                           |
| Cap/Base                          | N/A                           |
| Housing                           | Steel                         |
| Mount                             | Suspended                     |
| Fixture rating                    | Enclosed                      |
| General application               | Logistics & Industry          |
| ETIM Class                        | EC001716                      |
| Fixture luminous flux (lm)        | 37000                         |
| Luminaire efficacy (lm/W)         | 174                           |
| Correlated colour temperature (k) | 4000                          |
| Light colour                      | Neutral White                 |
| CRI (Ra)                          | 80                            |
| Glare control                     | < 23                          |
| Photobiological Risk Group        | RG1                           |
| Total power consumption (W)       | 212                           |
| Electrical protection             | Class I                       |
| Control gear type                 | LED driver constant current   |
| Dimmable                          | Yes                           |

KubiXx 4000K 37KLM WIDE SSA N  
0062169

|                    |               |
|--------------------|---------------|
| Housing colour     | Grey          |
| IP rating          | IP65          |
| IK rating          | IK06          |
| Product EAN number | 5410288621692 |
| Warranty           | 5 years       |
| Dimming method     | SylSmart SSA  |

Photometry

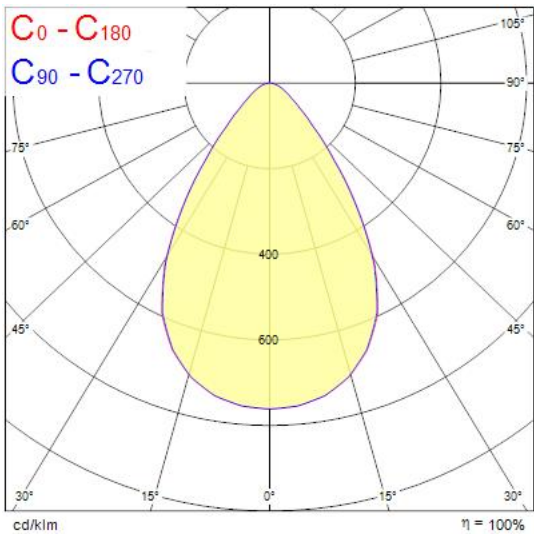

Technical drawings

