



Features

- Large ambient bulkhead luminaire with indirect halo effect, loop in/loop out wiring, surface or rear cable entry, white polycarbonate housing with opal diffuser, 2216lm, 25W, 89lm/W, 4000K, 640mA, 80CRI, non-dimmable, IP44, IK06, 40,000 hours (L70), Ø430x132mm, 5 SDCM, 1.7kg, Class II, 220-240V, Energy class A++ (integrated LED)


Product Overview

Product name	Clio 430 LED 25W 4000K EB
Technology	LED
Housing	PC Polycarbonate
Mount	Wall surface mounted
General application	Hospitality
ETIM Class	EC002892
E-number FI	4270009
E-number SE	7503267
Fixture luminous flux (lm)	2200
Luminaire efficacy (lm/W)	85
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	120
Glare control	< 28
Photobiological Risk Group	RG1
Total power consumption (W)	26


Clio 430 LED 25W 4000K EB
3079109

Electrical protection	Class II
Dimmable	No
Housing colour	White
IP rating	IP44
IK rating	IK06
Product EAN number	8711971791096
Warranty	4 years
Dimming method	N/A

Photometry

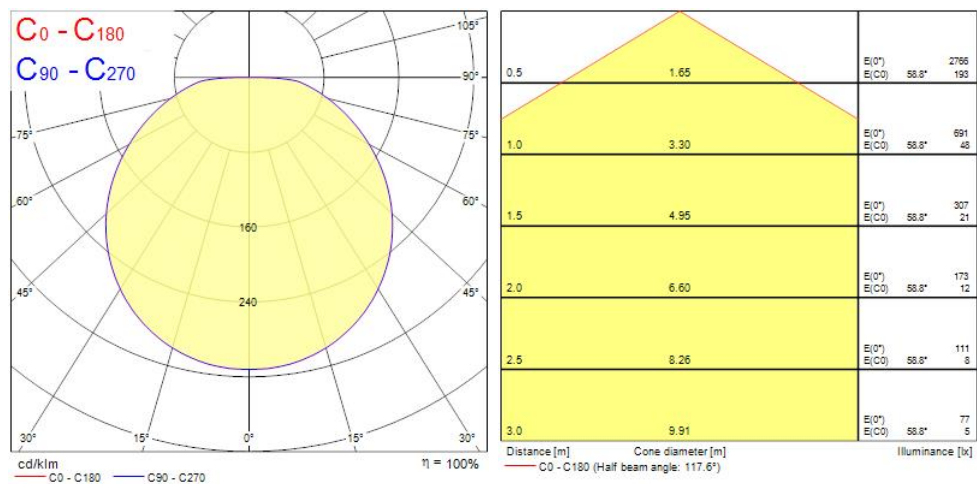

Technical drawings

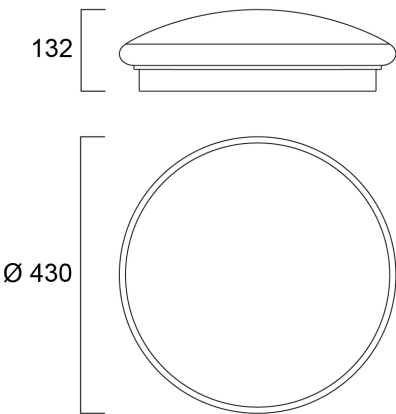

Data table

GENERAL DATA

Product name	Clio 430 LED 25W 4000K EB
Technology	LED
Housing	PC Polycarbonate
Mount	Wall surface mounted
General application	Hospitality
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
E-number FI	4270009
E-number SE	7503267
Warranty	4 years

OPTICAL DATA

Fixture luminous flux (lm)	2200
Luminaire efficacy (lm/W)	85

Clio 430 LED 25W 4000K EB 3079109

Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	120
Glare control	< 28
Photobiological Risk Group	RG1

ELECTRICAL DATA

Total power consumption (W)	26
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.9
Electrical protection	Class II
Control gear required	No
Dimmable	No
Dimming method	N/A
Drive current (mA)	125
Inrush Current (A)	6
Inrush Duration (µs)	70
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	5
Max. products per 16A C Breaker	5

LIFETIME DATA

Lifespan L70 B50	40000
Lifespan L80 B50	25000

PHYSICAL DATA

Housing colour	White
IP rating	IP44
IK rating	IK06
Diffuser finish	Opal
Diffuser material	PMMA Acrylic



Clio 430 LED 25W 4000K EB
3079109

Nominal Product Height (mm)	134.5
Nominal Product Diameter (mm)	430
Weight (kg)	1.69

PACKAGING

Product EAN number	8711971791096
Packaging single length / height (cm)	45.5
Packaging single width (cm)	15.3
Packaging single depth (cm)	45.5
DUN14 (inner)	08711971791096
Units per outer package	1
Packaging outer length / height (cm)	47.7
Packaging outer width (cm)	17.0
Packaging outer depth (cm)	48.2

SAFETY DATA

Glow Wire Test (°C)	650
Optimal operating condition (°C)	-20-40
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No