




Kabelbinders voor buiten, gemaakt van PA12, zijn bedoeld om apparaten en kabels vast te maken, ook onder lage temperaturen. Vanaf maat 9 x 265 mm zijn binders verkrijgbaar met dubbele koppen die de weerstand tegen trekspanning verhogen.

Kleur	Zwart	Afmetingen LxH (mm)	6 x 290
Materiaal	Polyamide 12	Trekspanning (daN)	24.5
Klem gripcapaciteit Ø	20-78 mm	Aantal koppen	1
Gloeidraadtest	650 °C	Type	L.T.R.
Type materiaal	Halogeenvrij conform EN 60754-2	Electrocod	3640
Diëlektrische rigiditeit	28 kV/mm	Standaard	EN 62775
Vlambestendigheid in overeenstemming met UL 94	HB	Index zuurstoflimiet	22,5%
Geabsorbeerde vochtigheid	<= 1%	Installatie temperatuur	-25 +60 °C
Bereik bedrijfstemperatuur	-45 °C +85 °C (max. pieken 120 °C)		

BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Ethyl alcohol		
Resistant	Limited resistance	Limited resistance	Limited resistance	Resistant	Resistant	Resistant	Resistant	Resistant	Resistant	Resistant

DIMENSIONAL

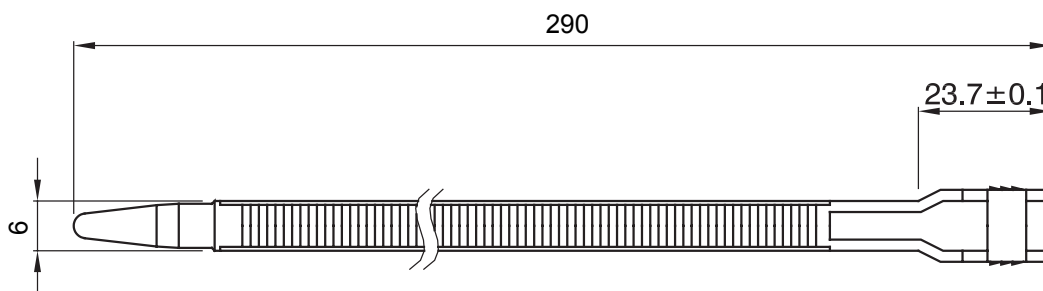

TECHNICAL SYMBOLOGY

GWT

HF
HALOGEN FREE

650 °C

Halogeenvrij conform
EN 60754-2

STANDARDS/APPROVALS



GEWISS S.p.A. Via Domenico Bosatelli 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com
sat@gewiss.com
Last update 10/03/2026

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice