

Concord

OPTIX RECESSED 600 4L LUMI 4K ALU SSC 2023878



Features

• OPTIX RECESSED 600 4L LUMI 4000K ALU SSC is a ceiling recessed luminaire for office and education applications with Aluminised plastic extra low glare optics and RAL9016 colour fixture body. SylSmart Standalone enabled. 4000K Neutral White LED, chromaticity tolerance of 3-step MacAdam ellipse. For 4000K - Colour rendering index Ra >98; Melanopic Ratio MEER: 0.776; Fidelity Index R#: 94; Gamut Index R#: 98. For 4000K luminous flux: 4500lm. Power consumption: 43W. Luminaire efficacy: 102lm/W. UGR<16 Luminance at 65°<200 Cd/m², IK07, IP20. Photobiological safety risk group 0. Electrical protection Class I. Glow wire test 850°C. 60,000hrs L80B20 lifespan.

Product Overview


Product name	OPTIX RECESSED 600 4L LUMI 4K ALU SSC
Technology	LED LumiNature
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
General application	Education, Office
ETIM Class	EC002892
Fixture luminous flux (lm)	4500
Luminaire efficacy (lm/W)	102
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	98
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	3
Glare control	< 16

Concord

OPTIX RECESSED 600 4L LUMI 4K ALU SSC 2023878

Photobiological Risk Group	RG1
Total power consumption (W)	44
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Housing colour	RAL9016
IP rating	IP20
IK rating	IK07
Product EAN number	5025768238781
Warranty	5 years
Dimming method	SylSmart SSC


Photometry

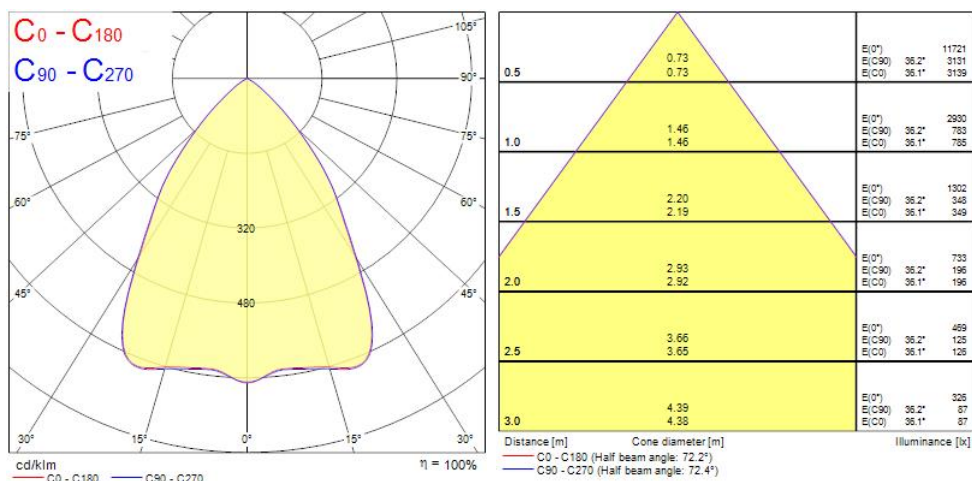

Concord

OPTIX RECESSED 600 4L LUMI 4K ALU SSC 2023878

Technical drawings

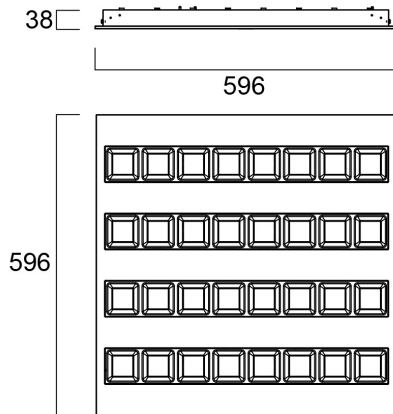

Data table

GENERAL DATA

Product name	OPTIX RECESSED 600 4L LUMI 4K ALU SSC
Technology	LED LumiNature
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
General application	Education, Office
Operating temperature range (°C)	10°C...+25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	4500
Luminaire efficacy (lm/W)	102
Correlated colour temperature (k)	4000

Concord

OPTIX RECESSED 600 4L LUMI 4K ALU SSC 2023878

Light colour	Neutral White
CRI (Ra)	98
Colour Variation Initial (SDCM)	3
Colour Consistency (SDCM)	3
Distribution type	Symmetric
Glare control	< 16
Photobiological Risk Group	RG1

ELECTRICAL DATA

Total power consumption (W)	44
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	1
THD (at 230 V, 50 Hz, full load, at 100% dimming level) \leq xx.x %	9
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	SylSmart SSC
Drive current (mA)	300
Inrush Current (A)	23
Inrush Duration (μ s)	174
Energy Efficiency Class (A->G) of contained light source	F
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	18
Max. products per 13A C Breaker	26
Max. products per 16A C Breaker	28
Max. products per 20A C Breaker	34
Max. products per 10A B Breaker	9
Max. products per 13A B Breaker	13
Max. products per 16A B Breaker	14
Max. products per 20A B Breaker	17

Concord

OPTIX RECESSED 600 4L LUMI 4K ALU SSC 2023878

Connectable conductor cross section - Max (mm ²)	2.5
--	-----

LIFETIME DATA

Lifespan L70 B50	100000
Lifespan L80 B20	60000

PHYSICAL DATA

Housing colour	RAL9016
IP rating	IP20
IK rating	IK07
Diffuser finish	Matt/satinized
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	596
Nominal Product Width (mm)	596
Nominal Product Height (mm)	38
Weight (kg)	5.0

PACKAGING

Product EAN number	5025768238781
Packaging single length / height (cm)	62.0
Packaging single width (cm)	6.5
Packaging single depth (cm)	65.0
DUN14 (inner)	05025768238781
Units per outer package	1
Packaging outer length / height (cm)	62.0
Packaging outer width (cm)	6.5
Packaging outer depth (cm)	65.0

SAFETY DATA

Glow Wire Test (°C)	850
Optimal operating condition (°C)	10-25
Special purpose lamp	No

Concord

OPTIX RECESSED 600 4L LUMI 4K ALU SSC

2023878

Dry applications use only

No

Suitable for household illumination

No