



中国认可
国际互认
检测
TESTING
CNAS L5516

EMC TEST REPORT

ETSI EN 301 489-1 V2.2.3 (2019-11)

ETSI EN 301 489-17 V3.2.4 (2020-09)

Product : EcoFlow STREAM AC Pro,
EcoFlow STREAM AC

Trade Mark : EF ECOFLOW, ECOFLOW

Model Name : EF-EA-AC-P2K-1200

EF-EA-AC-P2K-800,

Family Model : EF-EA-AC-P2K-600,EF-EA-AC-2K-800,
EF-EA-AC-2K-600

Report No. : S25062500401001

Prepared for

EcoFlow Inc.

RM 401, Plant #1, Runheng Industrial Zone, Fuyuan Road, Zhancheng Community,
Fuhai Street, Bao'an District, Shenzhen City, Guangdong Province, P.R.China

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

No. 24 Xinfu East Road, Xiangshan Community, Xinqiao Street, Baoan District,
Shenzhen, Guangdong, People's Republic of China

Tel. 0755-23200050 Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's name EcoFlow Inc.
Address RM 401, Plant #1, Runheng Industrial Zone, Fuyuanyi Road, Zhancheng Community, Fuhai Street, Bao'an District, Shenzhen City, Guangdong Province, P.R.China

Manufacturer's Name EcoFlow Inc.
Address RM 401, Plant #1, Runheng Industrial Zone, Fuyuanyi Road, Zhancheng Community, Fuhai Street, Bao'an District, Shenzhen City, Guangdong Province, P.R.China

Product description

Product name EcoFlow STREAM AC Pro, EcoFlow STREAM AC
Trademark EF ECOFLOW, ECOFLOW
Model Name EF-EA-AC-P2K-1200
Family Model EF-EA-AC-P2K-800, EF-EA-AC-P2K-600, EF-EA-AC-2K-800, EF-EA-AC-2K-600
Standards ETSI EN 301 489-1 V2.2.3 (2019-11)

ETSI EN 301 489-17 V3.2.4 (2020-09)

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the of article 3.1(b) of the Directive 2014/53/EU requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personnel only, and shall be noted in the revision of the document.

Test Sample Number S250228007003

Date of Test

Date (s) of performance of tests: Feb. 13, 2025 ~ Feb. 28, 2025

Date of Issue.....: Jun. 26, 2025

Test Result.....: **Pass**

Note: All test data of this report are based on the original test report S25022800703001-R1, dated by Feb. 28, 2025

Prepared By : Allen Huang
 Allen Huang
 (Project Engineer)

Reviewed By : Sky Zhang
 Sky Zhang
 (Supervisor)

Approved By : Alex Li
 Alex Li
 (Manager)

Table of Contents

Page

1 . TEST SUMMARY	5
1.1 TEST FACILITY	7
1.2 MEASUREMENT UNCERTAINTY	7
2 . GENERAL INFORMATION	9
2.1 DESCRIPTION OF TEST MODES	10
2.2 DESCRIPTION OF TEST SETUP	11
2.3 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL	12
2.4 MEASUREMENT INSTRUMENTS LIST	13
3 . EMC EMISSION TEST	18
3.1 CONDUCTED EMISSION MEASUREMENT	18
3.1.1 POWER LINE CONDUCTED EMISSION	18
3.1.2 TELECOMMUNICATION PORT CONDUCTED EMISSION(VOLTAGE LIMITS)	19
3.1.3 TEST PROCEDURE	21
3.1.4 TEST SETUP	21
3.1.5 EUT OPERATING CONDITIONS	21
3.1.6 TEST RESULTS	22
3.2 RADIATED EMISSION MEASUREMENT	25
3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	25
3.2.2 LIMITS OF RADIATED EMISSION MEASUREMENT	26
3.2.3 TEST PROCEDURE	26
3.2.4 TEST SETUP	27
3.2.5 EUT OPERATING CONDITIONS	27
3.2.6 TEST RESULTS (30-1000MHz)	28
3.2.7 TEST RESULTS(1000-6000MHz)	30
3.3 HARMONICS CURRENT	31
3.3.1 LIMITS OF HARMONICS CURRENT	31
3.3.2 TEST PROCEDURE	32
3.3.3 EUT OPERATING CONDITIONS	32
3.3.4 TEST SETUP	32
3.3.5 TEST RESULTS	33
3.4 VOLTAGE FLUCTUATION AND FLICKERS	34
3.4.1 LIMITS OF VOLTAGE FLUCTUATION AND FLICKERS	34
3.4.2 TEST PROCEDURE	34
3.4.3 EUT OPERATING CONDITIONS	34
3.4.4 TEST SETUP	35
4 . EMC IMMUNITY TEST	37
4.1 GENERAL PERFORMANCE CRITERIA	37
4.1.1 PERFORMANCE CRITERIA	37

Table of Contents	Page
4.2 GENERAL PERFORMANCE CRITERIA TEST SETUP	39
4.3 ESD TESTING	40
4.3.1 TEST SPECIFICATION	40
4.3.2 TEST PROCEDURE	40
4.3.3 TEST SETUP	41
4.3.4 TEST RESULTS	42
4.4 RS TESTING	44
4.4.1 TEST SPECIFICATION	44
4.4.2 TEST PROCEDURE	44
4.4.3 TEST SETUP	45
4.4.4 TEST RESULTS	46
4.5 EFT/BURST TESTING	48
4.5.1 TEST SPECIFICATION	48
4.5.2 TEST PROCEDURE	48
4.5.3 TEST SETUP	49
4.5.4 TEST RESULTS	50
4.6 SURGE TESTING	52
4.6.1 TEST SPECIFICATION	52
4.6.2 TEST PROCEDURE	52
4.6.3 TEST SETUP	53
4.6.4 TEST RESULTS	54
4.7 INJECTION CURRENT TESTING	56
4.7.1 TEST SPECIFICATION	56
4.7.2 TEST PROCEDURE	56
4.7.3 TEST SETUP	56
4.7.4 TEST RESULTS	58
4.8 VOLTAGE INTERRUPTION/DIPS TESTING	59
4.8.1 TEST SPECIFICATION	59
4.8.2 TEST PROCEDURE	59
4.8.3 TEST SETUP	59
4.8.4 TEST RESULTS	60
5 . EUT TEST PHOTO	61

1. TEST SUMMARY

Test procedures according to the technical standards:

ETSI EN 301 489-1 V2.2.3 (2019-11)

ETSI EN 301 489-17 V3.2.4 (2020-09)

EMC Emission

Standard	Test Item	Limit	Judgment	Remark
EN 55032:2015+A1:2020	Conducted Emission On AC Port 150kHz to 30MHz	Class B	PASS	
	Disturbance Voltage at The Antenna Terminals (30MHz To 2150MHz)	-----	N/A	
	Wanted signal and disturbance voltage at the RF output terminals (30MHz To 2150MHz)	-----	N/A	
	Radiated Emission 30MHz to 1000MHz	Class B	PASS	
	Radiated Emission 1GHz to 6GHz	Class B	PASS	
EN IEC 61000-3-2:2019+A1:2021	Harmonic Current Emission	Class A	PASS	NOTE (6)
EN 61000-3-3:2013+A2:2021	Voltage Fluctuations & Flicker	-----	PASS	NOTE (6)

EMC Immunity

Section	Test Item	Performance Criteria	Judgment	Remark
EN 55035:2017+A11:2020				
EN 61000-4-2:2009	Electrostatic Discharge	B	PASS	
EN 61000-4-3:2006+A1:2008+A2:2010	RF electromagnetic field	A	PASS	NOTE (4)
EN 61000-4-4:2012	Fast transients	B	PASS	NOTE (6)
EN 61000-4-5:2014+ A1:2017	Surges	B	PASS	NOTE (6)
EN 61000-4-6:2014	Continuous radio frequency disturbances or Injected Current	A	PASS	NOTE (6)
EN 61000-4-8:2010	Power Frequency Magnetic Field	A	N/A	NOTE (3)
EN 61000-4-11:2004	Volt. Interruptions Volt. Dips	B / C / C NOTE (2)	PASS	NOTE (6)

NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report
- (2) Voltage dip: 100% reduction – Performance Criteria **B**
Voltage dip: 30% reduction – Performance Criteria **C**
Voltage Interruption: 100% Interruption – Performance Criteria **C**
- (3) Applicable only to equipment containing devices intrinsically susceptible to magnetic fields, such as CRT monitors, Hall effect elements, electro-dynamic microphones, magnetic field sensors or audio frequency transformers.
- (4) The test site is located in site B.
- (5) For client's request and manual description, the test will not be executed.
- (6) The product is powered by a USB port

1.1 TEST FACILITY

Shenzhen NTEK Testing Technology Co., Ltd.

Add. (Site A): No. 24 Xinfu East Road, Xiangshan Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong, People's Republic of China

Add.(Site B) : Building 30, Furong Third Road, Furong Industrial Zone, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China

- CNAS-Lab. : The Certificate Registration Number is L5516
- IC-Registration : The Certificate Registration Number is 9270A
- FCC- Accredited : Test Firm Registration Number: 463705
Designation Number: CN1184
- A2LA-Lab. : The Certificate Registration Number is 4298.01

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

Test Item	Measurement Frequency Range	K	U(dB)
AC Mains Conducted Emission	0.009kHz ~ 0.15MHz	2	2.66
AC Mains Conducted Emission	0.15MHz ~ 30MHz	2	2.80
Telecom Conducted Emission (Cat 3)	0.15MHz ~ 30MHz	2	2.40
Telecom Conducted Emission (Cat 5)	0.15MHz ~ 30MHz	2	2.58
Radiated Emission	30MHz ~ 1000MHz	2	2.64
Radiated Emission	1000MHz ~ 6000MHz	2	2.40
Radiated Emission	6000MHz ~ 18000MHz	2	2.52

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	EcoFlow STREAM AC Pro, EcoFlow STREAM AC
Trade Mark	EF ECOFLOW, ECOFLOW
Model Name	EF-EA-AC-P2K-1200
Family Model	EF-EA-AC-P2K-800, EF-EA-AC-P2K-600,EF-EA-AC-2K-800, EF-EA-AC-2K-600
Model Difference	All models are the same circuit and RF module, except model's name, power.
Frequency Bands:	<input checked="" type="checkbox"/> BLE: 2402~2480 MHz <input checked="" type="checkbox"/> 2.4G WIFI: 802.11b/g/n/ax (20MHz): 2412~2472MHz 802.11n (40MHz):2422~2462MHz
Modulation Mode:	<input checked="" type="checkbox"/> BLE: GFSK <input checked="" type="checkbox"/> IEEE 802.11b : DSSS (CCK, DQPSK, DBPSK) <input checked="" type="checkbox"/> IEEE 802.11g/n (HT20/HT40) : OFDM(64QAM, 16QAM, QPSK, BPSK) <input checked="" type="checkbox"/> IEEE 802.11ax(HT20): OFDMA(QPSK,BPSK,16QAM, 64QAM,256QAM,1024QAM)
Adapter	N/A
Battery	DC 19.2V, 1.92KWh
Power Rating	1. PV input: 4 channels 15-60Vdc, single channel 16A Max, 500W Max. 4 channels totaling 2000W Max. 2. AC parallel interface: 1 channel 184-264Vac, 10A, 2300W; 3. AC grid connection interface: 1 channel Grid connected output: 184-264Vac, 3.5A, 800W; Grid input: 184-264Vac, 10A, 2300W; 4. AC load output: 2 channels, with a total output of 2300W for both channels. If one channel carries 2300W, the other channel cannot carry the load; Inverter output: 184-264Vac, 5.3A, 1200W; Bypass output: 184-264Vac, 10A, 2300W
Connecting I/O Port(s)	Please refer to the User's Manual
Antenna:	PCB Antenna
Hard Ware Version	N/A
Firmware version:	N/A
Soft Ware Version	N/A

2.1 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Battery charge & AC On Grid+Load
Mode 2	Battery discharge & AC On Grid+Load
Mode 3	Standby
Mode 4	BLE
Mode 5	2.4G WIFI Link

For Conducted Test	
Final Test Mode	Description
Mode 1	Battery charge & AC On Grid+Load


For Radiated Test	
Final Test Mode	Description
Mode 1	Battery charge & AC On Grid+Load

For EMS Test	
Pretest Mode	Description
Mode 1	Battery charge & AC On Grid+Load
Mode 2	Battery discharge & AC On Grid+Load
Mode 3	Standby
Mode 4	BLE
Mode 5	2.4G WIFI Link


NOTE: The test modes were carried out for all operation modes. The final test mode of the EUT was the worst test mode for EMI, and its test data was showed.

2.2 DESCRIPTION OF TEST SETUP

CE:

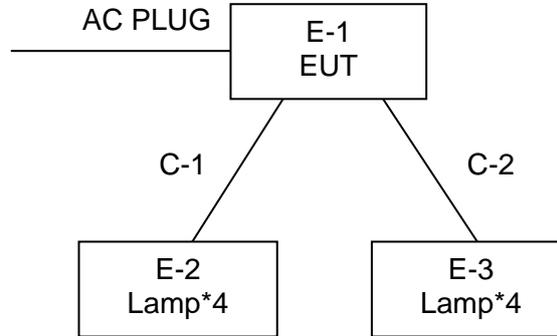

RE:

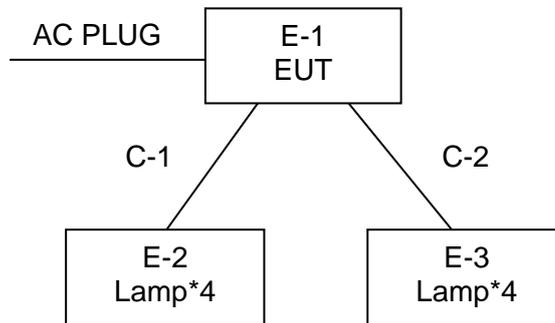

2.3 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
E-1	EcoFlow STREAM AC Pro, EcoFlow STREAM AC	EF-EA-AC-P2K-1200	N/A	EUT
E-2	Lamp	N/A	N/A	Peripherals
E-3	Lamp	N/A	N/A	Peripherals

Item	Cable Type	Shielded Type	Ferrite Core	Note
C-1	Power Cable	NO	NO	
C-2	Power Cable	NO	NO	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.4 MEASUREMENT INSTRUMENTS LIST

2.4.1 CONDUCTED EMISSION

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Cable	N/A	C01	N/A	2023.05.06	2026.05.05	3 year
2	Test Cable	N/A	C02	N/A	2023.05.06	2026.05.05	3 year
3	Low Frequency Cable	N/A	R-03	N/A	2022.04.25	2025.04.24	3 year
4	Pulse Limiter	SCHWARZBECK	VTSD 9561F	9716	2022.06.17	2025.06.16	3 year
5	50Ω Switch	ANRITSU CORP	MP59B	6200983704	2024.04.26	2027.04.25	3 year
6	EMI Test Receiver	R&S	ESCI	101160	2024.04.26	2025.04.25	1 year
7	Universal radio communication tester	R&S	CMU200	1100.008.02	2024.05.30	2025.05.29	1 year
8	Wideband Radio Communication Tester Specifications	R&S	CMW500	148500	2024.05.30	2025.05.29	1 year
9	LISN	SCHWARZBECK	NNLK 8129	8129245	2024.04.25	2025.04.24	1 year
10	LISN	R&S	ENV216	101313	2024.04.25	2025.04.24	1 year

2.4.2 RADIATED TEST SITE

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Antenna Mast	EM	SC100_1	N/A	N/A	N/A	N/A
2	Turn Table	EM	SC100	060531	N/A	N/A	N/A
3	EMI Test Receiver	R&S	ESPI3	101417	2024.05.15	2025.05.14	1 year
4	50Ω Switch	Anritsu Corp	MP59B	6200983705	2024.04.26	2027.04.25	3 year
5	Spectrum Analyzer	Agilent	E4440A	MY41000130	2024.04.26	2025.04.25	1 year
6	Universal radio communication tester	R&S	CMU200	1100.008.02	2024.05.30	2025.05.29	1 year
7	Wideband Radio Communication Tester Specifications	R&S	CMW500	148500	2024.05.30	2025.05.29	1 year
8	Test Cable	Talent Microwave	A81-NMNM-8.5M	22084897	2024.04.26	2027.04.25	3 year
9	Test Cable	Talent Microwave	A81-NMNM-2M	22084894	2024.04.26	2027.04.25	3 year
10	Bilog Antenna	TESEQ	CBL6111D	31216	2024.03.11	2025.03.10	1 year
11	Horn Antenna	SCHWARZBECK	BBHA 9120D	2816	2024.05.12	2027.05.11	3 year
12	Log-Periodic Antenna	SCHWARZBECK	VULB 9162	675	2024.05.18	2025.05.17	1 year
13	Amplifier	EMC	EMC051835SE	980246	2024.04.25	2025.04.24	1 year

2.4.3 HARMONICS AND FILCK

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Power analyzer	YOKOGAWA	WT3000	91R11253 9	2024.05.15	2025.05.14	1 year
2	AC current probe	CHAUVINAR NOUX	C112	111659	2024.10.26	2025.10.25	1 year
3	AC current probe	CHAUVINAR NOUX	C112	111647	2024.10.26	2025.10.25	1 year
4	AC current probe	CHAUVINAR NOUX	C112	111649	2024.10.26	2025.10.25	1 year
5	Array power grid simulator	ACTIONPOWER	AGS-30-70 05	CS240404 48	2024.05.15	2025.05.14	1 year
6	Unversal radio communication tester	R&S	CMU200	1100.008.0 2	2024.05.30	2025.05.29	1 year
7	Wideband Radio Communication Tester Specifications	R&S	CMW500	148500	2024.05.30	2025.05.29	1 year

2.4.4 ESD

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Unversal radio communication tester	R&S	CMU200	1100.008.0 2	2024.05.30	2025.05.29	1 year
2	Wideband Radio Communication Tester Specifications	R&S	CMW500	148500	2024.05.30	2025.05.29	1 year
3	ESD Generator	EVERFINE	EMS61000- 2A	P615727T A1421113	2024.05.27	2025.05.26	1 year

2.4.5 RS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Unversal radio communication tester	R&S	CMU200	1100.008.0 2	2024.05.30	2025.05.29	1 year
2	Wideband Radio Communication Tester Specifications	R&S	CMW500	148500	2024.05.30	2025.05.29	1 year
3	Audio Power Amplifier	Brüel & Kjær	4602B	2185667	2024.05.30	2025.05.29	1 year
4	Mouth Simulator	Brüel & Kjær	2669	2143265	2024.05.30	2025.05.29	1 year
5	Sound Calibrator	Brüel & Kjær	4185	2194825	2024.05.30	2025.05.29	1 year
6	1/2" Pressure-field Microphone	Brüel & Kjær	735	2641678	2024.05.30	2025.05.29	1 year
7	Telephone Test Head	Brüel & Kjær	4185	2631728	2024.05.30	2025.05.29	1 year

8	Audio Analyzer	R&S	UPV	100419	2024.05.30	2025.05.29	1 year
9	Ear Simulator for Telephonometry	Brüel & Kjær	4185	2553612	2024.03.12	2025.03.11	1 year
10	Bilog Antenna	ETS	3142E(Frequency range 30MHz to 6 GHz)	00214344	2024.06.01	2027.05.30	3 year
11	Broadband Amplifier	AR	60S1G6	0350414	2024.04.26	2025.04.25	1 year
12	MXG Vector Signal Generator	Agilent	N5182A	MY47070317	2024.05.30	2025.05.29	1 year
13	Power Amplifier	rflight	NTWPA-00810200	17063153	2024.04.26	2025.04.25	1 year
14	Power Amplifier	AR	25S1G4A	308598	2024.04.26	2025.04.25	1 year
15	Power Meter	Agilent	E4419B	MY45102538	2024.04.25	2025.04.24	1 year
16	Power Sensor	Agilent	E9301A	MY41495644	2024.04.25	2025.04.24	1 year
17	Power Sensor	Agilent	E9301A	US39212148	2024.04.25	2025.04.24	1 year
18	ESG Vector Signal Generator	Agilent	E4438C	MY45093347	2024.04.26	2025.04.25	1 year

2.4.6 SURGE, EFT/BURST, VOLTAGE INTERRUPTION/DIPS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Surge Generator	EVERFINE	EMS61000-5A-V1	1101002	2024.04.26	2025.04.25	1 year
2	Array power grid simulator	ACTIONPOWER	AGS-30-7005	CS24040448	2024.05.15	2025.05.14	1 year
3	EFT/B Generator	EVERFINE	EMS61000-4A-V2	1012005	2024.04.26	2025.04.25	1 year
4	Universal radio communication tester	R&S	CMU200	1100.008.02	2024.05.30	2025.05.29	1 year
5	Wideband Radio Communication Tester Specifications	R&S	CMW500	148500	2024.05.30	2025.05.29	1 year

2.4.7 INJECTION CURRENT

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Attenuator	TESEQ	ATN 6075	38411	N/A	N/A	N/A
2	RF Cable	TESEQ	RF Cable	N/A	N/A	N/A	N/A
3	Signal Generator	R&S	SML03	100954	2024.05.30	2025.05.29	1 year
4	Power Amplifier	TESEQ	CBA 230M-080	T44376	2024.04.26	2025.04.25	1 year
5	EM Clamp	FCC	F-203I-23M M	504	2024.04.26	2025.04.25	1 year
6	Audio Power Amplifier	Brüel & Kjær	4602B	2185667	2024.03.12	2025.03.11	1 year
7	Mouth Simulator	Brüel & Kjær	2669	2143265	2024.09.13	2025.09.12	1 year
8	Sound Calibrator	Brüel & Kjær	4185	2194825	2024.09.14	2025.09.13	1 year
9	1/2" Pressure-field Microphone	Brüel & Kjær	735	2641678	2024.09.14	2025.09.13	1 year
10	Audio Analyzer	R&S	UPV	100419	2024.09.14	2025.09.13	1 year
11	Ear Simulator for Telephonometry	Brüel & Kjær	4185	2553612	2024.05.30	2025.05.29	1 year
12	Telephone Test Head	Brüel & Kjær	4185	2631728	2024.05.30	2025.05.29	1 year
13	Unversal radio communication tester	R&S	CMU200	1100.008.0 2	2024.05.30	2025.05.29	1 year
14	Wideband Radio Communication Tester Specifications	R&S	CMW500	148500	2024.05.30	2025.05.29	1 year
15	Coupling and Decoupling Network	SCHWARZBECK	CDN M5PE 32A 1000V	N/A	2024.04.26	2026.04.25	1 year
16	Attenuator	Jingtenghong	JTH-SJ-100 W-6dB	100145143 000686	2024.04.26	2027.04.25	3 year
17	EM Clamp	TESEQ	KEMZ 801A	47860	2024.04.26	2026.04.25	1 year

Measurement Software
EMI

Item	Manufacturer	Software Name	Software Version	Description
1	Farad	EZ-EMC_RE	AIT-03A	RadiatedTest
2	Farad	EZ-EMC_CE	AIT-03A	AC Conducted Test
3	Everfine	HFMSuite	V2.00.131	Harmonic Current and Voltage Fluctuations&FlickerTest

EMS

Item	Manufacturer	Software Name	Software Version	Description
1	raditeq	RadiMation	2023.1.3	RF Electromagnetic Field Test
2	raditeq	RadiMation	2023.1.3	Injected Current Test

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150kHz-30MHz)

Table A.8 – Requirements for conducted emissions from the AC mains power ports of Class A equipment

Applicable to				
1. AC mains power ports (3.1.1)				
Table clause	Frequency range MHz	Coupling device (see Table A.7)	Detector type / bandwidth	Class A limits dB(μV)
A8.1	0,15 – 0,5	AMN	Quasi Peak / 9 kHz	79
	0,5 – 30			73
A8.2	0,15 – 0,5	AMN	Average / 9 kHz	66
	0,5 – 30			60
Apply A8.1 and A8.2 across the entire frequency range.				

Table A.9 – Requirements for conducted emissions from the AC mains power ports of Class B equipment

Applicable to				
1. AC mains power ports (3.1.1)				
Table clause	Frequency range MHz	Coupling device (see Table A.7)	Detector type / bandwidth	Class B limits dB(μV)
A9.1	0,15 – 0,5	AMN	Quasi Peak / 9 kHz	66 – 56
	0,5 – 5			56
	5 – 30			60
A9.2	0,15 – 0,5	AMN	Average / 9 kHz	56 – 46
	0,5 – 5			46
	5 – 30			50
Apply A9.1 and A9.2 across the entire frequency range.				

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

3.1.2 TELECOMMUNICATION PORT CONDUCTED EMISSION(VOLTAGE LIMITS) (Frequency Range 150kHz-30MHz)

Table A.10 – Requirements for asymmetric mode conducted emissions from Class A equipment

Applicable to					
1. wired network ports (3.1.30) 2. optical fibre ports (3.1.24) with metallic shield or tension members 3. antenna ports (3.1.3)					
Table clause	Frequency range MHz	Coupling device (see Table A.7)	Detector type / bandwidth	Class A voltage limits dB(μV)	Class A current limits dB(μA)
A10.1	0,15 – 0,5	AAN	Quasi Peak / 9 kHz	97 – 87	n/a
	0,5 – 30			87	
	0,15 – 0,5	AAN	Average / 9 kHz	84 – 74	
	0,5 – 30			74	
A10.2	0,15 – 0,5	CVP and current probe	Quasi Peak / 9 kHz	97 – 87	53 – 43
	0,5 – 30			87	43
	0,15 – 0,5	CVP and current probe	Average / 9 kHz	84 – 74	40 – 30
	0,5 – 30			74	30
A10.3	0,15 – 0,5	Current Probe	Quasi Peak / 9 kHz	n/a	53 – 43
	0,5 – 30				43
	0,15 – 0,5	Current Probe	Average / 9 kHz		40 – 30
	0,5 – 30				30
The choice of coupling device and measurement procedure is defined in Annex C. AC mains ports that also have the function of a wired network port shall meet the limits given in Table A.8. The test shall cover the entire frequency range. The application of the voltage and/or current limits is dependent on the measurement procedure used. Refer to Table C.1 for applicability. Testing is required at only one EUT supply voltage and frequency. Applicable to ports listed above and intended to connect to cables longer than 3 m.					

Table A.12 – Requirements for conducted differential voltage emissions from Class B equipment

Applicable to						
1. TV broadcast receiver tuner ports (3.1.8) with an accessible connector 2. RF modulator output ports (3.1.27) 3. FM broadcast receiver tuner ports (3.1.8) with an accessible connector						
Table clause	Frequency range MHz	Detector type/ bandwidth	Class B limits dB(μV) 75 Ω			Applicability
			Other	Local Oscillator Fundamental	Local Oscillator Harmonics	
A12.1	30 – 950	For frequencies ≤1 GHz	46	46	46	See a)
	950 – 2 150		46	54	54	
A12.2	950 – 2 150	Quasi Peak/ 120 kHz	46	54	54	See b)
A12.3	30 – 300		For frequencies ≥1 GHz	46	54	50
	300 – 1 000	52				
A12.4	30 – 300	For frequencies ≥1 GHz	46	66	59	See d)
	300 – 1 000				52	
A12.5	30 – 950	Peak/ 1 MHz	46	76	46	See e)
	950 – 2 150			n/a	54	

a) Television receivers (analogue or digital), video recorders and PC TV broadcast receiver tuner cards working in channels between 30 MHz and 1 GHz, and digital audio receivers.

b) Tuner units (not the LNB) for satellite signal reception.

c) Frequency modulation audio receivers and PC tuner cards.

d) Frequency modulation car radios.

e) Applicable to EUTs with RF modulator output ports (for example DVD equipment, video recorders, camcorders and decoders etc.) designed to connect to TV broadcast receiver tuner ports.

Testing is required at only one EUT supply voltage and frequency.

The term 'other' refers to all emissions other than the fundamental and the harmonics of the local oscillator.

The test shall be performed with the device operating at each reception channel.

The test shall cover the entire frequency range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.3 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.4 TEST SETUP

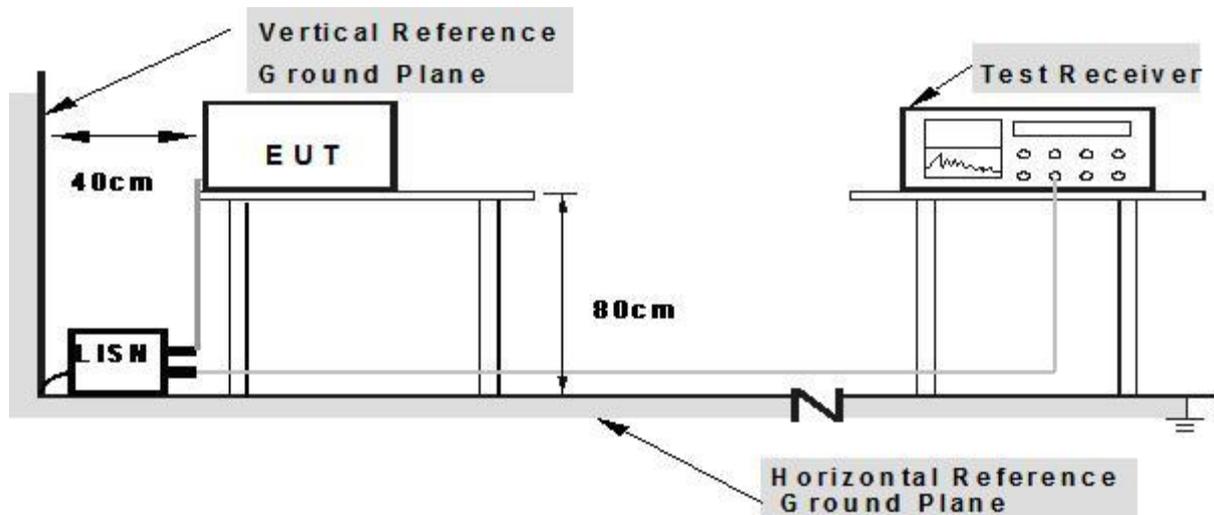

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.2 Unless otherwise a special operating condition is specified in the follows during the testing.


3.1.6 TEST RESULTS


EUT :	EcoFlow STREAM AC Pro, EcoFlow STREAM AC	Model Name. :	EF-EA-AC-P2K-1200
Temperature :	22.4°C	Relative Humidity :	55.1%
Pressure :	1010hPa	Phase :	L
Test Voltage :	AC 230V/50Hz	Test Mode :	Mode 1

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1819	45.30	9.98	55.28	64.40	-9.12	QP
0.1819	40.70	9.98	50.68	54.40	-3.72	AVG
1.7820	34.38	13.23	47.61	56.00	-8.39	QP
1.7820	17.83	13.23	31.06	46.00	-14.94	AVG
4.8620	36.30	9.68	45.98	56.00	-10.02	QP
4.8620	32.83	9.68	42.51	46.00	-3.49	AVG
5.2220	37.17	9.68	46.85	60.00	-13.15	QP
5.2220	32.32	9.68	42.00	50.00	-8.00	AVG
18.1220	35.33	9.83	45.16	60.00	-14.84	QP
18.1220	23.75	9.83	33.58	50.00	-16.42	AVG
26.7020	38.67	10.01	48.68	60.00	-11.32	QP
26.7020	32.84	10.01	42.85	50.00	-7.15	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

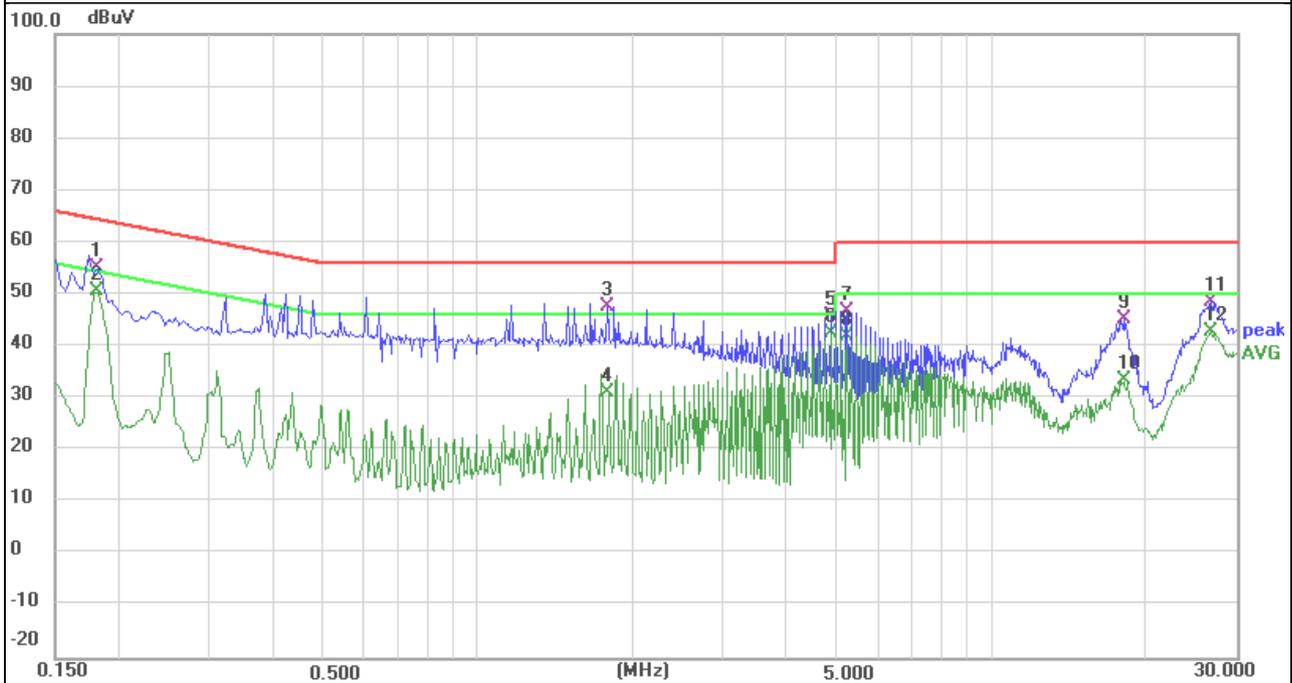




EUT :	EcoFlow STREAM AC Pro, EcoFlow STREAM AC	Model Name. :	EF-EA-AC-P2K-12 00
Temperature :	22.4°C	Relative Humidity :	55.1%
Pressure :	1010hPa	Phase :	N
Test Voltage :	AC 230V/50Hz	Test Mode :	Mode 1

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1833	45.18	9.98	55.16	64.33	-9.17	QP
0.1833	39.76	9.98	49.74	54.33	-4.59	AVG
0.2980	40.39	10.21	50.60	60.30	-9.70	QP
0.2980	30.25	10.21	40.46	50.30	-9.84	AVG
1.8980	33.75	13.47	47.22	56.00	-8.78	QP
1.8980	18.90	13.47	32.37	46.00	-13.63	AVG
4.8620	34.46	9.68	44.14	56.00	-11.86	QP
4.8620	30.56	9.68	40.24	46.00	-5.76	AVG
17.4257	35.23	9.82	45.05	60.00	-14.95	QP
17.4257	24.24	9.82	34.06	50.00	-15.94	AVG
27.2420	40.19	10.03	50.22	60.00	-9.78	QP
27.2420	33.69	10.03	43.72	50.00	-6.28	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

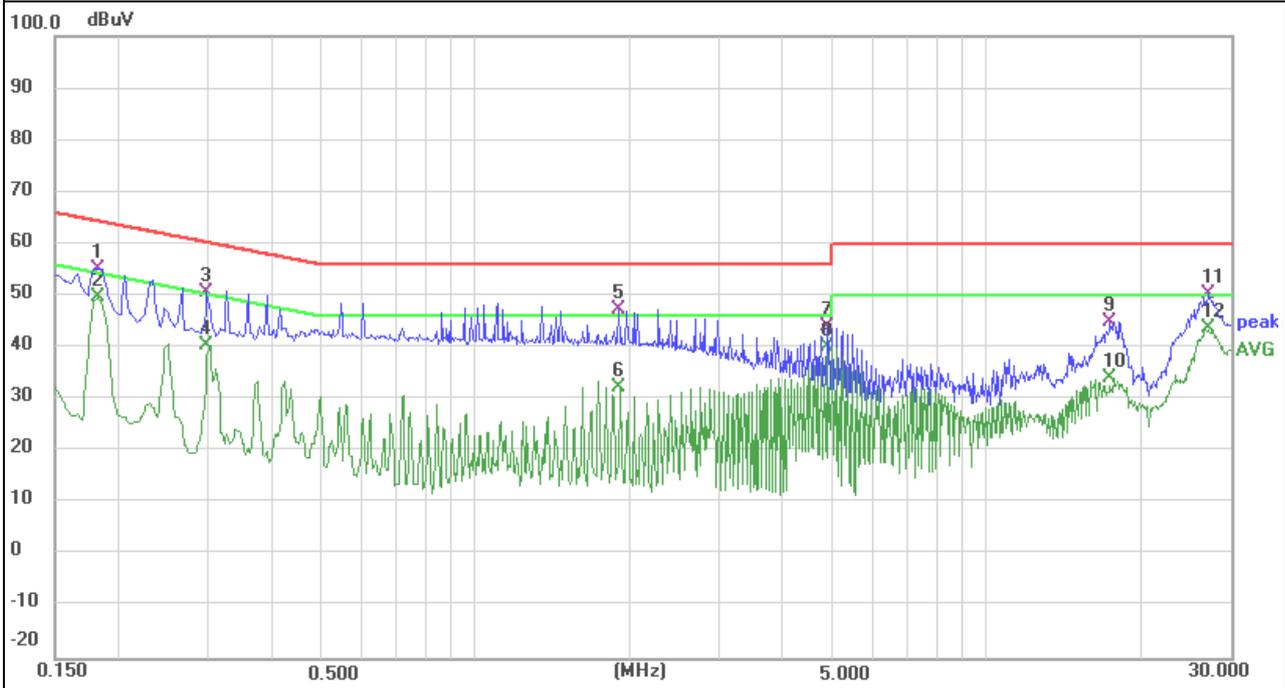

Note: The test modes were carried out for all operation modes. The worst test mode for test data was showed in the report.

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT (Below 1000MHz)

Table A.2 – Requirements for radiated emissions at frequencies up to 1 GHz for Class A equipment

Table clause	Frequency range MHz	Measurement		Class A limits dB(μV/m)
		Distance m	Detector type/ bandwidth	OATS/SAC (see Table A.1)
A2.1	30 – 230	10	Quasi Peak / 120 kHz	40
	230 – 1 000			47
A2.2	30 – 230	3		50
	230 – 1 000			57

Apply only A2.1 or A2.2 across the entire frequency range.

Table A.4 – Requirements for radiated emissions at frequencies up to 1 GHz for Class B equipment

Table clause	Frequency range MHz	Measurement		Class B limits dB(μV/m)
		Distance m	Detector type/ bandwidth	OATS/SAC (see Table A.1)
A4.1	30 – 230	10	Quasi Peak / 120 kHz	30
	230 – 1 000			37
A4.2	30 – 230	3		40
	230 – 1 000			47

Apply only table clause A4.1 or A4.2 across the entire frequency range.

Table A.6 – Requirements for radiated emissions from FM receivers

Table clause	Frequency range MHz	Measurement		Class B limit dB(μV/m)		
		Distance m	Detector type/ bandwidth	Fundamental	Harmonics	
				OATS/SAC (see Table A.1)	OATS/SAC (see Table A.1)	
A6.1	30 – 230	10	Quasi peak/ 120 kHz	50	42	
	230 – 300				42	
	300 – 1 000				46	
A6.2	30 – 230	3		Quasi peak/ 120 kHz	60	52
	230 – 300					52
	300 – 1 000					56

Apply only A.6.1 or A.6.2 across the entire frequency range.

These relaxed limits apply only to emissions at the fundamental and harmonic frequencies of the local oscillator. Signals at all other frequencies shall be compliant with the limits given in Table A.4.

3.2.2 LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Table A.3 – Requirements for radiated emissions at frequencies above 1 GHz for Class A equipment

Table clause	Frequency range MHz	Measurement		Class A limits dB(μV/m)
		Distance m	Detector type/ bandwidth	FSOATS (see Table A.1)
A3.1	1 000 – 3 000	3	Average / 1 MHz	56
	3 000 – 6 000			60
A3.2	1 000 – 3 000		Peak / 1 MHz	76
	3 000 – 6 000			80

Apply A3.1 and A3.2 across the frequency range from 1 000 MHz to the highest required frequency of measurement derived from Table 1.

Table A.5 – Requirements for radiated emissions at frequencies above 1 GHz for Class B equipment

Table clause	Frequency range MHz	Measurement		Class B limits dB(μV/m)
		Distance m	Detector type/ bandwidth	FSOATS (see Table A.1)
A5.1	1 000 – 3 000	3	Average/ 1 MHz	50
	3 000 – 6 000			54
A5.2	1 000 – 3 000		Peak/ 1 MHz	70
	3 000 – 6 000			74

Apply A5.1 and A5.2 across the frequency range from 1 000 MHz to the highest required frequency of measurement derived from Table 1.

Notes:


- (1) The limit for radiated test was performed according to as following: CISPR 32.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBμV/m)=20log Emission level (uV/m).

3.2.3 TEST PROCEDURE


- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.2.4 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

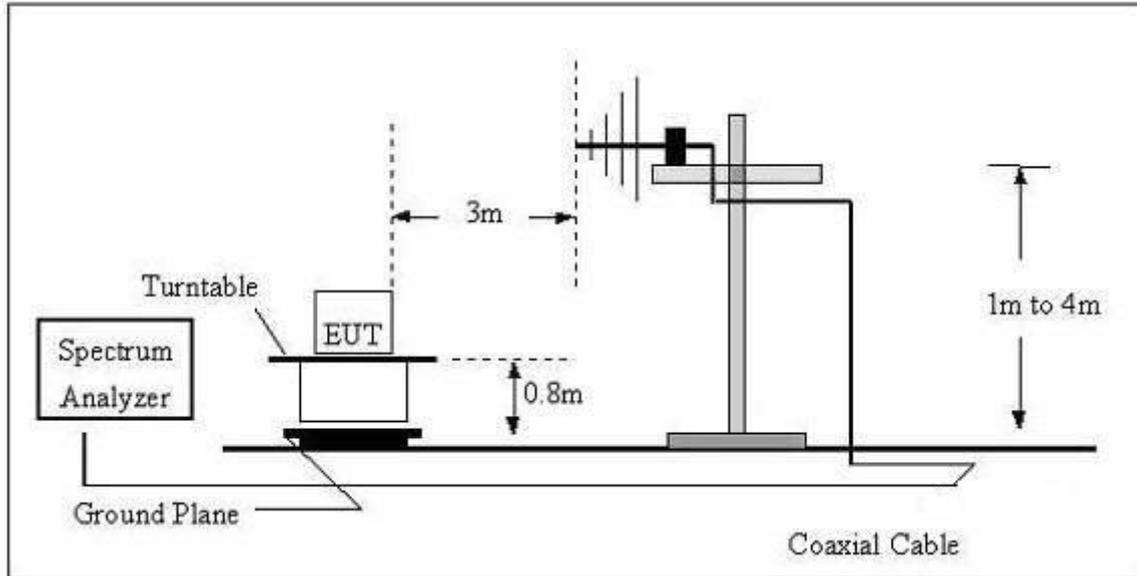

(B) Radiated Emission Test Set-Up Frequency Above 1GHz

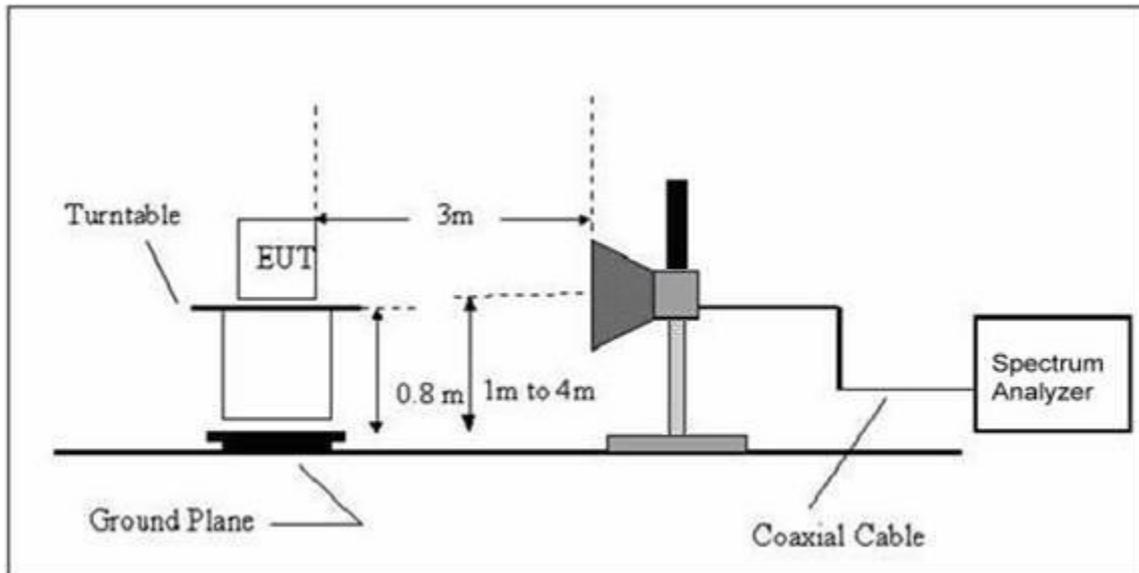

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.2 Unless otherwise a special operating condition is specified in the follows during the testing.


3.2.6 TEST RESULTS (30-1000MHz)

EUT :	EcoFlow STREAM AC Pro, EcoFlow STREAM AC	Model Name :	EF-EA-AC-P2K-1200
Temperature :	24.5°C	Relative Humidity :	54%
Pressure :	1010 hPa	Polarization :	Horizontal
Test Power :	AC 230V/50Hz	Test Mode :	Mode 1

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
107.5100	17.35	19.10	36.45	40.00	-3.55	QP
154.2790	15.33	16.04	31.37	40.00	-8.63	QP
188.4124	14.30	18.00	32.30	40.00	-7.70	QP
229.2930	14.61	18.40	33.01	40.00	-6.99	QP
404.6670	13.38	22.24	35.62	47.00	-11.38	QP
508.2580	13.83	23.70	37.53	47.00	-9.47	QP

Remark:

1. Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit.

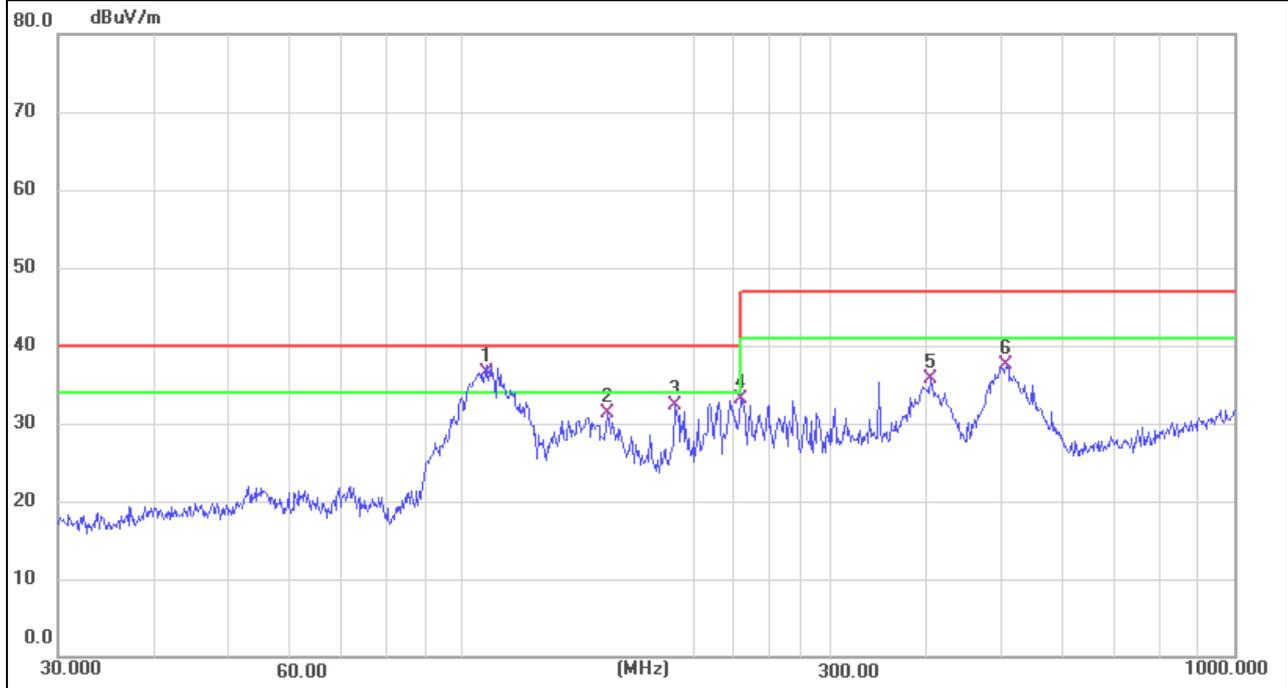


EUT :	EcoFlow STREAM AC Pro, EcoFlow STREAM AC	Model Name :	EF-EA-AC-P2K-1200
Temperature :	24.5°C	Relative Humidity :	54%
Pressure :	1010 hPa	Polarization :	Vertical
Test Power :	AC 230V/50Hz	Test Mode :	Mode 1

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
56.0007	16.28	19.79	36.07	40.00	-3.93	QP
107.5100	17.33	19.10	36.43	40.00	-3.57	QP
121.1230	20.26	16.67	36.93	40.00	-3.07	QP
135.5061	21.49	15.38	36.87	40.00	-3.13	QP
147.4036	21.06	15.04	36.10	40.00	-3.90	QP
216.0240	17.46	18.36	35.82	40.00	-4.18	QP

Remark:

1. Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit.

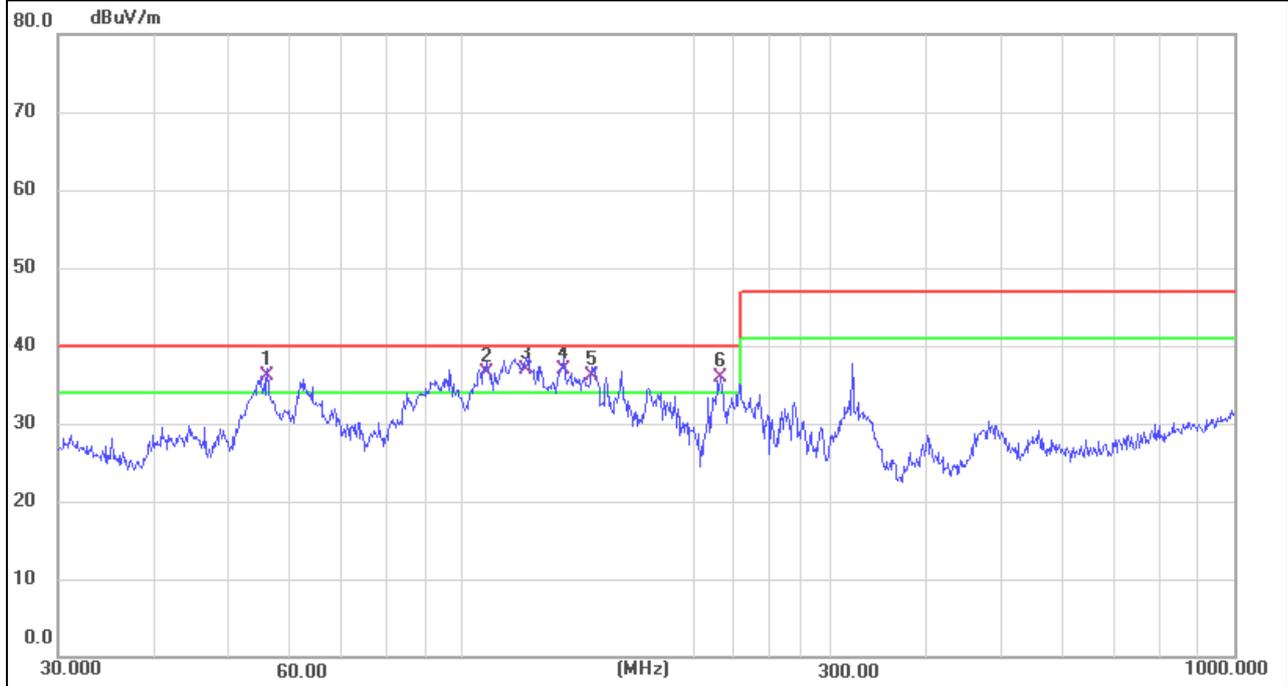

Note: The test modes were carried out for all operation modes. The worst test mode for test data was showed in the report.

3.2.7 TEST RESULTS(1000-6000MHz)

EUT :	EcoFlow STREAM AC Pro, EcoFlow STREAM AC	Model Name :	EF-EA-AC-P2K-1200
Temperature :	22°C	Relative Humidity :	48.9%
Pressure :	1010 hPa	Test Mode :	Mode 1
Test Power :	AC 230V/50Hz		
Result	PASS		

3.3 HARMONICS CURRENT

3.3.1 LIMITS OF HARMONICS CURRENT

Table 1 – Limits for Class A equipment

Harmonic order (n)	Maximum permissible harmonic current (A)
Odd harmonics	
3	2.3
5	1.14
7	0.77
9	0.4
11	0.33
13	0.21
$15 \leq n \leq 39$	$0.15 * (15/n)$
Even harmonics	
2	1.08
4	0.43
6	0.30
$8 \leq n \leq 40$	$0.23 * (8/n)$

Note: Reference standard of the table above: EN61000-3-2.

3.3.2 TEST PROCEDURE

a. The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the maximum harmonic components under normal operating conditions.

b. The classification of EUT is according to section 5 of EN 61000-3-2. The EUT is classified as follows:

Class A: Balanced three-phase equipment, Household appliances excluding equipment as Class D, Tools excluding portable tools, Dimmers for incandescent lamps, audio equipment, equipment not specified in one of the three other classes.

Class B: Portable tools. Portable tools.; Arc welding equipment which is not professional equipment.

Class C: Lighting equipment.


Class D: Equipment having a specified power less than or equal to 600W of the following types: Personal computers and personal computer monitors and television receivers.

c. The correspondent test program of test instrument to measure the current harmonics emanated from EUT is chosen. The measure time shall be not less than the time necessary for the EUT to be exercised.

3.3.3 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **2.3** Unless otherwise a special operating condition is specified in the follows during the testing.

3.3.4 TEST SETUP

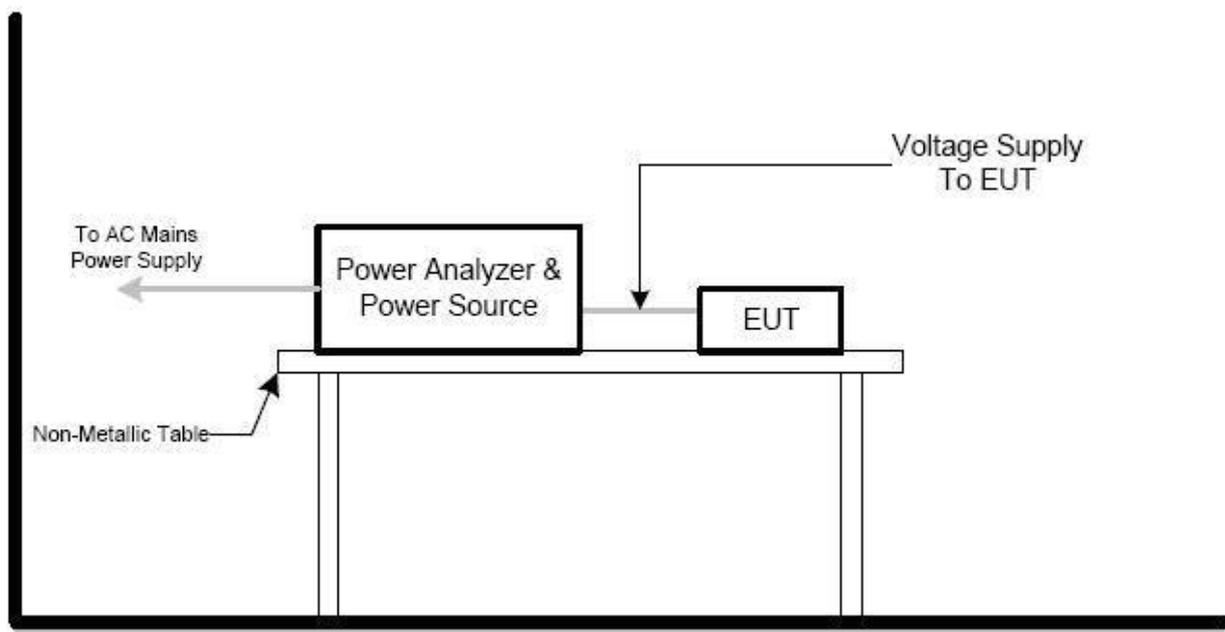

3.3.5 TEST RESULTS

EUT:	EcoFlow STREAM AC Pro, EcoFlow STREAM AC	Model Name:	EF-EA-AC-P2K-1200
Temperature:	20°C	Relative Humidity:	49%
Pressure:	1012hPa	Test duration:	150s
Classification:	Class A	Test Power:	AC 230V/50Hz
Test Mode:	Mode 1		
Result	PASS		

3.4 VOLTAGE FLUCTUATION AND FLICKERS

3.4.1 LIMITS OF VOLTAGE FLUCTUATION AND FLICKERS

Test items	Limits(EN61000-3-3)	Descriptions
P _{st}	≤1.0, T _p =10min	short-term flicker indicator
P _{lt}	≤0.65, T _p =2h	long-term flicker indicator
d _c	≤3.3%	relative steady-state voltage change
d _{max}	≤4%(or 6% ^{Note(1)} , 7% ^{Note(2)})	maximum relative voltage change:
d _(t)	≤3.3%, no more than 500ms	relative voltage change characteristic

Note:

1. 6 % for equipment which is:
 - a. switched manually, or
 - b. switched automatically more frequently than twice per day, and also has either a delayed restart (the delay being not less than a few tens of seconds), or manual restart, after a power supply interruption.
2. 7 % for equipment which is
 - a. attended whilst in use (for example: hair dryers, vacuum cleaners, kitchen equipment such as mixers, garden equipment such as lawn mowers, portable tools such as electric drills), or
 - b. switched on automatically, or is intended to be switched on manually, no more than twice per day, and also has either a delayed restart (the delay being not less than a few tens of seconds) or manual restart, after a power supply interruption.

3.4.2 TEST PROCEDURE

a. Harmonic Current Test:

Test was performed according to the procedures specified in Sub-clause 6.2 of IEC/EN 61000-3-2 depend on which standard adopted for compliance measurement.

b. Fluctuation and Flickers Test:


Tests was performed according to the Test Conditions/Assessment of Voltage Fluctuations specified in Clause 6.0/4.0 of IEC/EN 61000-3-3 depend on which standard adopted for compliance measurement.

c. All types of harmonic current and/or voltage fluctuation in this report are assessed by direct measurement using flicker-meter.

3.4.3 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

3.4.4 TEST SETUP

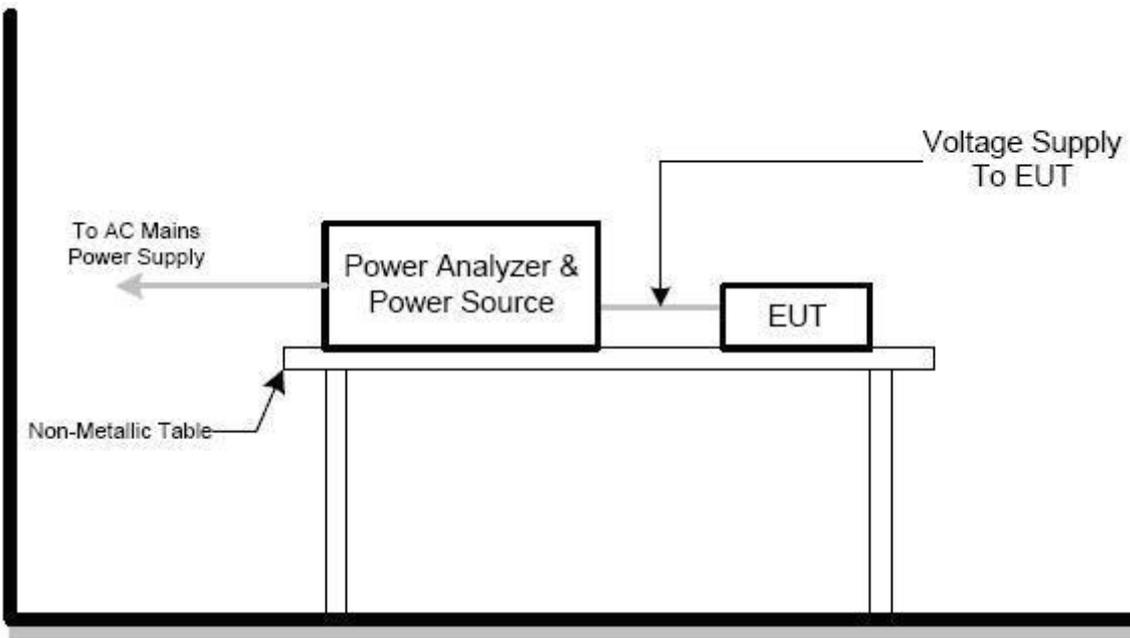

3.4.5 TEST RESULTS

EUT :	EcoFlow STREAM AC Pro, EcoFlow STREAM AC	Model Name :	EF-EA-AC-P2K-1200
Temperature :	25 °C	Relative Humidity :	45%
Pressure :	1010 hPa	Test Power :	AC 230V/50Hz
Test Mode:	Mode 1		
Result	PASS		

4. EMC IMMUNITY TEST

4.1 GENERAL PERFORMANCE CRITERIA

4.1.1 PERFORMANCE CRITERIA

According to **EN 55035** standard, the general performance criteria as following:

<p>Criterion A</p>	<p>The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer when the equipment is used as intended.</p> <p>The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.</p>
<p>Criterion B</p>	<p>After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the equipment is used as intended.</p> <p>The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is allowed. However, no change of operating state or stored data is allowed to persist after the test.</p>
<p>Criterion C</p>	<p>Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions.</p> <p>Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.</p>

According to **EN 301489-17** standard, the general performance criteria as following:

Criteria	During the test	After the test
A	Shall operate as intended. (see note 1). Shall be no loss of function. Shall be no unintentional transmissions	Shall operate as intended. Shall be no degradation of performance (see note 3). Shall be no loss of function. Shall be no loss of stored data or user programmable functions
B	May show loss of function (one or more). May show degradation of performance (see note 2). Shall be no unintentional transmissions.	Functions shall be self-recoverable. Shall operate as intended after recovering. Shall be no degradation of performance (see note 3). Shall be no loss of stored data or user programmable functions.
C	May be loss of function (one or more)	Functions shall be recoverable by the operator. Shall operate as intended after recovering. Shall be no degradation of performance (see note 3).

NOTE 1: Operate as intended during the test allows a level of degradation not below a minimum performance level specified by the manufacturer for the use of the apparatus as intended. In some cases the specified minimum performance level may be replaced by a permissible degradation of performance. If the minimum performance level or the permissible performance degradation is not specified by the manufacturer then either of these may be derived from the product description and documentation (including leaflets and advertising) and what the user may reasonably expect from the apparatus if used as intended.

NOTE 2: Degradation of performance during the test is understood as a degradation to a level not below a minimum performance level specified by the manufacturer for the use of the apparatus as intended. In some cases the specified minimum performance level may be replaced by a permissible degradation of performance. If the minimum performance level or the permissible performance degradation is not specified by the manufacturer then either of these may be derived from the product description and documentation (including leaflets and advertising) and what the user may reasonably expect from the apparatus if used as intended.

NOTE 3: No degradation of performance after the test is understood as no degradation below a minimum performance level specified by the manufacturer for the use of the apparatus as intended. In some cases the specified minimum performance level may be replaced by a permissible degradation of performance. After the test no change of actual operating data or user retrievable data is allowed. If the minimum performance level or the permissible performance degradation is not specified by the manufacturer then either of these may be derived from the product description and documentation (including leaflets and advertising) and what the user may reasonably expect from the apparatus if used as intended.

PERFORMANCE FOR TT

The performance criteria B shall apply, except for voltage dips of 100 ms and voltage interruptions of 5 000 ms duration, for which performance criteria C shall apply. Tests shall be repeated with the EUT in standby mode (if applicable) to ensure that unintentional transmission does not occur. In systems using acknowledgement signals, it is recognized that an acknowledgement (ACK) or not-acknowledgement (NACK) transmission may occur, and steps should be taken to ensure that any transmission resulting from the application of the test is correctly interpreted.

PERFORMANCE FOR TR

The performance criteria B shall apply, except for voltage dips of 100 ms and voltage interruptions of 5 000 ms duration for which performance criteria C shall apply. Where the EUT is a transceiver, under no circumstances, shall the transmitter operate unintentionally during the test. In systems using acknowledgement signals, it is recognized that an ACK or NACK transmission may occur, and steps should be taken to ensure that any transmission resulting from the application of the test is correctly interpreted.

PERFORMANCE FOR CT

The performance criteria A shall apply. Tests shall be repeated with the EUT in standby mode (if applicable) to ensure that unintentional transmission does not occur. In systems using acknowledgement signals, it is recognized that an Acknowledgement (ACK) or Not Acknowledgement (NACK) transmission may occur, and steps should be taken to ensure that any transmission resulting from the application of the test is correctly interpreted.

PERFORMANCE FOR CR

The performance criteria A shall apply. Where the EUT is a transceiver, under no circumstances, shall the transmitter operate unintentionally during the test. In systems using acknowledgement signals, it is recognized that an ACK or NACK transmission may occur, and steps should be taken to ensure that any transmission resulting from the application of the test is correctly interpreted.

4.2 GENERAL PERFORMANCE CRITERIA TEST SETUP

The EUT tested system was configured as the statements of **2.2** Unless otherwise a special operating condition is specified in the follows during the testing.

4.3 ESD TESTING

4.3.1 TEST SPECIFICATION

Basic Standard:	IEC/EN 61000-4-2
Discharge Impedance:	330 ohm / 150 pF
Required Performance	B
Discharge Voltage:	Air Discharge : 2kV/4kV/8kV Contact Discharge : 2kV/4kV (Direct/Indirect)
Polarity:	Positive & Negative
Number of Discharge:	Air Discharge: min. 20 times at each test point Contact Discharge: min. 200 times in total
Discharge Mode:	A/C Discharge
Discharge Period:	1 second minimum

4.3.2 TEST PROCEDURE

The test generator necessary to perform direct and indirect application of discharges to the EUT in the following manner:

a. Indirect application of the discharge:

Vertical Coupling Plane (VCP):

At least 10 single discharges (in the most sensitive polarity) shall be applied to the centre of one vertical edge of the coupling plane. The coupling plane, of dimensions 0,5 m x 0,5 m, is placed parallel to, and positioned at a distance of 0,1 m from, the EUT.

Discharges shall be applied to the coupling plane, with sufficient different positions such that the four faces of the EUT are completely illuminated. One VCP position is considered to illuminate 0,5 m x 0,5 m area of the EUT surface.

Horizontal Coupling Plane (HCP):

Discharge to the HCP shall be made horizontally to the edge of the HCP.

At least 10 single discharges (in the most sensitive polarity) shall be applied at the front edge of each HCP opposite the centre point of each unit (if applicable) of the EUT and 0.1m from the front of the EUT. The long axis of the discharge electrode shall be in the plane of the HCP and perpendicular to its front edge during the discharge.


The discharge electrode shall be in contact with the edge of the HCP before the discharge switch is operated

b. Direct application of discharges to the EUT

The test shall be performed with single discharges. On each pre-selected point at least 10 single discharges (in the most sensitive polarity) shall be applied.

For the time interval between successive single discharges an initial value of 1 s is recommended. Longer intervals may be necessary to determine whether a system failure has occurred.

4.3.3 TEST SETUP

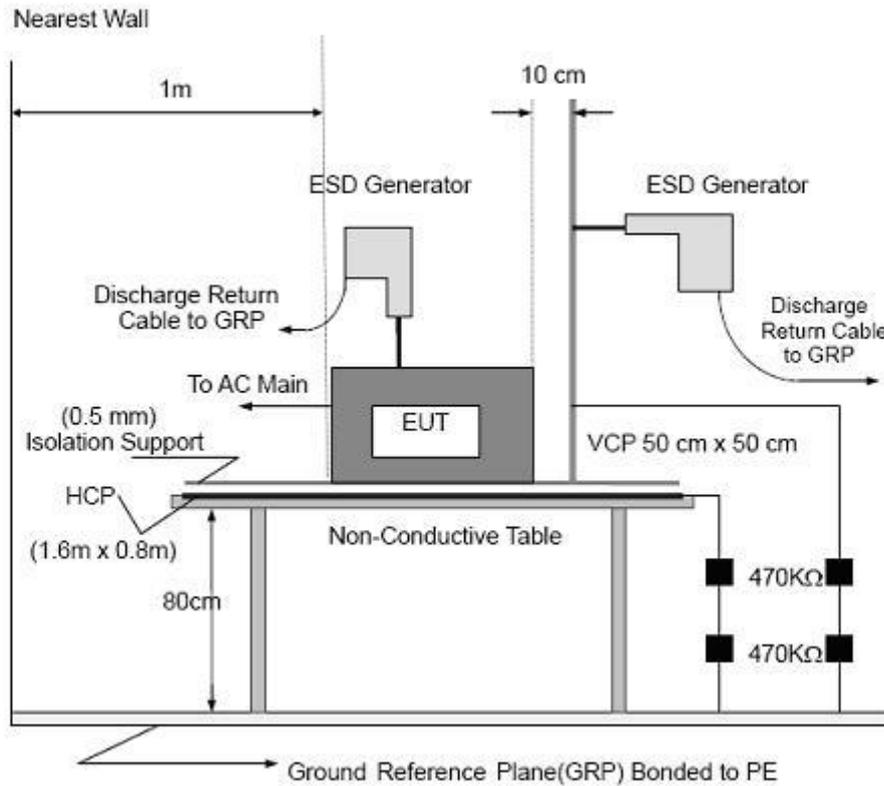

Note:

TABLE-TOP EQUIPMENT

The configuration consisted of a wooden table 0.8 meters high standing on the Ground Reference Plane. The GRP consisted of a sheet of aluminum at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system. A Horizontal Coupling Plane (1.6m x 0.8m) was placed on the table and attached to the GRP by means of a cable with 940k total impedance. The equipment under test, was installed in a representative system as described in section 7 of IEC /EN 61000-4-2, and its cables were placed on the HCP and isolated by an insulating support of 0.5mm thickness. A distance of 1-meter minimum was provided between the EUT and the walls of the laboratory and any other metallic structure.

FLOOR-STANDING EQUIPMENT

The equipment under test was installed in a representative system as described in section 7 of IEC/EN 61000-4-2, and its cables were isolated from the Ground Reference Plane by an insulating support of 0.1-meter thickness. The GRP consisted of a sheet of aluminum that is at least 0.25mm thick, and 2.5meters square connected to the protective grounding system and extended at least 0.5 meters from the EUT on all sides.

4.3.4 TEST RESULTS

EUT :	EcoFlow STREAM AC Pro, EcoFlow STREAM AC	Model Name :	EF-EA-AC-P2K-1200
Temperature :	25 °C	Relative Humidity :	45%
Pressure :	1010 hPa	Test Power :	AC 230V/50Hz
Test Mode	Mode 1/2/3/4/5		

Mode	Contact Discharge (Indirect)						Criterion	Result	
Test level (kV)	Test Point	2		4		6			
Test Location		+	-	+	-	+			-
HCP	Front	P	P	P	P			B	Complies
	Rear	P	P	P	P				
	Left	P	P	P	P				
	Right	P	P	P	P				
VCP	Front	P	P	P	P				
	Rear	P	P	P	P				
	Left	P	P	P	P				
	Right	P	P	P	P				

Mode 4/5

Mode	Air Discharge								Contact Discharge								Observation	Criterion	Result	
Test level(kV)	2		4		8		15		2		4		6		8					
Test Location	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-				
Gap	P	P	P	P	P	P												TT,TR	B	Complies
Button	P	P	P	P	P	P														
AC port	P	P	P	P	P	P														
Metal									P	P	P	P								

Mode 1/2/3

Mode	Air Discharge								Contact Discharge								Criterion	Result
	2		4		8		15		2		4		6		8			
Test level(kV)	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-		
Test Location	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-		
Gap	P	P	P	P	P	P											B	Complies
Button	P	P	P	P	P	P												
AC port	P	P	P	P	P	P												
Metal									P	P	P	P						

Note:

- 1) +/- denotes the Positive/Negative polarity of the output voltage.
- 2) In the table: 'P' represents 'PASS'; 'F' represents 'FAIL'.

4.4 RS TESTING

4.4.1 TEST SPECIFICATION

Basic Standard:	IEC/EN 61000-4-3
Required Performance	A
Frequency Range:	According to EN 301489-1: 80 MHz - 6000 MHz ; According to EN 55035: 80 MHz to 1000 MHz 1800 MHz 2600 MHz 3500 MHz 5000 MHz
Field Strength:	3 V/m
Modulation:	1kHz Sine Wave, 80%, AM Modulation
Frequency Step:	1 % of fundamental
Polarity of Antenna:	Horizontal and Vertical
Test Distance:	3 m
Antenna Height:	1.5 m
Dwell Time:	at least 3 seconds

4.4.2 TEST PROCEDURE

The EUT and support equipment, which are placed on a table that is 0.8 meter above ground and the testing was performed in a fully-anechoic chamber.


The testing distance from antenna to the EUT was 3 meters.

The other condition as following manner:


- a. The field strength level was 3V/m.
- b. The frequency range is swept from 80 MHz to 6000 MHz, 1800 MHz, 2600 MHz, 3500 MHz, 5000MHz with the signal 80% amplitude modulated with a 1kHz sine wave. The rate of sweep did not exceed 1.5×10^{-3} decade/s. Where the frequency range is swept incrementally, the step size was 1% of fundamental.
- c. Sweep Frequency 900 MHz, with the Duty Cycle: 1/8 and Modulation: Pulse 217 Hz (if applicable)
- d. The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.
- e. The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.4.3 TEST SETUP

Mobile Communication

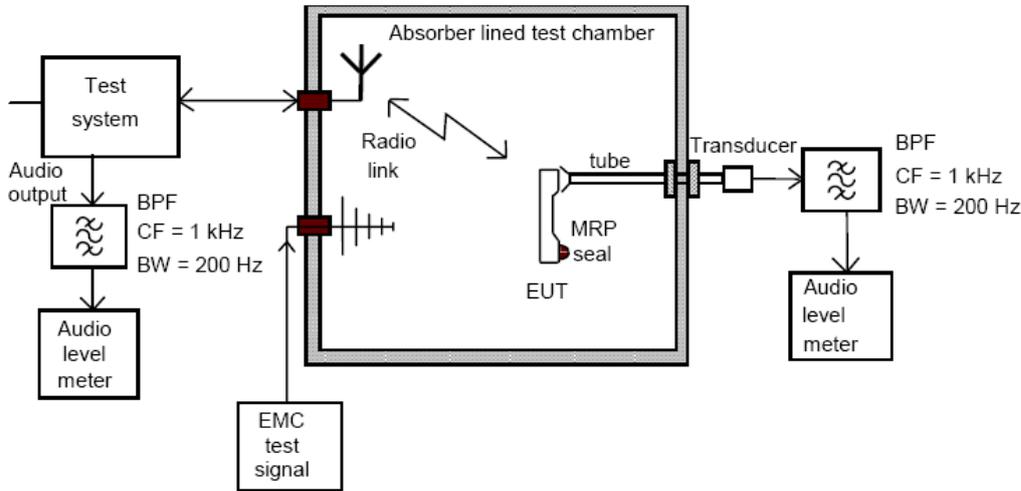

General Communication

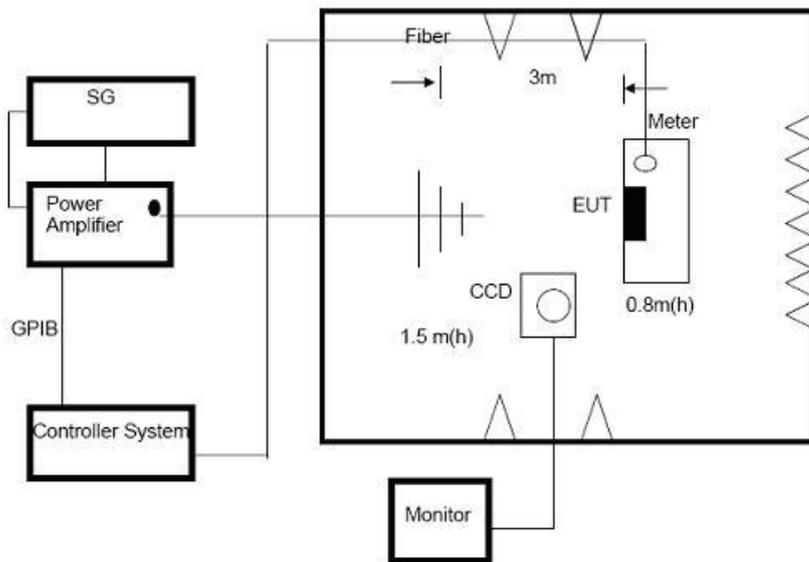

Note:

For the actual test configuration, please refer to the related Item –EUT Test Photos.

TABLE-TOP EQUIPMENT

The EUT installed in a representative system as described in section 7 of IEC/EN 61000-4-3 was placed on a non-conductive table 0.8 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

FLOOR-STANDING EQUIPMENT

The EUT installed in a representative system as described in section 7 of IEC/EN 61000-4-3 was placed on a non-conductive wood support 0.1 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

4.4.4 TEST RESULTS

EUT :	EcoFlow STREAM AC Pro, EcoFlow STREAM AC	Model Name :	EF-EA-AC-P2K-1200
Temperature :	25°C	Relative Humidity :	45%
Pressure :	1010 hPa	Test Power :	AC 230V/50Hz
Test Mode	Mode 1/2/3/4/5		

TEST RESULT

Mode 4/5

Frequency Range (MHz)	RF Field Position	R.F. Field Strength	Azimuth	Observation	Perform. Criteria	Results
80~1000	H / V	3 V/m (rms) AM Modulated 1000Hz, 80%	Front	CT,CR	A	P
			Rear			
			Left			
			Right			

Frequency Range (MHz)	RF Field Position	R.F. Field Strength	Azimuth	Observation	Perform. Criteria	Results
1000~6000	H / V	3 V/m (rms) AM Modulated 1000Hz, 80%	Front	CT,CR	A	P
			Rear			
			Left			
			Right			

Note:

1. The exclusion band has not been tested in 80MHz~6GHz.

The exclusion band for immunity testing of equipment operating in the 2,4 GHz band shall be: • lower limit of exclusion band = lowest allocated band edge frequency -120 MHz, i.e. 2 280 MHz; • upper limit of exclusion band = highest allocated band edge frequency +120 MHz, i.e. 2 603,5MHz.

2. "A" stand for, during test, operate as intended no loss of function, no degradation of performance, no unintentional transmissions and after test, no degradation of performance, no loss of function, no loss of stored data or user programmable functions.

Mode 1/2/3

Frequency Range (MHz)	RF Field Position	R.F. Field Strength	Azimuth	Perform. Criteria	Results
80~1000	H / V	3 V/m (rms) AM Modulated 1000Hz, 80%	Front	A	P
1000~6000			Rear		
1800			Left		
2600			Right		
3500					
5000					

Note: "A" stand for, during test, operate as intended no loss of function, no degradation of performance, no unintentional transmissions and after test, no degradation of performance, no loss of function, no loss of stored data or user programmable functions.

Note:

- 1) N/A - denotes test is not applicable in this test report.
- 2) There was not any unintentional transmission in standby mode
- 3) In the table: 'P' represents 'PASS'; 'F' represents 'FAIL'.

4.5 EFT/BURST TESTING

4.5.1 TEST SPECIFICATION

Basic Standard:	IEC/EN 61000-4-4
Required Performance	B
Test Voltage:	Power Line : 1 kV DC/Signal/wired network Line : 0.5 KV
Polarity:	Positive & Negative
Impulse Frequency:	For xDSL wired network ports: 100 kHz For DC/AC ports: 5 kHz
Impulse Wave shape :	5/50 ns
Burst Duration:	15 ms
Burst Period:	300 ms
Test Duration:	Not less than 1 min.



4.5.2 TEST PROCEDURE

The EUT and support equipment, are placed on a table that is 0.8 meter above a metal ground plane measured 1m*1m min. and 0.65mm thick min.

The other condition as following manner:

- a. The length of power cord between the coupling device and the EUT should not exceed 1 meter.
- b. Both positive and negative polarity discharges were applied.
- c. The duration time of each test sequential was 1 minute
- d. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.5.3 TEST SETUP

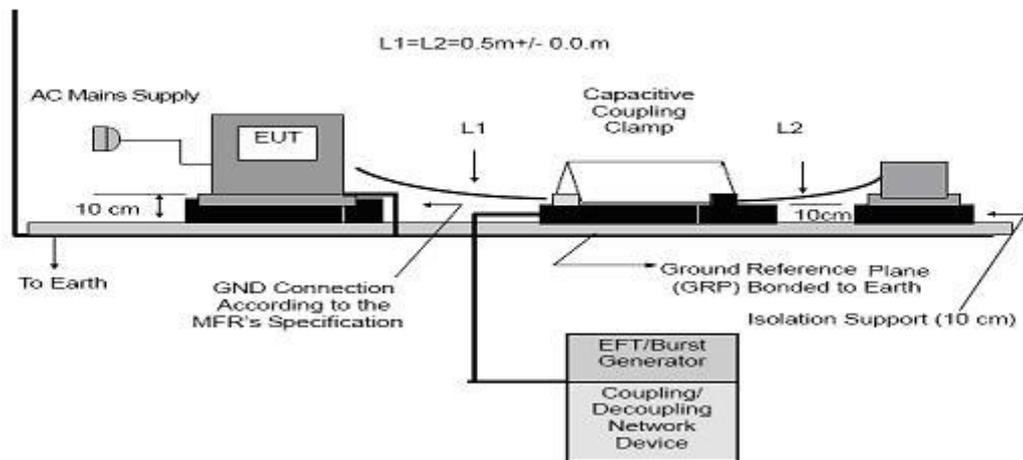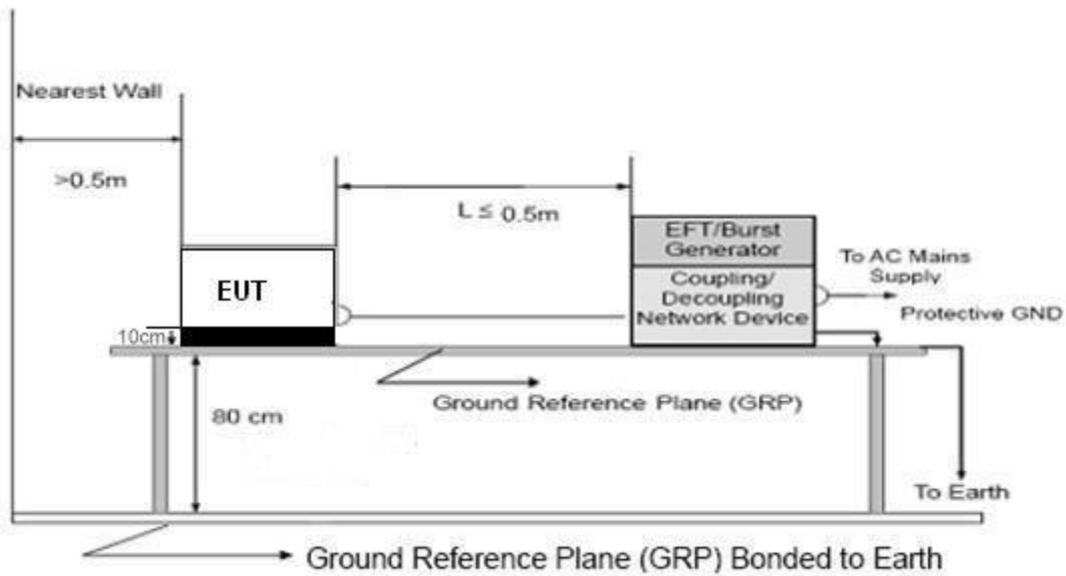

Note:

TABLE-TOP EQUIPMENT

The configuration consisted of a wooden table (0.8m high) standing on the Ground Reference Plane. The GRP consisted of a sheet of aluminum (at least 0.25mm thick and 2.5m square) connected to the protective grounding system. A minimum distance of 0.5m was provided between the EUT and the walls of the laboratory or any other metallic structure.

FLOOR-STANDING EQUIPMENT

The EUT installed in a representative system as described in section 7 of IEC/EN 61000-4-4 and its cables, were isolated from the Ground Reference Plane by an insulating support that is 0.1-meter thick. The GRP consisted of a sheet of aluminum (at least 0.25mm thick and 2.5m square) connected to the protective grounding system.

4.5.4 TEST RESULTS

EUT :	EcoFlow STREAM AC Pro, EcoFlow STREAM AC	Model Name :	EF-EA-AC-P2K-1200
Temperature :	25°C	Relative Humidity :	45%
Pressure :	1010 hPa	Test Power :	AC 230V/50Hz
Test Mode	Mode 1/2/3/4/5		

TEST RESULT

Mode 4/5

Coupling Line		Test level (kV)								Observation	Criterion	Result
		0.5		1		2		4				
		+	-	+	-	+	-	+	-			
AC line	L	P	P	P	P					TT,TR	B	Complies
	N	P	P	P	P							Complies
	PE	P	P	P	P							Complies
	L+N	P	P	P	P							Complies
	L+PE	P	P	P	P							Complies
	N+PE	P	P	P	P							Complies
	L+N+PE	P	P	P	P							Complies
DC Line												
Signal Line												

Mode 1/2/3

Coupling Line		Test level(kV)								Criterion	Result
		0.5		1		2		4			
		+	-	+	-	+	-	+	-		
ACline	L	P	P	P	P					B	Complies
	N	P	P	P	P						Complies
	PE	P	P	P	P						Complies
	L+N	P	P	P	P						Complies
	L+PE	P	P	P	P						Complies
	N+PE	P	P	P	P						Complies
	L+N+PE	P	P	P	P						Complies
DC Line											
Signal Line											

4.6 SURGE TESTING

4.6.1 TEST SPECIFICATION

Basic Standard:	IEC/EN 61000-4-5
Required Performance	B
Wave-Shape:	Combination Wave 1.2/50 us Open Circuit Voltage 8 /20 us Short Circuit Current
Test Voltage:	Power Line:0.5 kV, 1 kV, 2 kV
Surge Input/Output:	L-N, L-PE, N-PE
Generator Source:	2 ohm between networks
Impedance:	12 ohm between network and ground
Polarity:	Positive/Negative
Phase Angle:	0 /90/180/270
Pulse Repetition Rate:	1 time / min. (maximum)
Number of Tests:	5 positive and 5 negative at selected points

4.6.2 TEST PROCEDURE

a. For EUT power supply:

The surge is to be applied to the EUT power supply terminals via the capacitive coupling network. Decoupling networks are required in order to avoid possible adverse effects on equipment not under test that may be powered by the same lines, and to provide sufficient decoupling impedance to the surge wave. The power cord between the EUT and the coupling/decoupling networks shall be 2meters in length (or shorter).

b. For test applied to unshielded unsymmetrically operated interconnection lines of EUT:


The surge is applied to the lines via the capacitive coupling. The coupling /decoupling networks shall not influence the specified functional conditions of the EUT. The interconnection line between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).

c. For test applied to unshielded symmetrically operated interconnection /telecommunication lines of EUT:

The surge is applied to the lines via gas arrestors coupling. Test levels below the ignition point of the coupling arrester cannot be specified. The interconnection line between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).

d. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.6.3 TEST SETUP

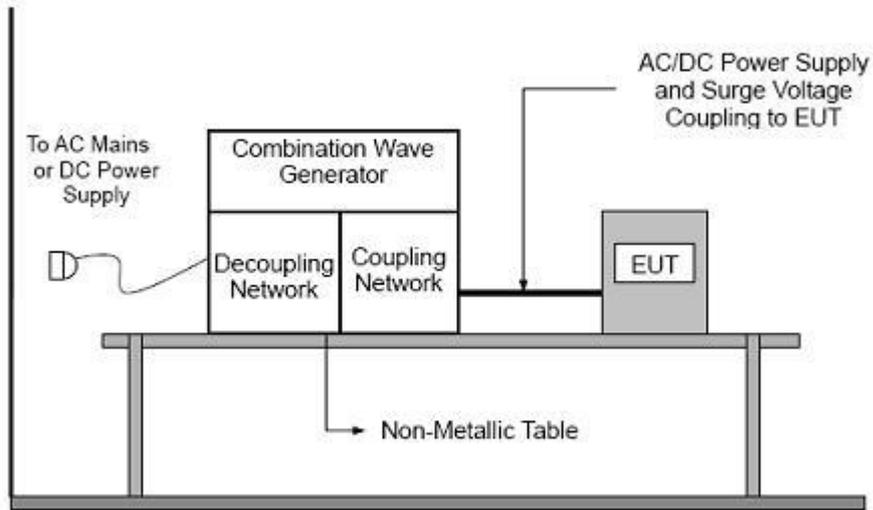

4.6.4 TEST RESULTS

EUT :	EcoFlow STREAM AC Pro, EcoFlow STREAM AC	Model Name :	EF-EA-AC-P2K-1200
Temperature :	25°C	Relative Humidity :	45%
Pressure :	1010 hPa	Test Power :	AC 230V/50Hz
Test Mode	Mode 1/2/3/4/5		

TEST RESULT

Mode 4/5

Coupling Line			Test level								Observation	Criterion	Result
			0.5 kV		1 kV		2 kV		4 kV				
			+	-	+	-	+	-	+	-			
AC line	L-N	0°	P	P	P	P					TT,TR	B	Complies
		90°	P	P	P	P							
		180°	P	P	P	P							
		270°	P	P	P	P							
	L-PE	0°	P	P	P	P	P	P					
		90°	P	P	P	P	P	P					
		180°	P	P	P	P	P	P					
		270°	P	P	P	P	P	P					
	N-PE	0°	P	P	P	P	P	P					
		90°	P	P	P	P	P	P					
		180°	P	P	P	P	P	P					
		270°	P	P	P	P	P	P					
DC Line													
Signal Line													

Mode 1/2/3

Coupling Line			Test level								Criterion	Result
			0.5 kV		1 kV		2 kV		4 kV			
			+	-	+	-	+	-	+	-		
ACline	L-N	0°	P	P	P	P					B	Complies
		90°	P	P	P	P						
		180°	P	P	P	P						
		270°	P	P	P	P						
	L-PE	0°	P	P	P	P	P	P				
		90°	P	P	P	P	P	P				
		180°	P	P	P	P	P	P				
		270°	P	P	P	P	P	P				
	N-PE	0°	P	P	P	P	P	P				
		90°	P	P	P	P	P	P				
		180°	P	P	P	P	P	P				
		270°	P	P	P	P	P	P				
DC Line												
Signal Line												

4.7 INJECTION CURRENT TESTING

4.7.1 TEST SPECIFICATION

Basic Standard:	IEC/EN 61000-4-6
Required Performance	A
Frequency Range:	0.15 MHz - 80 MHz
Field Strength:	3 Vr.m.s.
Modulation:	1kHz Sine Wave, 80%, AM Modulation
Frequency Step:	1 % of fundamental
Dwell Time:	at least 3 seconds

4.7.2 TEST PROCEDURE


The EUT and support equipment, are placed on a table that is 0.8 meter above a metal ground plane measured 1m*1m min. and 0.65mm thick min.


The other condition as following manner:

- a. The field strength level was 3V.
- b. The frequency range is swept from 150 KHz to 80 MHz, with the signal 80%amplitude modulated with a 1kHz sine wave. The rate of sweep did not exceed 1.5×10^{-3} decade/s. Where the frequency range is swept incrementally, the step size was 1% of fundamental.
- c. The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.
- d. For the actual test configuration, please refer to the related Item –EUT Test Photos.


4.7.3 TEST SETUP

Mobile Communication

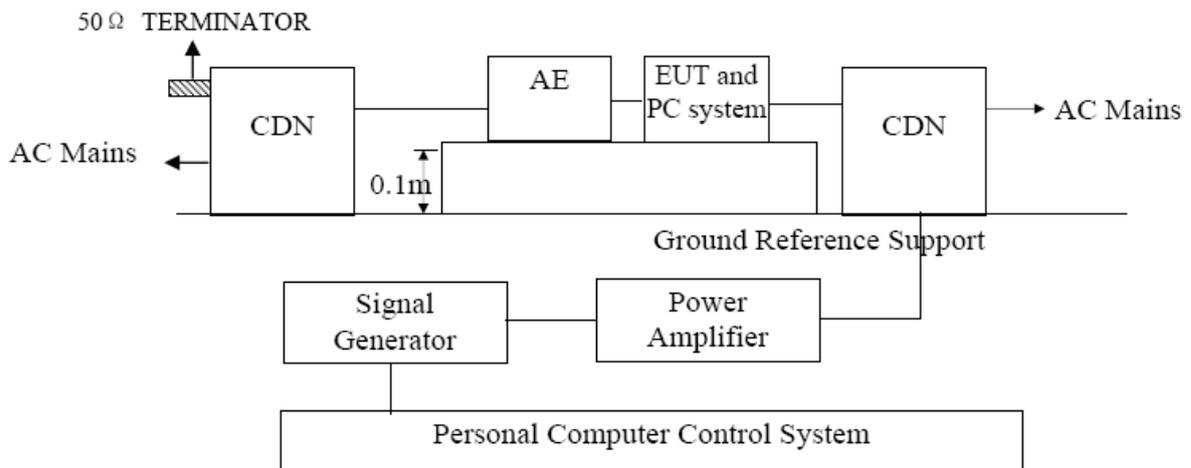

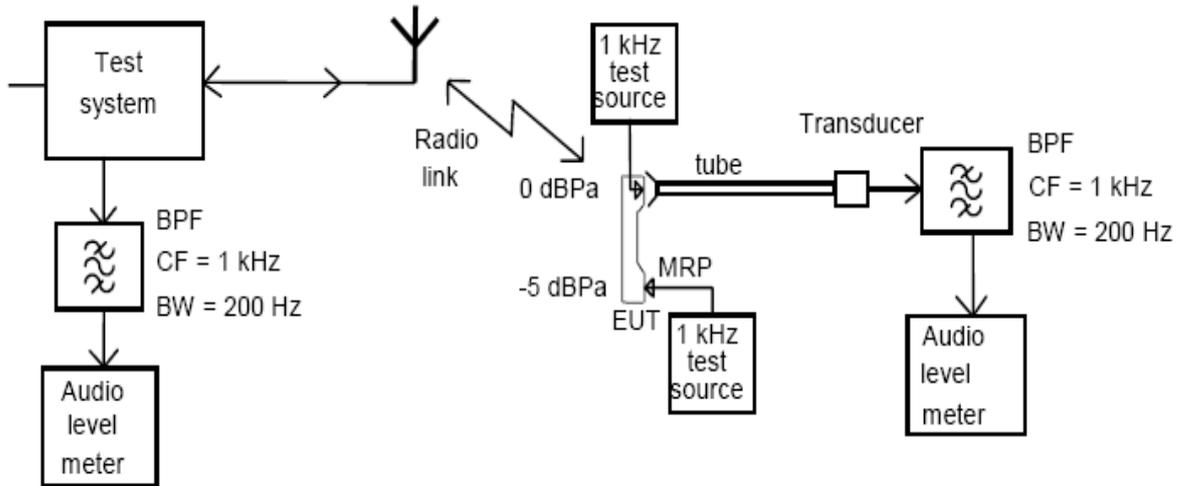

☒ General Communication

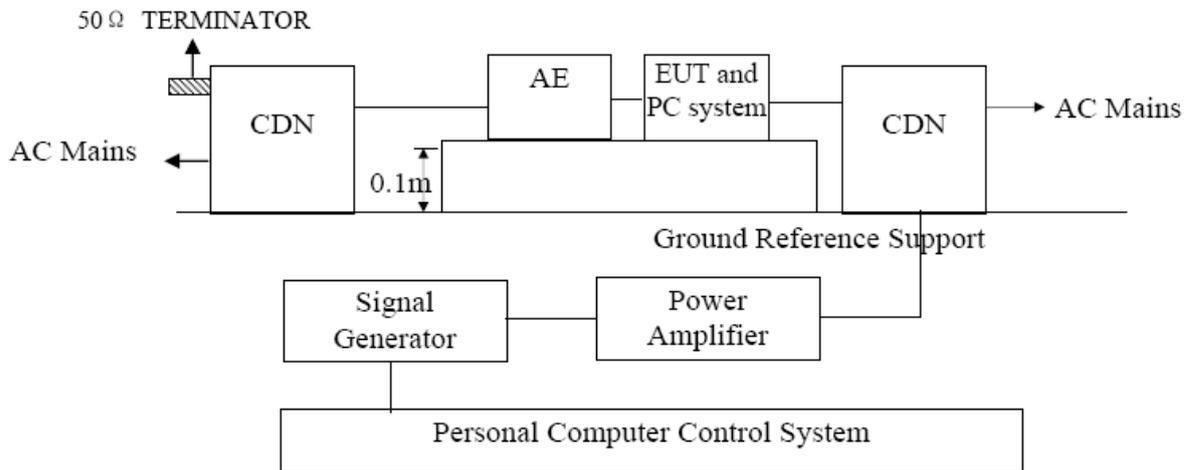

For the actual test configuration, please refer to the related Item –EUT Test Photos.

NOTE:

FLOOR-STANDING EQUIPMENT

The equipment to be tested is placed on an insulating support of 0.1 meters height above a ground reference plane. All relevant cables shall be provided with the appropriate coupling and decoupling devices at a distance between 0.1 meters and 0.3 meters from the projected geometry of the EUT on the ground reference plane.

4.7.4 TEST RESULTS

EUT :	EcoFlow STREAM AC Pro, EcoFlow STREAM AC	Model Name :	EF-EA-AC-P2K-1200
Temperature :	25°C	Relative Humidity :	45%
Pressure :	1010 hPa	Test Power :	AC 230V/50Hz
Test Mode	Mode 1/2/3/4/5		

TEST RESULT

Mode 4/5

Test Ports (Mode)	Freq.Range (MHz)	Field Strength	Observation	Perform. Criteria	Results
Input/ Output AC.PowerPort	0.15 ---80	3V(rms) AM Modulated 1000Hz, 80%	CT, CR	A	P
Input/ Output DC. PowerPort	0.15 --- 80		N/A	N/A	N/A
Signal Line	0.15 --- 80		N/A	N/A	N/A

Mode 1/2/3

Test Ports (Mode)	Freq.Range (MHz)	Field Strength	Perform. Criteria	Results
Input/ Output AC.PowerPort	0.15 ---80	3V(rms) AM Modulated 1000Hz, 80%	A	P
Input/ Output DC. PowerPort	0.15 --- 80		N/A	N/A
Signal Line	0.15 --- 80		N/A	N/A

Note: "A" stand for, during test, operate as intended no loss of function, no degradation of performance, no unintentional transmissions and after test, no degradation of performance, no loss of function, no loss of stored data or user programmable functions.

4.8 VOLTAGE INTERRUPTION/DIPS TESTING


4.8.1 TEST SPECIFICATION

Basic Standard:	IEC/EN 61000-4-11
Required Performance	100% reduction, 0.5 Cycle 100% reduction, 1.0 Cycle 30% reduction, 25 Cycles 30% reduction, 0.5 Cycle
Voltage Interruptions:	100% reduction, 250 Cycles
Test Duration Time:	Minimum three test events in sequence
Interval between Event:	Minimum ten seconds
Phase Angle:	0°/45°/90°/135°/180°/225°/270°/315°/360°
Test Cycle:	3 times

4.8.2 TEST PROCEDURE

The EUT shall be tested for each selected combination of test levels and duration with a sequence of three dips/interruptions with intervals of 10 s minimum (between each test event). Each representative mode of operation shall be tested. Abrupt changes in supply voltage shall occur at zero crossings of the voltage waveform.

4.8.3 TEST SETUP

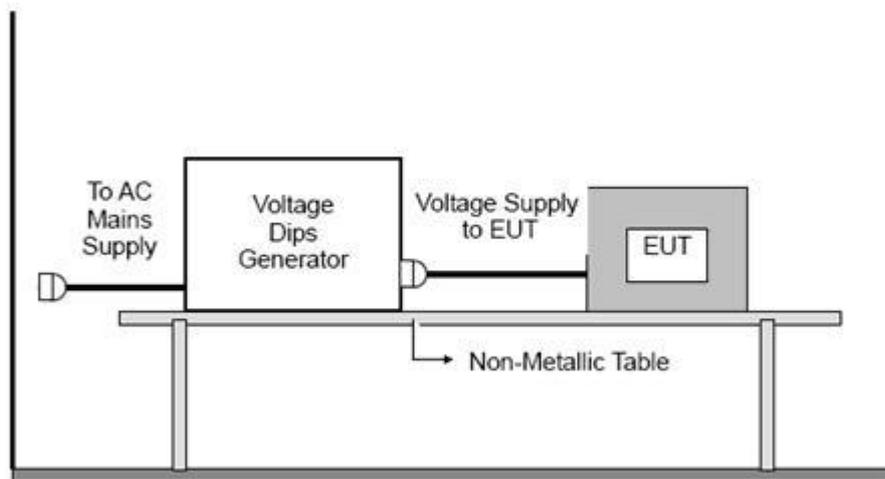

For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.8.4 TEST RESULTS

EUT :	EcoFlow STREAM AC Pro, EcoFlow STREAM AC	Model Name :	EF-EA-AC-P2K-1200
Temperature :	25°C	Relative Humidity :	45%
Pressure :	1010 hPa	Test Power :	AC 230V/50Hz
Test Mode	Mode 1/2/3/4/5		

TEST RESULT

Mode 4/5

VoltageReduction	Duration(ms)	Observation	PerformCriteria	Results
Voltage dip: 0%	10	TT, TR	B	P
Voltage dip:0%	20	TT, TR	B	P
Voltage dip:70%	500	TT, TR	C	P
Voltage interruptions: 0%	5000	TT, TR	C	P

Mode 1/2/3


VoltageReduction	Duration(ms)	PerformCriteria	Results
Voltage dip: 0%	10	B	P
Voltage dip:0%	20	B	P
Voltage dip:70%	500	C	P
Voltage interruptions: 0%	5000	C	P

Note:

- 1) There was not any unintentional transmission in standby mode
- 2) In the table: 'P' represents 'PASS'; 'F' represents 'FAIL'.

5. EUT TEST PHOTO

Radiated Measurement Photo

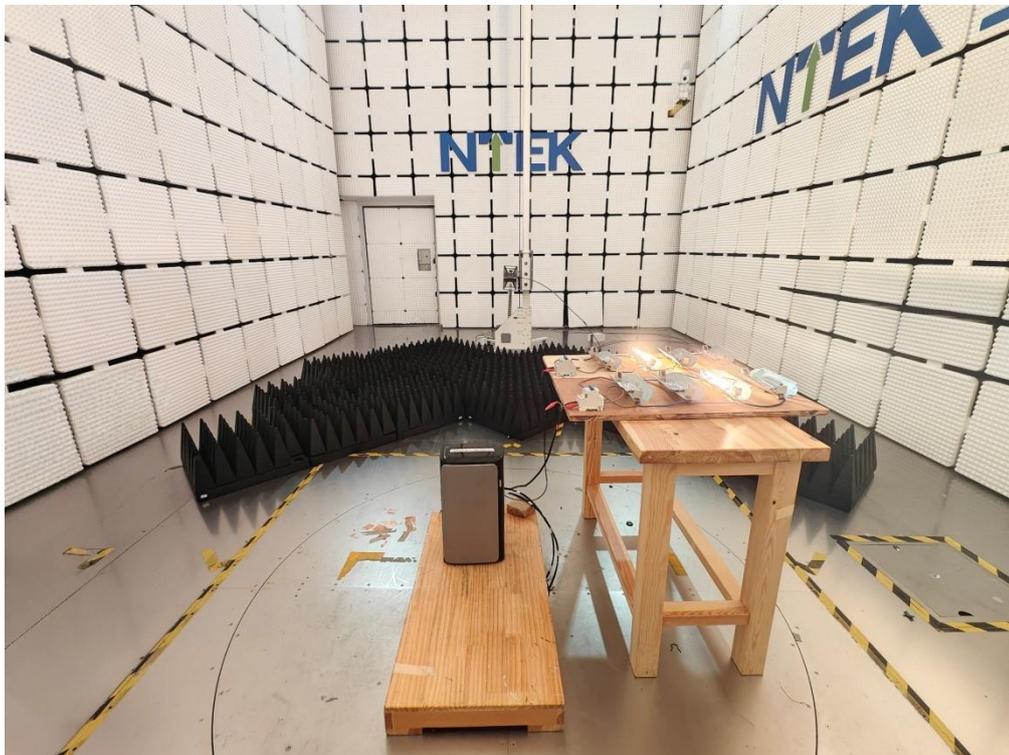

Conducted Measurement Photo



END OF REPORT