


Walraven RapidStrut® Angle Connector 45° (BUP1000)

(H2868)

to make Strut rail fabrications

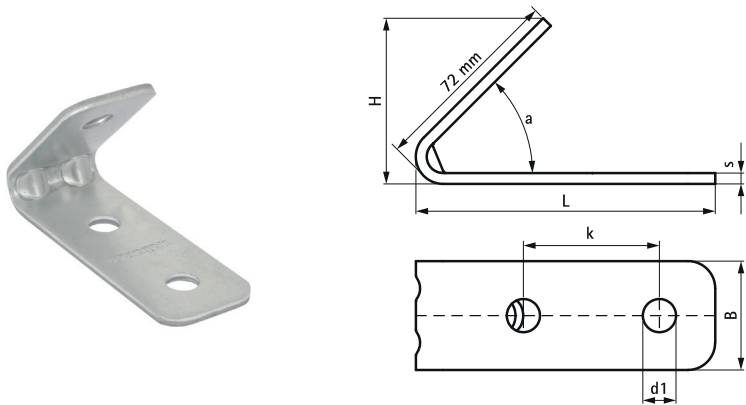

Features & benefits

- angle connector for all Walraven RapidStrut® rails to make fabrications
- the hole pattern is adapted to the hole pattern of Walraven RapidStrut® rails to use throughbolts
- user friendly by rounded edges
- with reinforced bend for extra strength
- material: steel 1.0242 (S250GD) + ZM310 MAC
- product is part of the Walraven Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227

| Product Number   | For Rail Type                     | Angle    | Total Width x Total Height x Total Length | Material Thickness | Width    | Fixing Hole | Heart To Heart Distance | Torque Moment For Installation |
|------------------|-----------------------------------|----------|-------------------------------------------|--------------------|----------|-------------|-------------------------|--------------------------------|
| Reference letter |                                   | <i>a</i> | <i>W x H x L</i>                          | <i>MT</i>          | <i>w</i> | <i>FH</i>   | <i>k</i>                | <i>T inst.</i>                 |
| Unit description |                                   | °        | mm x mm x mm                              | mm                 | mm       | mm          | mm                      | Nm                             |
| 66588270         | 41x21, 41x41, 41x51, 41x62, 41x82 | 45       | 40 x 60.9 x 110                           | 4.00               | 40       | 12.2        | 50                      | 30                             |