


# Walraven 2S Clamp (M8/10)

(B0524)

for insulated pipe, steel, cast iron and plastic (multilayer) pipe

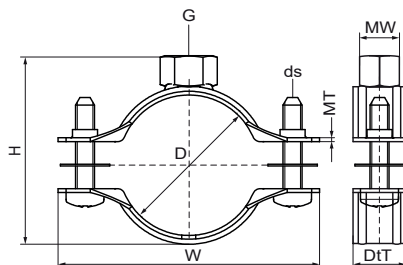

## Features & benefits

- gapless range
- anti loss washers prevent screws from falling out during installation
- perfect solution for insulated pipe supports
- material: steel
- zinc plated



| Product Number   | Outside Pipe Diameter | DN     | Pipe Diameter Imperial | Connection Thread | Total Height | Total Width | Total Depth | Material Width | Material Thickness | Screw Size | Maximum Allowed Load Faz | Approvals                             |
|------------------|-----------------------|--------|------------------------|-------------------|--------------|-------------|-------------|----------------|--------------------|------------|--------------------------|---------------------------------------|
| Reference Letter | D                     | D      | D                      | G                 | H            | W           | DtT         | MW             | MT                 | ds         | Fo,z                     |                                       |
| Unit description | mm                    |        | "                      |                   | mm           | mm          | mm          | mm             | mm                 |            | N                        |                                       |
| 33035014         | 10 - 14               | -      | -                      | M8/M10            | 35           | 46          | 20          | 20             | 1.00               | M5         | 700                      | ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD |
| 33035019         | 15 - 19               | DN 10  | 3/8                    | M8/M10            | 40           | 51          | 20          | 20             | 1.00               | M5         | 700                      | ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD |
| 33035024         | 20 - 24               | DN 15  | 1/2                    | M8/M10            | 45           | 56          | 20          | 20             | 1.00               | M5         | 700                      | ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD |
| 33035030         | 25 - 30               | DN 20  | 3/4                    | M8/M10            | 51           | 62          | 20          | 20             | 1.00               | M5         | 700                      | ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD |
| 33035037         | 31 - 37               | DN 25  | 1                      | M8/M10            | 58           | 69          | 20          | 20             | 1.00               | M5         | 700                      | ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD |
| 33035046         | 38 - 46               | DN 32  | 1 1/4                  | M8/M10            | 67           | 77          | 20          | 20             | 1.25               | M5         | 950                      | ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD |
| 33035052         | 47 - 52               | DN 40  | 1 1/2                  | M8/M10            | 73           | 84          | 20          | 20             | 1.25               | M5         | 950                      | ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD |
| 33035061         | 53 - 61               | DN 50  | 2                      | M8/M10            | 82           | 93          | 20          | 20             | 1.25               | M5         | 950                      | ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD |
| 33035067         | 62 - 67               | -      | -                      | M8/M10            | 88           | 99          | 20          | 20             | 1.25               | M5         | 950                      | ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD |
| 33035074         | 68 - 74               | -      | -                      | M8/M10            | 96           | 111         | 20          | 20             | 1.50               | M6         | 1,400                    | ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD |
| 33035081         | 75 - 81               | DN 65  | 2 1/2                  | M8/M10            | 103          | 118         | 20          | 20             | 1.50               | M6         | 1,400                    | ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD |
| 33035087         | 82 - 87               | -      | -                      | M8/M10            | 109          | 124         | 20          | 20             | 1.50               | M6         | 1,400                    | ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD |
| 33035095         | 88 - 95               | DN 80  | 3                      | M8/M10            | 119          | 136         | 23          | 23             | 2.00               | M6         | 2,000                    | ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD |
| 33035103         | 96 - 103              | -      | -                      | M8/M10            | 127          | 143         | 23          | 23             | 2.00               | M6         | 2,000                    | ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD |
| 33035112         | 104 - 112             | -      | -                      | M8/M10            | 136          | 153         | 23          | 23             | 2.00               | M6         | 2,000                    | ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD |
| 33035118         | 113 - 118             | DN 100 | 4                      | M8/M10            | 142          | 159         | 23          | 23             | 2.00               | M6         | 2,000                    | ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD |
| 33035127         | 119 - 127             | -      | -                      | M8/M10            | 151          | 168         | 23          | 23             | 2.00               | M6         | 2,000                    | ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD |
| 33035137         | 128 - 137             | -      | -                      | M8/M10            | 161          | 178         | 23          | 23             | 2.00               | M6         | 2,000                    | ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD |
| 33035144         | 138 - 144             | DN 125 | 5                      | M8/M10            | 168          | 185         | 23          | 23             | 2.00               | M6         | 2,000                    | ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD |
| 33035153         | 145 - 153             | -      | -                      | M8/M10            | 177          | 194         | 23          | 23             | 2.00               | M6         | 2,000                    | ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD |
| 33035162         | 154 - 162             | -      | -                      | M8/M10            | 186          | 203         | 23          | 23             | 2.00               | M6         | 2,000                    | ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD |

Walraven 2S Clamp (M8/10)

(B0524)

for insulated pipe, steel, cast iron and plastic (multilayer) pipe

| Product Number   | Outside<br>Pipe<br>Diameter | DN     | Pipe<br>Diameter<br>Imperial | Connection<br>Thread | Total<br>Height | Total<br>Width | Total<br>Depth | Material<br>Width | Material<br>Thickness | Screw<br>Size | Maximum<br>Allowed<br>Load<br>Faz | Approvals                             |
|------------------|-----------------------------|--------|------------------------------|----------------------|-----------------|----------------|----------------|-------------------|-----------------------|---------------|-----------------------------------|---------------------------------------|
| Reference Letter | D                           | D      | D                            | G                    | H               | W              | DtT            | MW                | MT                    | ds            | Fa,z                              |                                       |
| Unit description | mm                          |        | "                            |                      | mm              | mm             | mm             | mm                | mm                    |               | N                                 |                                       |
| 33035172         | 163 - 172                   | DN 150 | 6                            | M8/M10               | 199             | 217            | 25             | 25                | 2.50                  | M6            | 3,300                             | ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD |
| 33035183         | 173 - 183                   | -      | -                            | M8/M10               | 210             | 227            | 25             | 25                | 2.50                  | M6            | 3,300                             | ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD |
| 33035194         | 184 - 194                   | -      | -                            | M8/M10               | 221             | 239            | 25             | 25                | 2.50                  | M6            | 3,300                             | ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD |
| 33035205         | 195 - 205                   | -      | -                            | M8/M10               | 232             | 249            | 25             | 25                | 2.50                  | M6            | 3,300                             | ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD |
| 33035216         | 206 - 216                   | -      | -                            | M8/M10               | 243             | 260            | 25             | 25                | 2.50                  | M6            | 3,300                             | ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD |
| 33035225         | 217 - 225                   | DN 200 | 8                            | M8/M10               | 253             | 271            | 25             | 25                | 2.50                  | M6            | 3,300                             | ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD |