

Concord

OPTIX LINEAR RECESSED 1200 TW ALU SSC

2023795



Features

- OPTIX LINEAR RECESSED 1200 TW ALU SSC is a high efficacy low glare linear luminaire for office and education applications. Suitable for continuous light line installations with accessories separately available. Ceiling recessed 1146x95x90 mm. Aluminised plastic extra low glare optics in a single line configuration. White RAL9016 fixture body. SylSmart Standalone colour control and dimming. Tunable white colour 3000-6000K, CRI>80, chromaticity tolerance of 3-step MacAdam ellipse. Luminous flux 2200lm. Power consumption 22W. Luminaire efficacy 100lm/W. Lifespan: 48,500 hours L90B10. UGR<19, Luminance at 65°<200 Cd/m², IK07, IP20. Ultra Low Flicker: <5% Photobiological safety risk group 1. Electrical protection Class I. Glow wire test 850°C. Suitable for use with Linect quick connection systems.

Product Overview

Product name	OPTIX LINEAR RECESSED 1200 TW ALU SSC
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
General application	Education, Office
ETIM Class	EC002892
Fixture luminous flux (lm)	2200
Luminous flux (lm)	2200
Luminaire efficacy (lm/W)	105
Light colour	Tuneable White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3

Concord
by SYLVANIA


Concord

OPTIX LINEAR RECESSED 1200 TW ALU SSC

2023795

Glare control	< 16
Photobiological Risk Group	RG1
Total power consumption (W)	22
Electrical protection	Class I
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9016
IP rating	IP20
IK rating	IK07
Product EAN number	5025768237951
Warranty	5 years
Dimming method	SylSmart SSC
Useful luminous flux (#use)	2200

Photometry

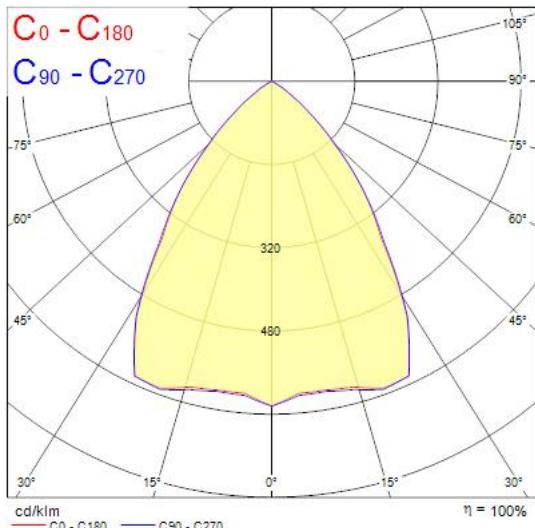

Technical drawings

