


# OPTIX LINEAR RECESSED 1200 TW ALU DALI EM

Item No: 2023794


Concord

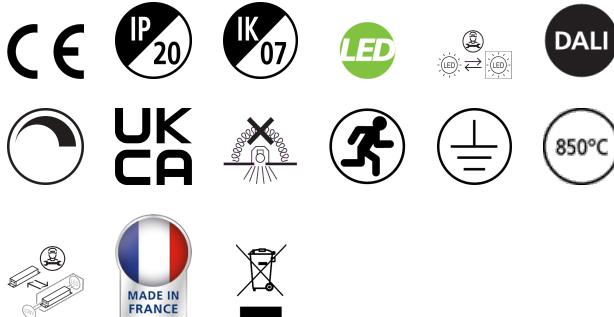



OPTIX LINEAR RECESSED 1200 TW ALU DALI EM is a high efficacy low glare linear luminaire for office and education applications. Suitable for continuous light line installations with accessories separately available. Ceiling recessed 1146x95x90 mm. Aluminised plastic extra low glare optics in a single line configuration. White RAL9016 fixture body. 3hr maintained emergency version with DALI monitoring capability. DALI DT8 colour control and dimming. Tunable white colour 3000-6000K, CRI>80, chromaticity tolerance of 3-step MacAdam ellipse. Luminous flux 2200lm. Power consumption 24W. Luminaire efficacy 92lm/W. Lifespan: 48,500 hours L90B10. UGR<19, Luminance at 65°<200 Cd/m<sup>2</sup>, IK07, IP20. Ultra Low Flicker: <5% Photobiological safety risk group 1. Electrical protection Class I. Glow wire test 850°C. Suitable for use with Linect quick connection systems.

## Technical Assets

### Dimensions (mm)

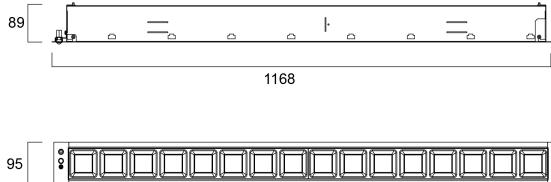

### Photometrics

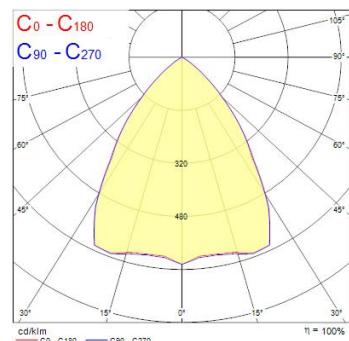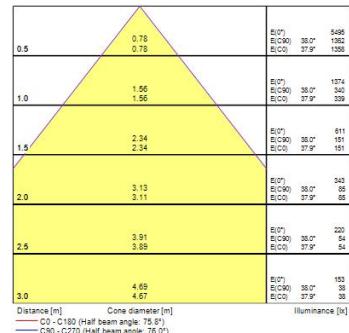

# OPTIX LINEAR RECESSED 1200 TW ALU DALI EM

Item No: 2023794

Concord

## General data

Product name	OPTIX LINEAR RECESSED 1200 TW ALU DALI EM
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
General application	Education, Office
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
Warranty	5 years

## Optical data

Useful luminous flux (Φuse)	2200
Fixture luminous flux (Im)	2200
Luminous flux (Im)	2200
Luminaire efficacy (Im/W)	92
Light colour	Tunable White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 16
Photobiological Risk Group	RG1
Luminous flux (emergency) (Im)	80
Emergency duration (h)	3

## Electrical data

Total power consumption (W)	24
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.97
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	10
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	DALI
Drive current (mA)	400
Inrush Current (A)	29
Inrush Duration (μs)	180
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	21
Max. products per 13A C Breaker	28
Max. products per 16A C Breaker	36
Max. products per 20A C Breaker	45
Max. products per 10A B Breaker	13
Max. products per 13A B Breaker	17
Max. products per 16A B Breaker	22
Max. products per 20A B Breaker	27
Connectable conductor cross section - Min (mm <sup>2</sup> )	2.5
Connectable conductor cross section - Max (mm <sup>2</sup> )	2.5

## Lifetime data

Lifespan L70 B50	120000
Lifespan L80 B20	107500
Lifespan L90 B10	48500

# OPTIX LINEAR RECESSED 1200 TW ALU DALI EM

Item No: 2023794

Concord

## Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Diffuser finish	Matt/satinized
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1169
Nominal Product Width (mm)	95
Nominal Product Height (mm)	90
Weight (kg)	3.15

## Packaging

Product EAN number	5025768237944
Packaging single length / height (cm)	119.0
Packaging single width (cm)	10.0
Packaging single depth (cm)	11.0
DUN14 (inner)	05025768237944
Units per outer package	1
Packaging outer length / height (cm)	119.0
Packaging outer width (cm)	10.0
Packaging outer depth (cm)	11.0

## Safety data

Glow Wire Test (°C)	850
---------------------	-----