


## Walraven Duplo KS

(C1055)

for heating pipes

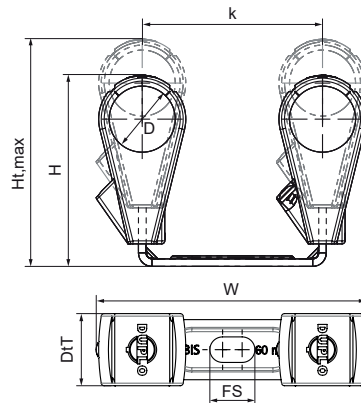

### Features & benefits

- two clamps on connection bracket
- clamps can be repositioned when open or closed - only fixed when finally secured
- plastic clamp prevents noises which arise from expansion or contraction of the pipe
- adjustable distance between pipe and wall
- locking screw connected to band, which makes it impossible to lose screw
- material: connection bracket made of steel; connector made of PP (polypropylene)
- fire class B2
- recyclable, resistant to UV and ageing
- zinc plated
- temperature resistance from approx. -30 °C to approx. +90 °C (constant); short to approx. +110 °C

## EPD

| Product Number   | Outside Pipe Diameter | Total Height | Total Width | Total Depth | Maximum Height | Fixing Slot | Heart To Heart Distance | Max. Wall Distance Center Clamp | Min. Wall Distance Center Clamp | Maximum Allowed Load Faz | Maximum Allowed Load Fax |
|------------------|-----------------------|--------------|-------------|-------------|----------------|-------------|-------------------------|---------------------------------|---------------------------------|--------------------------|--------------------------|
| Reference Letter | D                     | H            | W           | DtT         | Ht,max         | FS          | k                       |                                 |                                 | Fa,z                     | Fa,x                     |
| Unit description | mm                    | mm           | mm          | mm          | mm             | mm          | mm                      | mm                              | mm                              | N                        | N                        |
| 3225015          | 15                    | 56           | 85          | 24          | 69             | 15x8,5      | 60                      | 57                              | 57                              | 220                      | 130                      |
| 3225022          | 22                    | 64           | 92          | 24          | 76             | 15x8,5      | 60                      | 61                              | 64                              | 220                      | 130                      |