


Walraven Pipe Reinforcement

(K3505)

support for plastic pipe

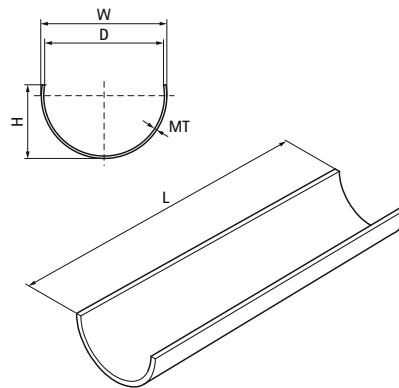

Features & benefits

- self-gripping and continuous support for plastic pipes to prevent unsatisfactory deflections
- allows for longer distance between supports (fixing distance with reinforcement is 1.5 times longer than the distance without reinforcement)
- controls direction of pipe expansion. Maintains alignment of pipe, and prohibits "snaking"
- reinforcement fits inside insulation
- lightweight and economical, also 3 meter lengths are easy to handle
- eases handling and speeds installation of PEX tubing
- can be cut with hand tools
- material: steel 1.0226
- pre-galvanized
- to be used with e.g. BISMAT® 5000 and Bifix® 5000

Product Number	Outside Pipe Diameter	Total Width x Total Height x Total Length	Material Thickness	Self Clamping?
Reference letter	D	WxHxL	MT	
Unit description	mm	mm x mm x mm	mm	
0635316	16	18 x 11 x 3,000	0.80	Yes
0635320	20	22 x 13 x 3,000	0.80	Yes
0635325	25	27 x 16 x 3,000	0.80	Yes
0635326	26	26 x 17 x 3,000	0.80	Yes
0635332	32	34 x 20 x 3,000	0.80	Yes
0635340	40	42 x 25 x 3,000	0.80	Yes
0635350	50	52 x 31 x 3,000	0.80	Yes
0635356	56	58 x 28 x 3,000	0.80	No
0635363	63	63 x 38 x 3,000	0.80	Yes
0635375	75	77 x 45 x 3,000	0.80	Yes
0635390	90	92 x 54 x 3,000	0.80	Yes
0635391	110	110 x 66 x 3,000	0.80	Yes
0635392	125	127 x 125 x 3,000	0.80	No
0635393	160	162 x 81 x 3,000	0.80	No