


Data Sheet | Item Number: 706-2500/500-100

System cable; for Siemens S7-1500; 4 analog outputs (current); Length: 1 m; Conductor cross-section: 0.25 mm²

<https://www.wago.com/706-2500/500-100>

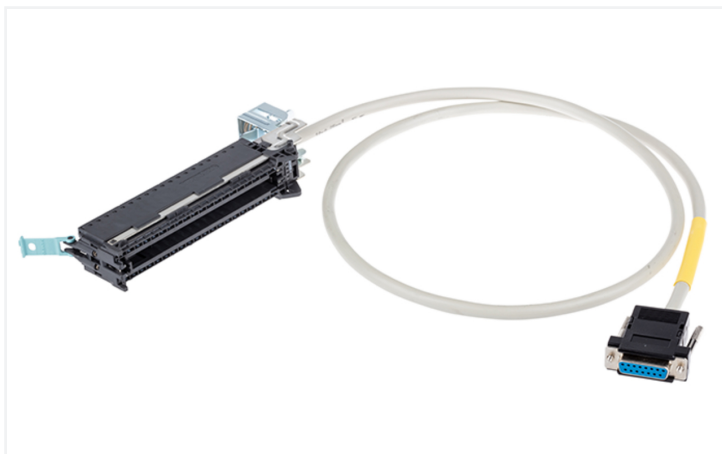

Color coding acc. to DIN VDE 47100	15 poles Sub-D connector		PLC connector	
	Pin number	Wiring	Pin number	Signal
White	1	0+	1	QI0
Brown	2	0-	4	Mana
Green	3	1+	5	QI1
Yellow	4	1-	8	Mana
Grey	5	2+	9	QI2
Pink	6	2-	12	Mana
Blue	7	3+	13	QI3
Red	8	3-	16	Mana
Black	9	+(24V)	41	L+
Violet	10	-(0V)	44	M
Grey-Pink	11	nc	nc	nc
Red-Blue	12	nc	nc	nc
White-Green	13	nc	nc	nc
Brown-Green	14	1	nc	nc
White-Yellow	15	nc	nc	nc
Shield			Connected to Sub-D	

Notes

Note When using more than 10 wires, the maximum current per wire must be reduced to 1 A.

Electrical data

Inputs/outputs	4 analog outputs; current
Operating voltage	≤ 35 VAC/VDC
Current per wire (max.)	2 A

Compatibility

Siemens

Siemens S7-1500	6ES7 532-5HD00-0AB0 6ES7 532-5ND00-0AB0
-----------------	--

Connection Data

Cable type	LiYCY
Color code	per DIN VDE 47100

Connection 1

Pluggable connector	D-subminiature female connector
Pole number 1	15
Connection type	System
Wire cross-section	0.25 mm ²

Connection 2

Connector	Siemens 6ES7-592-1BM00-0XB0
Pole number	40
Connection type	System
Wire cross-section	0.25 mm ²

Physical data

Cable length	1 m
--------------	-----

Material data

Fire load	0 MJ
Weight	248 g

Environmental requirements

Ambient temperature (operation)	-20 ... +50 °C
---------------------------------	----------------

Commercial data

PU (SPU)	1 pcs
Packaging type	Box
Country of origin	FR
GTIN	4050821892038
Customs tariff number	85444290900

Product Classification

UNSPSC	26121604
ETIM 9.0	EC000237
ETIM 10.0	EC000237
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product
Compliance
706-2500/500-100



Documentation

System Description

WAGO System Wiring,
Selection Guide

pdf
533.15 KB

