
Walraven Wall Mounting Set 62|H + Support

(H1925)

universal Mounting Set for outdoor appliances

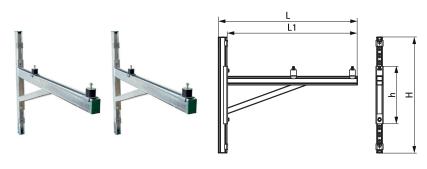

Features & benefits

- suitable for indoor and outdoor use
- universal mounting brackets for fixing indoor and outdoor appliances to the wall
- designed for the most common standard heat pumps (for heat pump models with female thread, Walraven Wall Mounting ISO Kit 6901998 needs to be ordered separately - see assembly instruction)
- stepless adjustable in height and wall distance
- with anti-vibration mounts type Walraven VibraTek® SB-MM
- material: steel 1.0332
- material: vibration damper; rubber SBR + NR 55°+-5 Shore A steel class 4.8
- surface treatment: hot dip galvanized (EN-ISO 1461)
- set consists of: 2 Cantilever Arms type RapidStrut 62|H with welded support- 2 lengths of 500mm wall rail type RapidStrut 62|H- 4 vibration dampers with pre-assembled fasteners- 6 rail endcaps- fasteners to connect Cantilever Arms to the wall rail
- Max. allowed safeload per Set: 1.750 Newton (Total weight of the unit).

| Product Number | Туре | Length | Total Width x Total Height x Total Length | Material Thickness | Anchoring Slot | Heart To Heart Distance |
|------------------|------------------|--------|--|--------------------|----------------|-------------------------|
| Reference letter | - | - I | WxHxL | MT | AS | <u>k</u> |
| Unit description | | mm | mm x mm x mm | mm | mm | mm |
| 6901990 | 62 H + Support | 900 | 106 x 808 x 972 | 3.00 | 30x11 | 141 |