

Features

- Simple and slick integral design with no driver box and without any visible screws

New technology utilization for improved performance
Extremely precise light beams due to the high-quality lenses #80mm die-cast aluminium body, Fix beam angle: 55° , Textured white finishing colour Light color temperature: 2700K, candle light System power: 18W, Fixture lumen output: 1250lm, efficacy: 69lm/W, Ra97 typical, LED chromacity: 2 step MacAdam ellipse LED source (SDCM2), IR/UV free light source without heat radiation Operating voltage 220-240V / 50-60Hz, electronic driver, dimmable via SylSmart Standalone SSC Surface mounting with surface mounting base. Electrical protection: Class II. Degree of protection: IP20, suitable for indoor environment only Horizontal rotation: 355°, vertical tilt: 90° Nominal product dimensions: D.80mmx200mm 5 years warranty. Suitable for ceiling surface mounting, and wall surface mounting


Product Overview

| | |
|----------------------------|--|
| Product name | CONCORD BEACON 2700K SM WIDE SSC WHITE |
| Technology | LED |
| Cap/Base | N/A |
| Housing | Aluminium |
| Mount | Ceiling surface mounting, Wall surface mounted |
| Fixture rating | Enclosed |
| General application | Museums & Galleries, Retail, Hospitality |
| ETIM Class | EC001744 |
| Fixture luminous flux (lm) | 1250 |
| Luminaire efficacy (lm/W) | 69 |
| LOR (%) | 100 |

CONCORD BEACON 2700K SM WIDE SSC WHITE 2062511

| | |
|-----------------------------------|-----------------------------|
| Correlated colour temperature (k) | 2700 |
| Light colour | Candlelight |
| CRI (Ra) | 97 |
| Colour Variation Initial (SDCM) | 2 |
| Beam Angle (°) | 55 |
| Photobiological Risk Group | RG1 |
| Total power consumption (W) | 18 |
| Electrical protection | Class II |
| Control gear type | LED driver constant current |
| Dimmable | Yes |
| Minimum dimming level (%) | 1 |
| Housing colour | RAL9016 |
| IP rating | IP20 |
| IK rating | IK02 |
| Product EAN number | 5025768625116 |
| Warranty | 5 years |
| Dimming method | SylSmart SSC |
| Useful luminous flux (#use) | 1250 |

Photometry

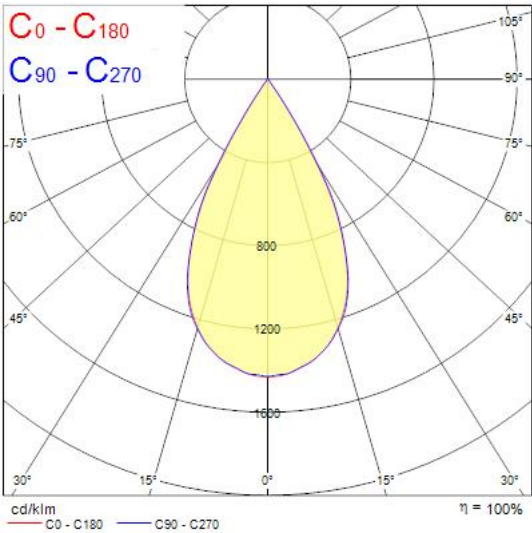

Technical drawings

