


Data Sheet | Item Number: 706-3340/501-300
 System cable; for Schneider Modicon M340; 6 analog inputs or outputs (voltage);
 Length: 3 m; Conductor cross-section: 0.25 mm²

<https://www.wago.com/706-3340/501-300>

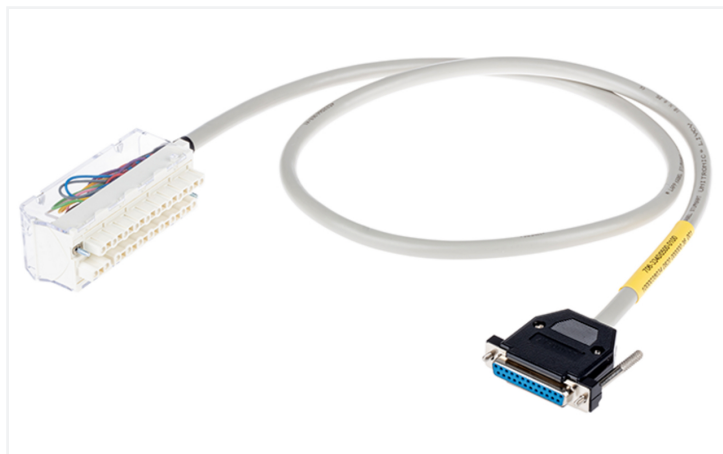

Color coding acc. to DIN VDE 47100	25 poles Sub-D connector		PLC connector	
	Pin number	Wiring	Pin number	Signal
White	1	IN0+	1	IN0+
Brown	2	IN0-	5	IN0-
Green	3	IN1+	6	IN1+
Yellow	4	IN1-	8	IN1-
Grey	5	IN2+	9	IN2+
Pink	6	IN2-	11	IN2-
Blue	7	IN3+	12	IN3+
Red	8	IN3-	14	IN3-
Black	9	OUT4+	17	OUT+
Violet	10	OUT4-	18	OUT-
Grey-Pink	11	OUT5+	19	OUT+
Red-Blue	12	OUT5-	20	OUT-
White-Green	13	nc	nc	nc
Brown-Green	14	nc	nc	nc
White-Yellow	15	nc	nc	nc
Yellow-Brown	16	nc	nc	nc
White-Grey	17	nc	nc	nc
Grey-Brown	18	nc	nc	nc
White-Pink	19	nc	nc	nc
Pink-Brown	20	nc	nc	nc
White-Blue	21	nc	nc	nc
Brown-Blue	22	nc	nc	nc
White-Red	23	nc	nc	nc
Brown-Red	24	nc	nc	nc
White-Black	25	nc	nc	nc
Shield		Connected to Sub-D		

Similar to illustration

Notes

Note When using more than 10 wires, the maximum current per wire must be reduced to 1 A.

Electrical data

Inputs/outputs	6 analog inputs or outputs; voltage
Operating voltage	≤ 35 VAC/VDC
Current per wire (max.)	2 A

Compatibility

Schneider

Schneider Modicon M340	BMX AMM 0600
------------------------	--------------

Connection Data

Cable type	LiYCY
Color code	per DIN VDE 47100

Connection 1

Pluggable connector	D-subminiature female connector
Pole number 1	25
Connection type	System
Wire cross-section	0.25 mm ²

Connection 2

Connector	Schneider BMXAMM0600
Pole number	20
Connection type	System
Wire cross-section	0.25 mm ²

Physical data

Cable length	3 m
--------------	-----

Material data

Fire load	0 MJ
Weight	1.1 g

Environmental requirements

Ambient temperature (operation)	-20 ... +50 °C
---------------------------------	----------------

Commercial data

PU (SPU)	1 pcs
Packaging type	Box
GTIN	4055143039116

Product Classification

UNSPSC	26121629
ETIM 9.0	EC000237
ETIM 10.0	EC000237
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product
Compliance
706-3340/501-300



Documentation

System Description

WAGO System Wiring,
Selection Guide

pdf
533.15 KB

