



CAB-ECOWATT

5113225400 - CAB-150 ECOWATT N 230V50/60HZ N8 - ACOUSTIC CABINET FANS

Ventilador axial tubular com carcaça longa, hélice de alumínio com ângulo variável e acoplamento direto ao motor



Theoretical Working Point

Airflow	-
Static Pressure	0,000 Pa
Temperature	20 °C
Altitude	0 m
Density	1,2 kg/m ³
Frequency	50/60 Hz

Construction

Discharge diameter	150 mm
Fan size	150
Blades	0
Weight	9,27 kg


Motor Characteristics

Voltage	1-230V-50Hz
Maximum absorbed current	0,6 A
IP Rating	IP44
Motor insulation class	B

Working Point

Fan speed	1940
-----------	------

Performance Chart(s)

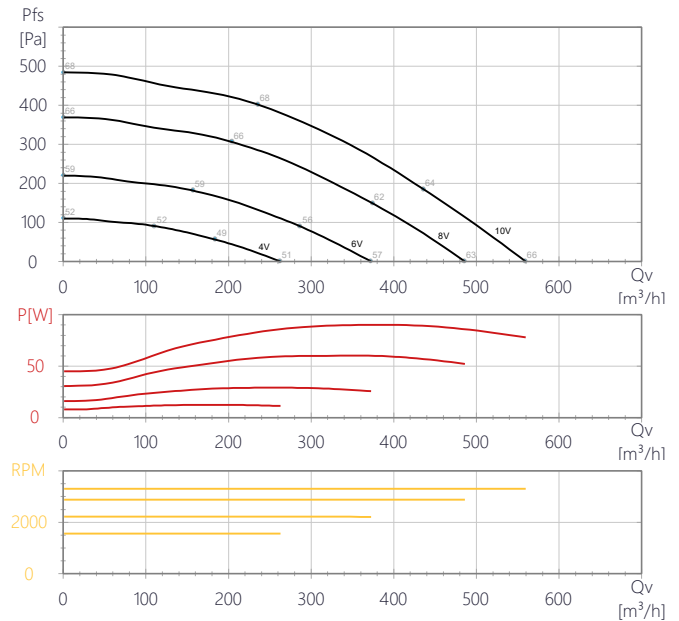

Sound Performance

	63	125	250	500	1k	2k	4k	8k	Overall
Inlet (LwA)	39	52	60	61	59	55	50	43	66
Inlet LpA @ 1m	28	41	49	50	48	44	39	32	55
Outlet (LwA)	34	47	57	59	57	53	48	42	63
Outlet LpA @ 1m	23	36	46	48	46	42	37	31	52
Surrounding (LwA)	42	48	50	50	48	44	39	31	56
Surrounding LpA @ 1m	31	37	39	39	37	33	28	20	45