

Features

- The streamlined, durable, lightweight die-cast aluminium body makes Start Flood IP65 a perfect choice for building facades, car parks, garages and construction areas. The product includes 1 m pre-wired stripped cable and fitting bracket for quick and easy installation and the universal mounting bracket allows wall or surface mounting with the possibility of vertical tilting. Black (RAL9017) housing, white reflector, 2000 lm, 17 W, 118 lm/W, 4000K, non dimmable, CRI>80, IP65, IK06, Class I, lifespan L70:B50: 90000 hrs, 100 x 108 x 23 mm (L x W x H). Weight: 0.26 kg.


Product Overview

Product name	START FLOOD IP65 2000LM 840 BLACK
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Floor standing
General application	Retail
ETIM Class	EC001744
Fixture luminous flux (lm)	2000
Luminaire efficacy (lm/W)	118
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Beam Angle (°)	110
Photobiological Risk Group	RG1
Total power consumption (W)	17
Electrical protection	Class I
Control gear type	Not required

START FLOOD IP65 2000LM 840 BLACK 0050174


Dimmable	No
Housing colour	Black
IP rating	IP65
IK rating	IK06
Product EAN number	5410288501741
Warranty	3 years
Dimming method	N/A
Useful luminous flux (#use)	2000

Photometry

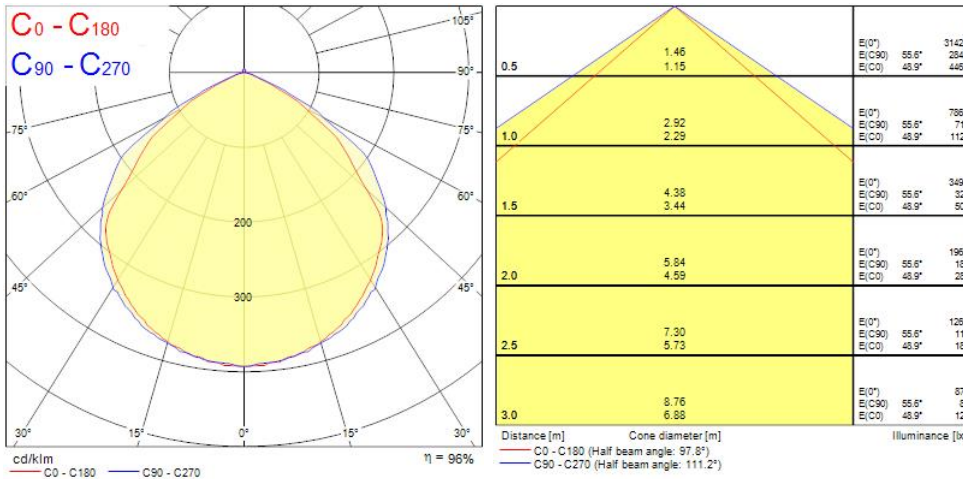

START FLOOD IP65 2000LM 840 BLACK 0050174

Technical drawings

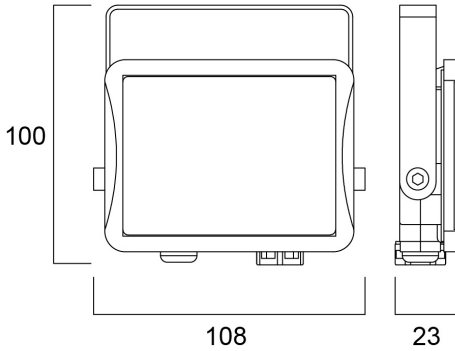

Data table

GENERAL DATA

Product name	START FLOOD IP65 2000LM 840 BLACK
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Floor standing
General application	Retail
Operating temperature range (°C)	-20°C...+40°C
ETIM Class	EC001744
Warranty	3 years

OPTICAL DATA

Useful luminous flux (#use)	2000
Fixture luminous flux (lm)	2000
Luminaire efficacy (lm/W)	118
Correlated colour temperature (k)	4000
Light colour	Neutral White

START FLOOD IP65 2000LM 840 BLACK 0050174

CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Beam Angle (°)	110
Distribution type	None
Photobiological Risk Group	RG1

ELECTRICAL DATA

Total power consumption (W)	17
Current (A)	0.07
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	20
Electrical protection	Class I
Control gear required	No
Control gear type	Not required
No. Of switching cycles before premature failures	>15000
Dimmable	No
Dimming method	N/A
Drive current (mA)	73
Inrush Current (A)	1
Inrush Duration (µs)	100
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	74
Max. products per 16A C Breaker	121
Max. products per 16A B Breaker	71
Connectable conductor cross section - Min (mm ²)	1
Connectable conductor cross section - Max (mm ²)	1

START FLOOD IP65 2000LM 840 BLACK 0050174

LIFETIME DATA

Lifespan L70 B50	90000
Lifespan L80 B10	50000

PHYSICAL DATA

Housing colour	Black
IP rating	IP65
IK rating	IK06
Diffuser finish	Transparent
Diffuser material	Glass
Reflector finish	White
Nominal Product Length (mm)	100
Nominal Product Width (mm)	108
Nominal Product Height (mm)	23
Weight (kg)	0.26

PACKAGING

Product EAN number	5410288501741
Packaging single length / height (cm)	13.0
Packaging single width (cm)	5.5
Packaging single depth (cm)	15.5
DUN14 (outer)	15410288501748
Units per outer package	6
Packaging outer length / height (cm)	36.0
Packaging outer width (cm)	14.5
Packaging outer depth (cm)	17.5

SAFETY DATA

Optimal operating condition (°C)	-20-40
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No

SYLVANIA

START FLOOD IP65 2000LM 840 BLACK
0050174
