


# Concord

OPTIX LINEAR RECESSED 1200 3000K ALU DALI

2023783

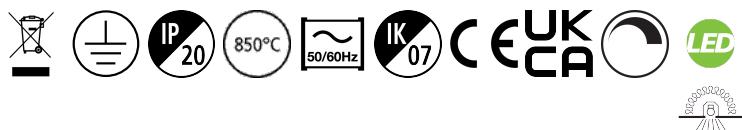

## Features

- OPTIX LINEAR RECESSED 1200 3000K ALU DALI is a high efficacy low glare linear luminaire for office and education applications. Suitable for continuous light line installations with accessories separately available. Ceiling recessed 1146x95x90 mm. Aluminised plastic extra low glare optics in a single line configuration. White RAL9016 fixture body. DALI dimmable. 3000K Warm White LED, CRI>80, chromaticity tolerance of 3-step MacAdam ellipse. Luminous flux 3200lm. Power consumption 24.5W. Luminaire efficacy 131lm/W. Lifespan: 48,500 hours L90B10. UGR<19, Luminance at 65°<200 Cd/m<sup>2</sup>, IK07, IP20. Ultra Low Flicker: <5% Photobiological safety risk group 1. Electrical protection Class I. Glow wire test 850°C. Suitable for use with Linect quick connection systems.

## Product Overview

Product name	OPTIX LINEAR RECESSED 1200 3000K ALU DALI
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
General application	Education, Office
ETIM Class	EC002892
Fixture luminous flux (lm)	3200
Luminous flux (lm)	3200
Luminaire efficacy (lm/W)	131
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80

Concord  
by SYLVANIA


# Concord

## OPTIX LINEAR RECESSED 1200 3000K ALU DALI

2023783

Colour Variation Initial (SDCM)	3
Glare control	< 19
Photobiological Risk Group	RG1
Total power consumption (W)	24.5
Electrical protection	Class I
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9016
IP rating	IP20
IK rating	IK07
Product EAN number	5025768237838
Warranty	5 years
Dimming method	DALI
Useful luminous flux (#use)	3200

### Photometry

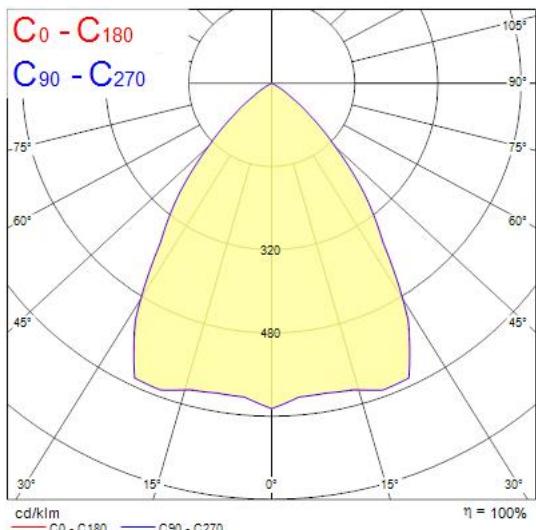

### Technical drawings

