




Features

- OPTIX SURFACE 1200 ASYMMETRIC 3000K is a surface or wall mounted LED Linear luminaire with Asymmetric Aluminium Reflector, Asymmetric Light Distribution, Luminaire Dimensions: 1200x200x50mm, Sylvania White body colour, IP20, IK07, Constant Current, Low LED flicker (+/-5%), Warm White (3000K) LED Colour Temperature, 3380lm, 30W, 113lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse) LED Colour Consistency, lifespan: 58,000 hours L90B10.

Product Overview

Product name	OPTIX SURFACE 1200 ASYMMETRIC 3000K
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting
Fixture luminous flux (lm)	3380
Luminaire efficacy (lm/W)	113
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Photobiological Risk Group	RG0
Total power consumption (W)	30
Electrical protection	Class I
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5025768216765
Warranty	5 years

Photometry

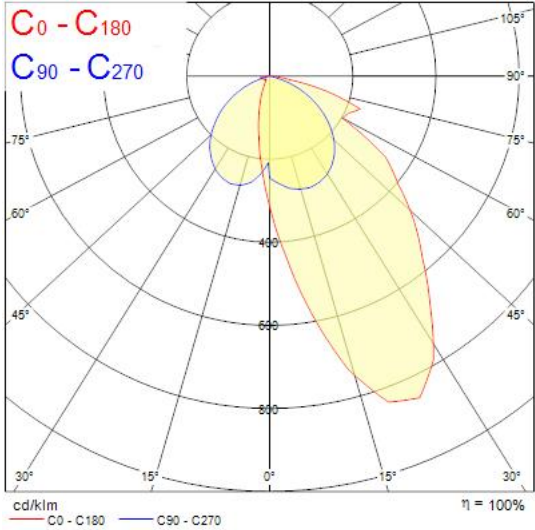

Technical drawings

