
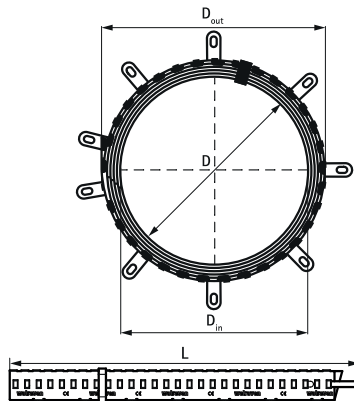


Walraven Pacifyre® BFC

(U0438)

Basic fire collar for plastic and multi-layer pipes

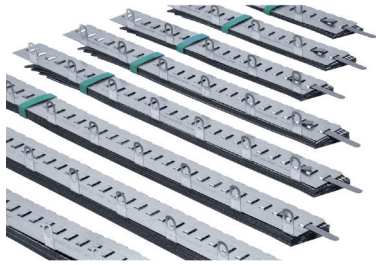

Features & benefits

- Easy to install
- Suitable for damp conditions
- Oversized for increased flexibility in positioning
- Up to 2 hours fire protection in wall penetrations
- Up to 4 hours fire protection on floor penetrations
- Low height increases installation flexibility
- For thin- and thick-walled pipes
- For flexible walls, solid walls and floors
- With a fire resistance up to EI 120 U/U
- Tested and approved according to EN 1366-3



Product Number	Outside Pipe Diameter	Inner Diameter	Outer Diameter	Total Width x Total Height x Total Depth	Number Of Fixations Needed
Reference letter	D	ID	OD	W x H x DtT	
Unit description	mm	mm	mm	mm x mm x mm	
2133000050	0 - 50	56	70	31 x 44 x 267	2
2133000063	51 - 63	67	90	33 x 44 x 313	3
2133000075	64 - 75	80	100	33 x 44 x 345	3
2133000090	76 - 90	98	125	35 x 44 x 423	3
2133000110	91 - 110	118	150	35 x 58 x 487	3
2133000125	111 - 125	130	160	37 x 44 x 533	4
2133000140	126 - 140	145	180	39 x 44 x 595	4
2133000160	141 - 160	165	200	39 x 44 x 659	4