

# Concord

## OPTIX RECESSED 4 CELLS 4000K ALU DALI

2021693



### Features

- OPTIX RECESSED 4 CELLS 4000K ALU DALI is a high efficacy low glare luminaire for office and education applications. Ceiling recessed 310x100 mm. Aluminised plastic extra low glare optics. White RAL9016 fixture body. DALI dimmable. 4000K Neutral White LED, CRI>80, chromaticity tolerance of 3-step MacAdam ellipse. Luminous flux 1010lm. Power consumption 9W. Luminaire efficacy 112lm/W. 42,000hrs L90B10 lifespan. UGR<18, Luminance at 65°<3000 Cd/m<sup>2</sup>, IK07, IP20. Photobiological safety risk group 1. Electrical protection Class I. Glow wire test 850°C.

### Product Overview

<b>Product name</b>	OPTIX RECESSED 4 CELLS 4000K ALU DALI
<b>Technology</b>	LED (3 SDCM)
<b>Cap/Base</b>	N/A
<b>Housing</b>	Steel
<b>Mount</b>	Ceiling recessed mounting
<b>Fixture rating</b>	Enclosed
<b>Fixture luminous flux (lm)</b>	1010
<b>Luminaire efficacy (lm/W)</b>	112
<b>Colour temperature (K)</b>	4000
<b>Light colour</b>	Neutral White
<b>CRI (Ra)</b>	80
<b>Colour Variation Initial (SDCM)</b>	3
<b>Glare control</b>	< 18
<b>Photobiological Risk Group</b>	RG1
<b>Total power consumption (W)</b>	9
<b>Electrical protection</b>	Class I
<b>Control gear type</b>	LED driver constant current
<b>LED Flickering Rate</b>	Ultra low (5% or less)
<b>Housing colour</b>	RAL 9016 - Traffic white / Bezel

Concord  
by SYLVANIA

# Concord

OPTIX RECESSED 4 CELLS 4000K ALU DALI

2021693

IP rating

IP20

IK rating

IK07


Product EAN number

5025768216932

Warranty

5 years

## Photometry

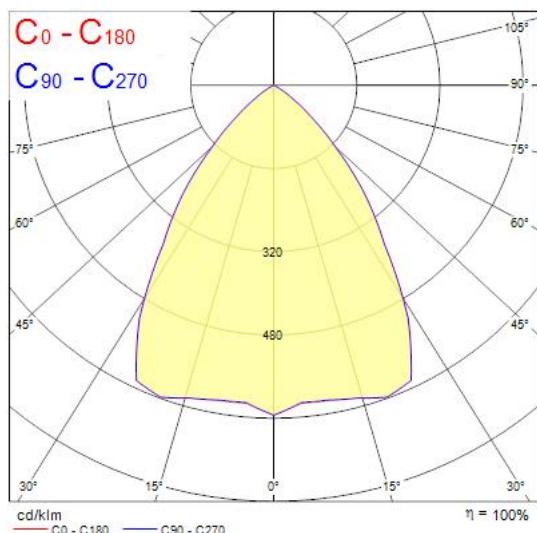

## Technical drawings

