



### Features

- Premium performance professional LED GU10 range with the same look and feel of traditional halogen GU10 lamp Recreates backlight effect similar to halogen dichroic lamps Full glass design - means no colours clashing between lamp and fixture Very long lifetime of up to 25,000 hours COOLFIT functionality – ensures overheat and over temperature protection High switching cycles: >100,000 High colour rendering: CRI90 Non dimmable Warranty: 5 Years




### Product Overview

Product name	REFLED SUPERIA RETRO ES50 V5 360LM 940 36 SL
Technology	LED
Lamp shape	Reflector
Cap/Base	GU10
Lamp finish	Fresnel lens
Fixture rating	Open
General application	Education, Hospitality, Museums & Galleries, Office, Residential & Consumer, Retail
ETIM Class	EC001959
Correlated colour temperature (k)	4000
Light colour	Cool White
CRI (Ra)	90
Colour Variation Initial (SDCM)	6
Beam Angle (°)	36
Photobiological Risk Group	RG1
Wattage (W)	3.7
Power consumption (W)	3.7

## REFLED SUPERIA RETRO ES50 V5 360LM 940 36 SL 0030706

Control gear type	LED driver constant current
Dimmable	No
Housing colour	Transparent
IP rating	IP20
Product EAN number	5410288307060
Warranty	5 years
Dimming method	N/A
Useful luminous flux (#use)	360

### Technical drawings

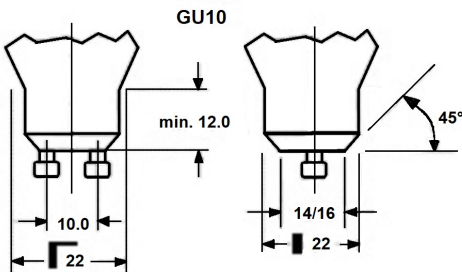

### Data table

#### GENERAL DATA

Product name	REFLED SUPERIA RETRO ES50 V5 360LM 940 36 SL
Technology	LED
Lamp shape	Reflector
Cap/Base	GU10
Lamp finish	Fresnel lens
Fixture rating	Open
General application	Education, Hospitality, Museums & Galleries, Office, Residential & Consumer, Retail
Operating temperature range (°C)	-20°C...+50°C
ETIM Class	EC001959
Warranty	5 years

### OPTICAL DATA

Useful luminous flux (#use)	360
Correlated colour temperature (k)	4000
Light colour	Cool White
CRI (Ra)	90
Colour Variation Initial (SDCM)	6
Luminous Intensity (cd)	650
Beam Angle (°)	36
Photobiological Risk Group	RG1

### ELECTRICAL DATA

Power consumption (W)	3.7
Wattage (W)	3.7
Equivalent watt (W)	50
Current (A)	0.04
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Control gear required	No
Control gear type	LED driver constant current
No. Of switching cycles before premature failures	>50000
Dimmable	No
Dimming method	N/A
Inrush Current (A)	5
Inrush Duration (µs)	145
Lamp Energy Label (class)	E
Nominal Frequency (Hz)	50/60Hz

### LIFETIME DATA

Lifespan L70 B50	25000
------------------	-------

### PHYSICAL DATA

Housing colour	Transparent
----------------	-------------

## REFLED SUPERIA RETRO ES50 V5 360LM 940 36 SL 0030706

IP rating	IP20
Nominal Product Height (mm)	54
Nominal Product Diameter (mm)	50
Weight (kg)	0.038

### PACKAGING

Product EAN number	5410288307060
Packaging single length / height (cm)	8.2
Packaging single width (cm)	6.1
Packaging single depth (cm)	5.1
DUN14 (inner)	15410288307067
Units per inner package	6
Packaging inner length / height (cm)	19.4
Packaging inner width (cm)	11.1
Packaging inner depth (cm)	9.2
DUN14 (outer)	25410288307064
Units per outer package	60
Packaging outer length / height (cm)	58.5
Packaging outer width (cm)	20.8
Packaging outer depth (cm)	20.8

### SAFETY DATA

Optimal operating condition (°C)	-20-50
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	None

# SYLVANIA

REFLED SUPERIA RETRO ES50 V5 360LM 940 36 SL  
0030706

## Energy label



0030706



4  
kWh/1000h



2019/2015



0030706



4  
kWh/1000h



2019/2015