

Product data sheet Spirotech

Product name

EMCC Duo-1 max 5,6bar

Product properties

The MultiControl COOL DUO is an automatic expansion and pressure-maintaining device, with 2 pumps (2x 50%) and 1 overflow valve, designed for cooling systems. An unpressurised expansion tank is required.

- 2 pumps (2x 50%)
- 1 overflow valve (1x 100%)
- Operational pressure range up to 4,0 or 5,6 bar
- An unpressurised expansion vessel is required
- Maximum expansion volume: 125 – 500 liters
- The minimum temperature at the point of connection: -10°C
- The maximum temperature at the point of connection: 70°C (over 70°C possible with auxiliary tank)
- Maximum operating pressure (PN): 10 bar


Article number

EMCC-D1-5.6

Product image



Product dimensions

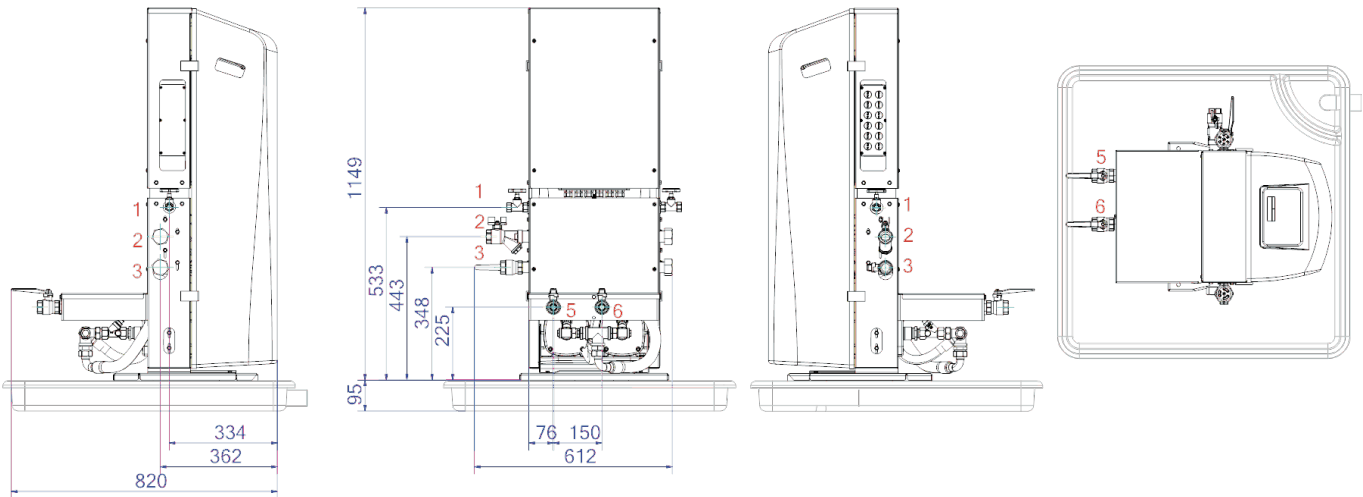

1. Refill connection	Rp1/2
2. Expansion overflow pipe	Rp1
3. Expansion pressure pipe	Rp1

5. Suction line from expansion vessel	R1
6. Overflow line to the expansion tank	R1

Product data sheet Spirotech

ETIM product data

Height	1149 mm
Max. operating pressure	5.6 bar
Connection	Other
Power consumption	1.5 kW
Couplable	Yes
Electrical connection	Connection cable with plug
Function master/slave	No
With pressure expansion vessel	No
Digital control unit	Yes

Double pump/compressor unit	Yes
With exchangeable membrane	No
Compressor in base	No
Nominal diameter expansion connection	1 inch (25)
Max. medium temperature (continuous)	70 °C
Horizontal positioning	No
Connection voltage	230 V
Article compression class	PN 10

Disclaimer

This product sheet has been compiled with the greatest possible care. Nevertheless, it may contain errors or omissions. For the most current and correct information we refer you to our website.

