

### Features

- OPTICLIP R 600 840 2L WHT MP is a high efficacy low glare ceiling recessed mounted luminaire with replaceable light engines for office and education applications. White colour plastic optic (reflector + lens), direct light distribution. Luminaire dimensions: 595x595x17mm. White body colour (RAL9016), IP40 (from the front), IK07, 8-steps dip switch non-dimmable driver, 15.5-33W power consumption, (output options: 4700lm/33W, 4500lm/31W, 4100lm/28W, 3750lm/25.5W, 3450lm/23W, 3050lm/20.5W, 2700lm/18.5W and 2250lm/15.5W), 4000K (neutral white) CCT, 4700lm luminous flux at 900mA drive current level, 142lm/W system efficacy, CRI>80, SDCM≤3 (3-step MacAdam ellipse) LED Colour Consistency, UGR<16, luminance at 65° < 1000 cd/m<sup>2</sup>. Lifespan: 100,000 hours L80B20, photobiological safety risk group 1. Electrical protection Class II. Glow wire test 850°C.


### Product Overview

<b>Product name</b>	OPTICLIP R 600 840 2L WHT MP
<b>Technology</b>	LED
<b>Cap/Base</b>	N/A
<b>Housing</b>	Steel
<b>Mount</b>	Ceiling recessed mounting
<b>General application</b>	Education, Office
<b>ETIM Class</b>	EC002892
<b>E-number FI</b>	4170618
<b>Fixture luminous flux (lm)</b>	4700
<b>Luminaire efficacy (lm/W)</b>	142
<b>Correlated colour temperature (k)</b>	4000
<b>Light colour</b>	Neutral White


## OPTICLIP R 600 840 2L WHT MP 0034005

CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	75
Glare control	< 16
Photobiological Risk Group	RG1
Total power consumption (W)	33
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9016
IP rating	IP40/20
IK rating	IK07
Product EAN number	5410288340050
Warranty	5 years
Dimming method	N/A

### Photometry

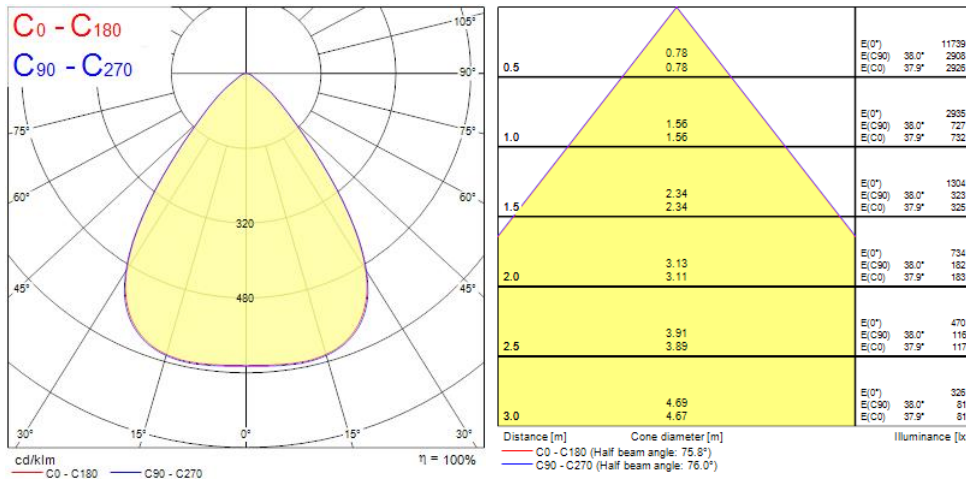

## Technical drawings

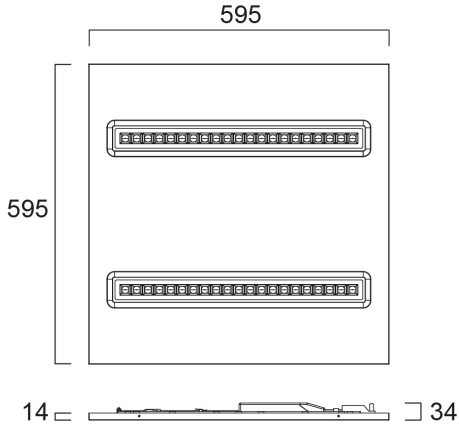

## Data table

### GENERAL DATA

<b>Product name</b>	OPTICLIP R 600 840 2L WHT MP
<b>Technology</b>	LED
<b>Cap/Base</b>	N/A
<b>Housing</b>	Steel
<b>Mount</b>	Ceiling recessed mounting
<b>General application</b>	Education, Office
<b>Operating temperature range (°C)</b>	5°C...+35°C
<b>Performance ambient temperature Tq (°C)</b>	25
<b>ETIM Class</b>	EC002892
<b>E-number FI</b>	4170618
<b>Warranty</b>	5 years

### OPTICAL DATA

<b>Fixture luminous flux (lm)</b>	4700
<b>Luminaire efficacy (lm/W)</b>	142

## OPTICLIP R 600 840 2L WHT MP 0034005

Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	75
Distribution type	Symmetric
Glare control	< 16
Photobiological Risk Group	RG1

### ELECTRICAL DATA

Total power consumption (W)	33
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	15
Electrical protection	Class II
Control gear required	No
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Min. drive current (mA)	400
Max. drive current (mA)	900
Drive current - Range (mA)	400mA / 900mA
Inrush Current (A)	25
Inrush Duration (µs)	200
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	34
Max. products per 16A C Breaker	56
Max. products per 16A B Breaker	33
Connectable conductor cross section - Max (mm <sup>2</sup> )	1.5

### LIFETIME DATA

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B20	50000

### PHYSICAL DATA

Housing colour	RAL9016
IP rating	IP40/20
IK rating	IK07
Diffuser finish	Other
Diffuser material	None
Nominal Product Length (mm)	595
Nominal Product Width (mm)	595
Nominal Product Height (mm)	14
Weight (kg)	2.66

### PACKAGING

Product EAN number	5410288340050
Packaging single length / height (cm)	60.0
Packaging single width (cm)	3.4
Packaging single depth (cm)	66.9
DUN14 (inner)	15410288340057
Units per outer package	4
Packaging outer length / height (cm)	68.5
Packaging outer width (cm)	61.5
Packaging outer depth (cm)	15.5

### SAFETY DATA

Glow Wire Test (°C)	650
Optimal operating condition (°C)	5-35
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No

**SYLVANIA**

OPTICLIP R 600 840 2L WHT MP  
**0034005**

---



**Light your world**