


Walraven KSB1 Clamp (M8)

(A05108)

for steel, copper, cast iron and plastic (multilayer) pipe

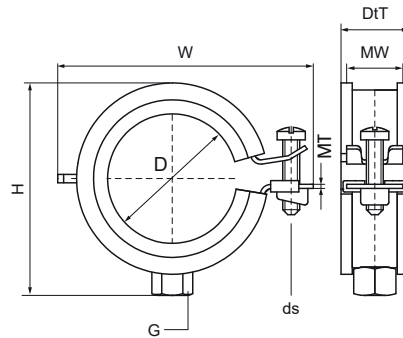

Features & benefits

- single screw clamp
- with quick locking system, type KSB
- clamp easy to close with one hand
- material: steel
- zinc plated
- sound insulating lining according DIN 4109
- noise reduction according to ISO 3822-1 up to 23 dB(A)



Product Number	NRF Number	Outside Pipe Diameter	DN	Pipe Diameter Imperial	Connection Thread	Material Width	Material Thickness	Screw Size	Total Height	Total Width	Total Depth	Approvals	Maximum Allowed Load Faz
Reference Letter		D	D	D	G	MW	MT	ds	H	W	DtT		Fo,z
Unit description		mm		"		mm	mm		mm	mm	mm		N
3363014	3484062	13 - 14	DN 8	1/4	M8	20	1.00	M6	37	47	24	CE, ETA, ISO 3822-1, EPD	350
3363018		15 - 18	DN 10	3/8	M8	20	1.00	M6	38	47	25	CE, ETA, RAL-GZ 655/B, ISO 3822-1, EPD	350
3363023		20 - 23	DN 15	1/2	M8	20	1.00	M6	43	52	25	CE, ETA, RAL-GZ 655/B, ISO 3822-1, EPD	350
3363028		25 - 28	DN 20	3/4	M8	20	1.00	M6	48	57	25	CE, ETA, RAL-GZ 655/B, ISO 3822-1, EPD	450
3363035		32 - 35	DN 25	1	M8	20	1.00	M6	55	63	25	CE, ETA, RAL-GZ 655/B, ISO 3822-1, EPD	450
3363043		40 - 43	DN 32	1 1/4	M8	20	1.25	M6	63	72	25	CE, ETA, RAL-GZ 655/B, ISO 3822-1, EPD	600
3363051		48 - 51	DN 40	1 1/2	M8	20	1.25	M6	71	80	25	CE, ETA, RAL-GZ 655/B, ISO 3822-1, EPD	600
3363054		53 - 56	-	-	M8	20	1.25	M6	76	85	25	CE, ETA, RAL-GZ 655/B, ISO 3822-1, EPD	600
3363062		58 - 63	DN 50	2	M8	20	1.25	M6	82	91	25	CE, ETA, RAL-GZ 655/B, ISO 3822-1, EPD	600