


Walraven Bifix® 300 Stainless Steel (M8)

(M1005)

for stainless steel and plastic pipes

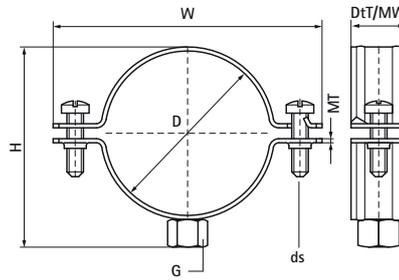

Features & benefits

- two-screw clamp
- with quick locking system
- material: stainless steel 1.4404 (AISI 316L)



Product Number	VVS Number	DN	Pipe Diameter Imperial	Connection Thread	Total Height	Total Width	Total Depth	Material Width	Material Thickness	Screw Size	Maximum Allowed Load Faz	Approvals
Reference letter		D	D	G	H	W	DeT	MW	MT	ds	Fa,z	
Unit description			"		mm	mm	mm	mm	mm		N	
3017017	018014117	DN 10	3/8	M8	31	56	20	20	1.25	M6	1,000	RAL-GZ 655/B, ITB (KOT), EPD
3017022	018014122	DN 15	1/2	M8	33	58	20	20	1.25	M6	1,000	RAL-GZ 655/B, ITB (KOT), EPD
3017030	018014130	DN 20	3/4	M8	39	64	20	20	1.25	M6	1,000	RAL-GZ 655/B, ITB (KOT), EPD
3017034	018014134	DN 25	1	M8	47	72	20	20	1.25	M6	1,000	RAL-GZ 655/B, ITB (KOT), EPD
3017042	018014142	DN 32	1 1/4	M8	54	80	20	20	1.25	M6	1,000	RAL-GZ 655/B, ITB (KOT), EPD
3017051	018014151	DN 40	1 1/2	M8	62	87	20	20	1.25	M6	1,000	RAL-GZ 655/B, ITB (KOT), EPD
3017060	018014160	-	-	M8	71	96	20	20	1.25	M6	1,000	RAL-GZ 655/B, ITB (KOT), EPD
3017076	018014163	-	-	M8	86	109	20	20	2.00	M6	1,500	RAL-GZ 655/B, ITB (KOT), EPD
3017089	018014165	DN 80	3	M8	101	124	20	20	2.00	M6	1,500	RAL-GZ 655/B, ITB (KOT), EPD
3017118	018014175	DN 100	4	M8	131	154	20	20	2.50	M6	1,900	RAL-GZ 655/B, ITB (KOT), EPD