


## VVSK-T202020: T-piece for manifold Ø20

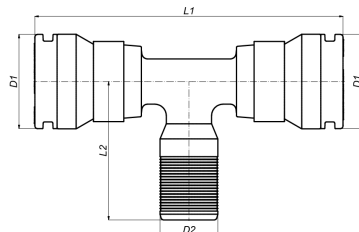

### Commercial information

Synthetic T-piece for manifold via male connector, with 2x SK connectors

#### Certificates

QB (CSTBat), ETA, KIWA, ÖVGW Wasser, SINTEF, SITAC, KOMO, STF, GOST-R, TSU, EMI

#### Applications

Potable water, Heating, Cooling, Sanitary

#### Solutions

Building installations, Industry, Utility

## Technical characteristics

Material connection 1	Polyvinylidene fluoride (PVDF)	Angle	90 Degrees
Surface protection connection 1	Untreated	Outer pipe diameter connection 1	20 Millimetre
Surface treatment connection 1	Untreated	Wall thickness, connection 1	2.25 Millimetre
Material connection 2	Polyvinylidene fluoride (PVDF)	Outer pipe diameter connection 3	20 Millimetre
Surface protection connection 2	Untreated	Wall thickness, connection 3	2.25 Millimetre
Surface treatment connection 2	Untreated	Wrench width	0 Millimetre
Material connection 3	Polyvinylidene fluoride (PVDF)	Max. operating pressure at 20 °C	10 Bar
Surface treatment connection 3	Untreated	Wrench width union nut	0 Millimetre
Model	T-piece	Medium temperature (continuous)	-10 70 Degrees celsius
Swept entry type (with inner radius)	✗	Standard Dimension Ratio (SDR)	0
Reducing	✗		
System specific	✓		
Connection 1	Insert (push-fitting)		
Contour code connection 1	Other		
Connection 2	Insert (push-fitting)		
Contour code connection 2	Other		
Connection 3	Insert (push-fitting)		
Contour code connection 3	Other		
Flange standard	Other		
Material sealing	Ethylene-propylene diene monomer rubber (EPDM)		
Main colour fitting	White		
High tensile strength	✗		
Ring stiffness class	Other		
With sealing rings/gaskets	✓		
With drain valve	✗		
With de-aerator	✗		
With thermal insulation	✗		
With buffer stud	✗		
Capped	✗		
FM quality mark	✗		
LPCB quality mark	✗		
ULC quality mark	✗		
UL quality mark	✗		
DIN-CERTCO certificate	✗		
VdS quality mark	✗		
With approval for TÜV	✗		
DVGW quality mark for gas	✗		
DVGW quality mark for water	✓		
KIWA certified	✓		
Gastec QA mark	✗		
KOMO certified	✓		
Type approval according to BBR/EKS	✗		

## Related products